



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**JOHN DEERE 30218**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON 15W40 (--- GAL)**

## RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0846787</b>	WC0856922	WC0822781
Sample Date		Client Info		<b>05 Jan 2024</b>	01 Nov 2023	14 Aug 2023
Machine Age	hrs	Client Info		<b>1618</b>	1390	1147
Oil Age	hrs	Client Info		<b>1250</b>	250	750
Filter Age	hrs	Client Info		<b>1250</b>	250	750
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>22</b>	44	32
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>4</b>	5	2
Lead	ppm	ASTM D5185m	>26	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>8</b>	18	7
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	1
Fuel	%	ASTM D3524	>2.1	<b>1.4</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.6	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.5</b>	13.2	9.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	18.8	22.7
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>50	<b>2</b>	4	1
Boron	ppm	ASTM D5185m		<b>363</b>	265	298
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>89</b>	13	105
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>386</b>	72	444
Calcium	ppm	ASTM D5185m		<b>1630</b>	4342	1546
Phosphorus	ppm	ASTM D5185m		<b>1021</b>	1097	1005
Zinc	ppm	ASTM D5185m		<b>1210</b>	1223	1306
Sulfur	ppm	ASTM D5185m		<b>2989</b>	2806	3928
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.5</b>	13.0	16.4
Base Number (BN)	mg KOH/g	ASTM D2896		<b>6.8</b>	13.4	5.3
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.4</b>	13.4	13.2

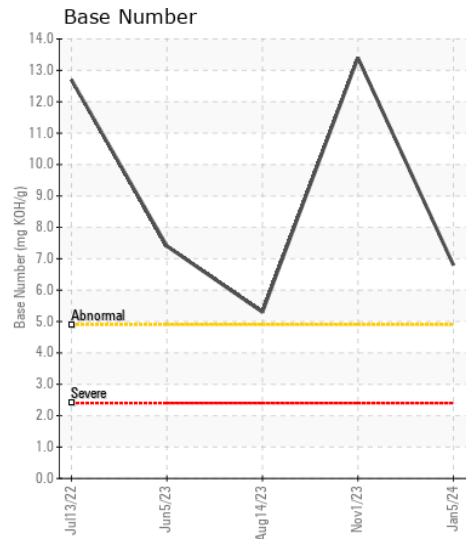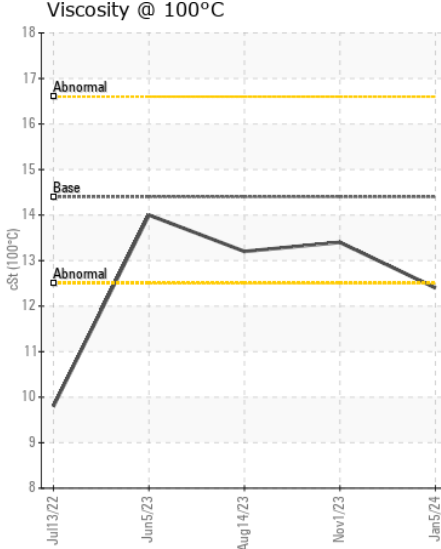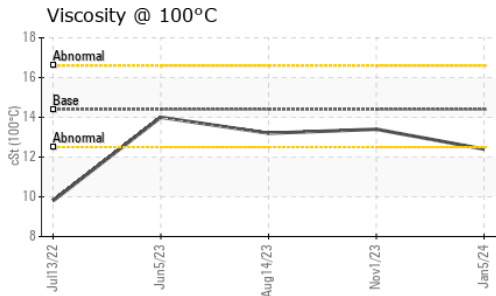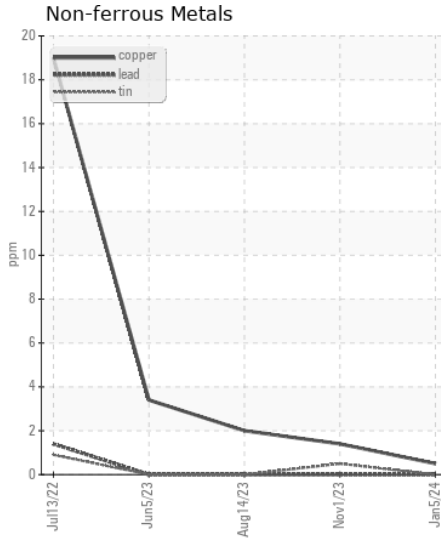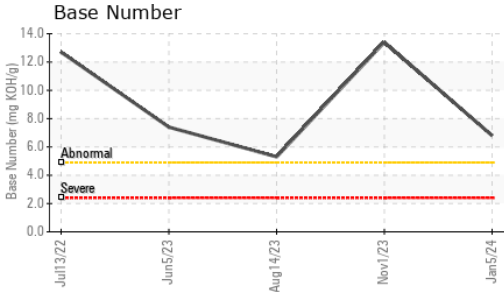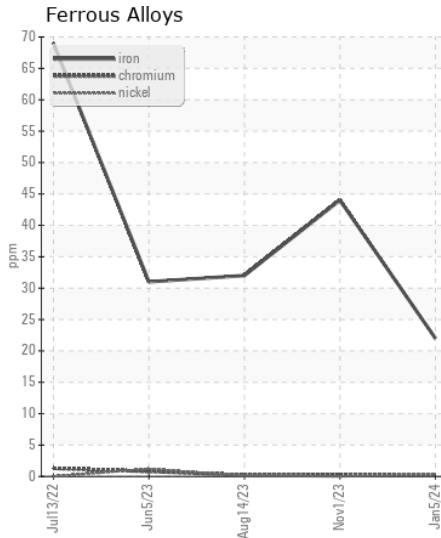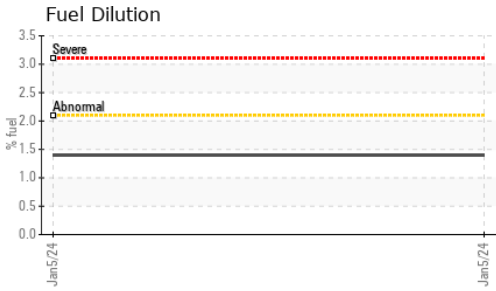

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0846787 **Received** : 16 Jan 2024  
**Lab Number** : 06060622 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10832004 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**SULLIVAN EASTERN INC**  
 2860 C SLATER RD  
 MORRISVILLE, NC  
 US 27560  
 Contact: SCOTT SULLIVAN  
 ssullivan@sullivaneastern.com  
 T: (919)484-8993  
 F: (919)484-2136