



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CHEVROLET 12346
Component
Gasoline Engine
Fluid
CHEVRON SUPREME MOTOR OIL 5W30 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0882875	WC0846683	WC0822594
Sample Date		Client Info		11 Jan 2024	16 Oct 2023	07 Jul 2023
Machine Age	mls	Client Info		265072	259386	252257
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	20	16	14
Chromium	ppm	ASTM D5185m	>20	2	2	1
Nickel	ppm	ASTM D5185m	>5	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>40	5	6	4
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>155	4	6	4
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		<1	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	24	25	9
Potassium	ppm	ASTM D5185m	>20	2	2	2
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	13.6	13.2	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	26.4	26.7	23.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>400	4	<1	3
Boron	ppm	ASTM D5185m		32	16	26
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		19	35	96
Manganese	ppm	ASTM D5185m		3	3	<1
Magnesium	ppm	ASTM D5185m		703	808	474
Calcium	ppm	ASTM D5185m		1280	1396	1037
Phosphorus	ppm	ASTM D5185m	780	727	805	648
Zinc	ppm	ASTM D5185m	860	852	1005	766
Sulfur	ppm	ASTM D5185m		2768	3231	2694
Oxidation	Abs/.1mm	*ASTM D7414	>25	22.5	23.7	17.3
Base Number (BN)	mg KOH/g	ASTM D2896	7.8	4.0	3.8	4.2
Visc @ 100°C	cSt	ASTM D445	9.7	13.2	12.9	10.0

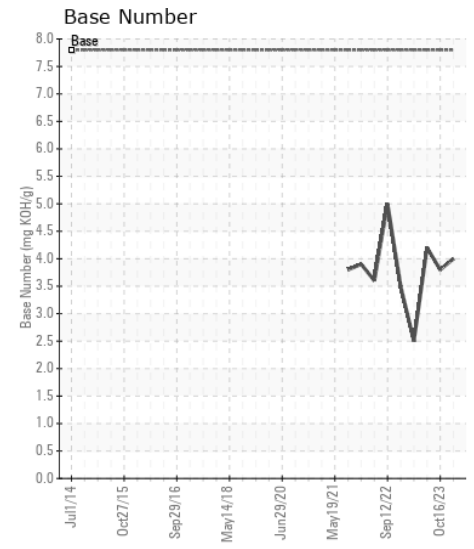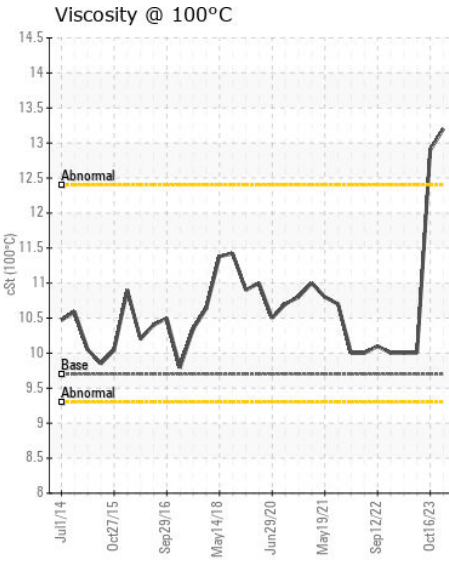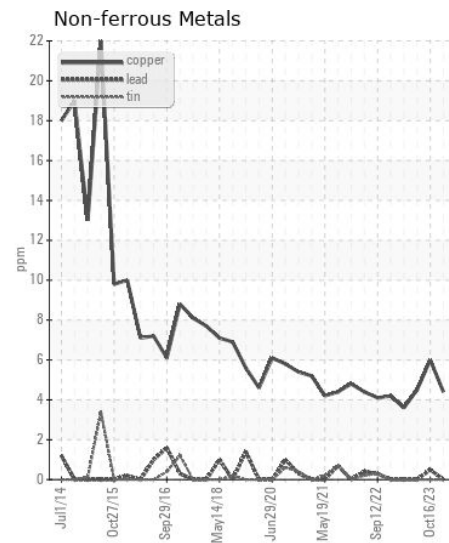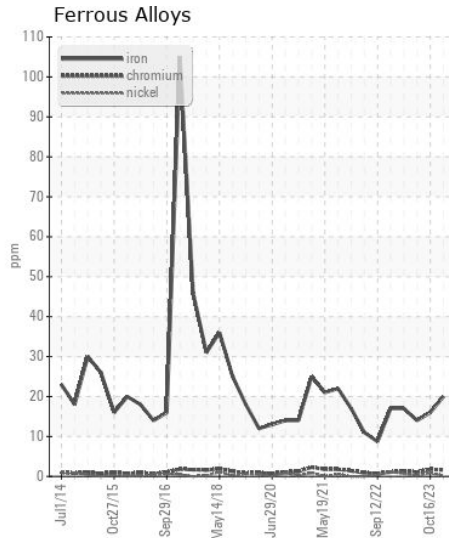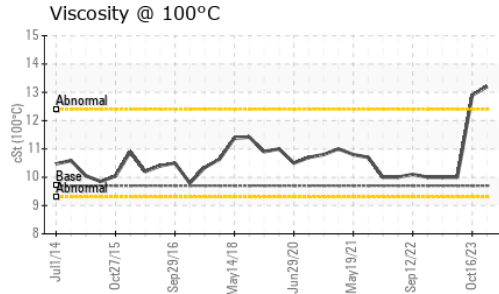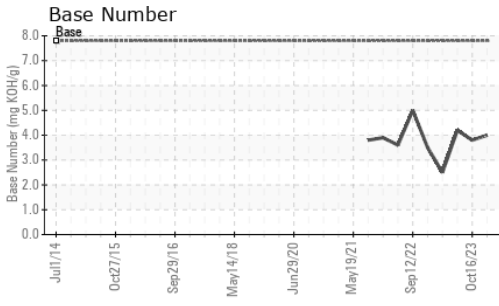

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0882875 **Received** : 16 Jan 2024
Lab Number : 06060629 **Diagnosed** : 16 Jan 2024
Unique Number : 10832011 **Diagnostician** : Don Baldrige
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

SULLIVAN EASTERN INC
 2860 C SLATER RD
 MORRISVILLE, NC
 US 27560
 Contact: SCOTT SULLIVAN
 ssullivan@sullivaneastern.com
 T: (919)484-8993
 F: (919)484-2136