



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION

Machine Id
INTERNATIONAL 1809

Component
Diesel Engine

Fluid
SHELL ROTELLA T 15W40 (48 QTS)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0886850	WC0730647	WC0730677
Sample Date		Client Info		06 Jan 2024	02 Sep 2023	09 Dec 2022
Machine Age	mls	Client Info		0	428077	401322
Oil Age	mls	Client Info		11480	0	0
Filter Age	mls	Client Info		11480	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				ATTENTION	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	19	43	28
Chromium	ppm	ASTM D5185m	>20	<1	1	1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>20	<1	3	2
Lead	ppm	ASTM D5185m	>40	2	6	2
Copper	ppm	ASTM D5185m	>330	<1	1	<1
Tin	ppm	ASTM D5185m	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	4	8	5
Potassium	ppm	ASTM D5185m	>20	0	4	3
Fuel	%	ASTM D3524	>3.0	0.3	<1.0	0.8
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>6	0.3	0.4	0.4
Nitration	Abs/cm	*ASTM D7624	>20	10.4	11.4	11.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.2	27.9	25.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m		1	3	<1
Boron	ppm	ASTM D5185m	316	11	25	36
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	1.2	62	58	74
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	24	906	355	410
Calcium	ppm	ASTM D5185m	2292	1120	2127	1849
Phosphorus	ppm	ASTM D5185m	1064	1041	1058	1021
Zinc	ppm	ASTM D5185m	1160	1276	1386	1271
Sulfur	ppm	ASTM D5185m	4996	3041	3798	3679
Oxidation	Abs/.1mm	*ASTM D7414	>25	19.0	25.6	21.9
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.7	4.0	7.2
Visc @ 100°C	cSt	ASTM D445	15.7	▲ 11.1	13.7	13.5


▲ Viscosity @ 100°C

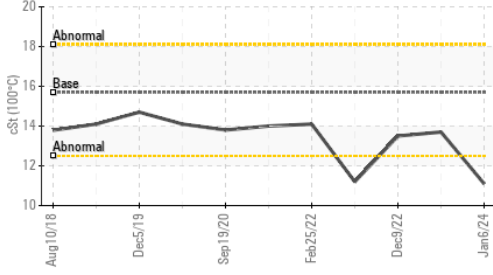


Ferrous Alloys

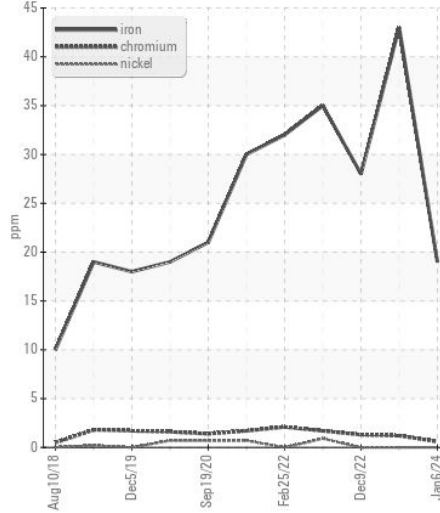


Fuel Dilution

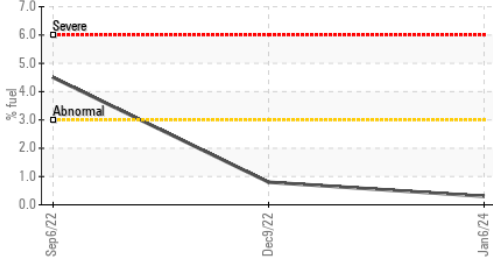


Non-ferrous Metals

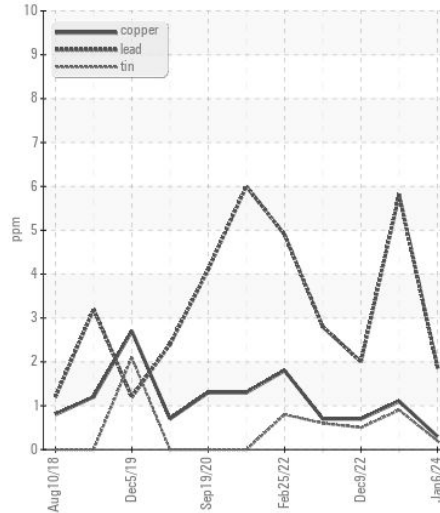


Base Number

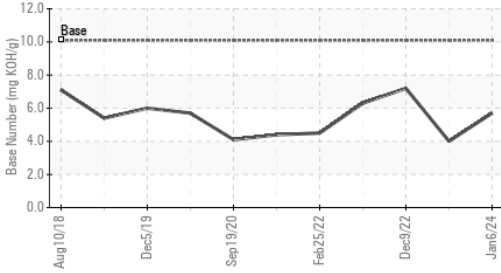

▲ Viscosity @ 100°C

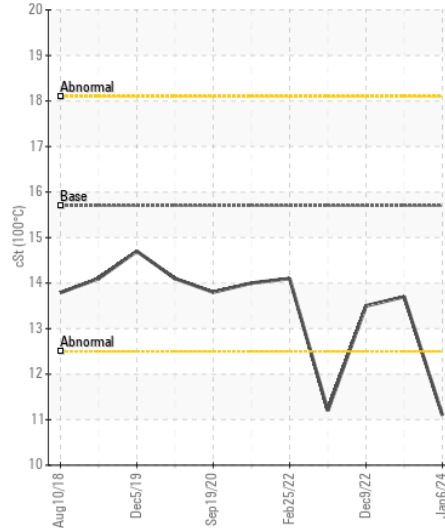

Base Number

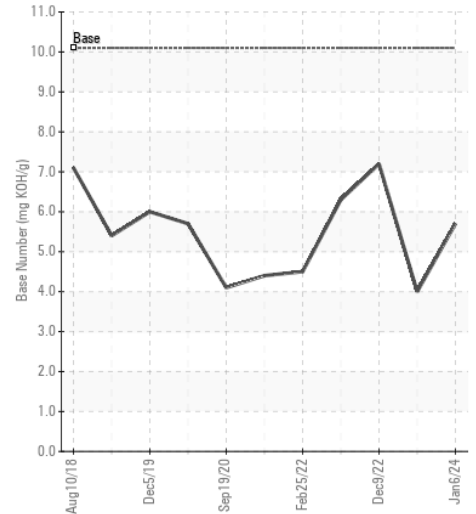

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0886850 **Received** : 16 Jan 2024
Lab Number : 06060669 **Diagnosed** : 18 Jan 2024
Unique Number : 10832051 **Diagnostician** : Don Baldrige
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

CARCO TRANSPORTATION
 2801 MIDLAND BLVD.
 FORT SMITH, AR
 US 72904
 Contact: RON BALL
 rball@carcotrans.com
 T: (479)441-3228
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)