



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[HERITAGE SITE DEV]**

Machine Id

**JOHN DEERE 350G 1FF350GXVMF815188**

Component

**Diesel Engine**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (28 QTS)****RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0195342</b>	JR0195222	JR0169960
Sample Date		Client Info		<b>08 Jan 2024</b>	16 Nov 2023	23 Aug 2023
Machine Age	hrs	Client Info		<b>4476</b>	4339	4002
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	Changed
Filter Changed		Client Info		<b>Changed</b>	N/A	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>35</b>	23	23
Chromium	ppm	ASTM D5185m	>11	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	2	2
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	4	1
Lead	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m	>26	<b>&lt;1</b>	0	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	<b>7</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	<1	0
Fuel		WC Method	>2.1	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.21	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.0</b>	7.4	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.3</b>	21.0	20.3
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	<b>&lt;1</b>	<1	1
Boron	ppm	ASTM D5185m		<b>223</b>	229	298
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>243</b>	233	250
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>830</b>	798	821
Calcium	ppm	ASTM D5185m		<b>1415</b>	1368	1437
Phosphorus	ppm	ASTM D5185m		<b>922</b>	865	893
Zinc	ppm	ASTM D5185m		<b>1085</b>	1045	1089
Sulfur	ppm	ASTM D5185m		<b>3007</b>	2958	3754
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.0</b>	15.4	15.5
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>8.9</b>	9.3	9.9
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.2</b>	13.43	13.6

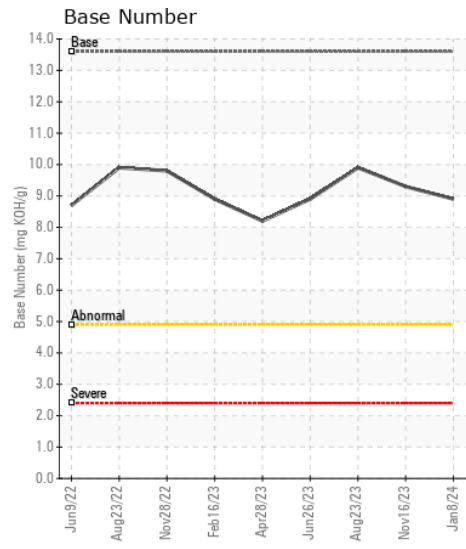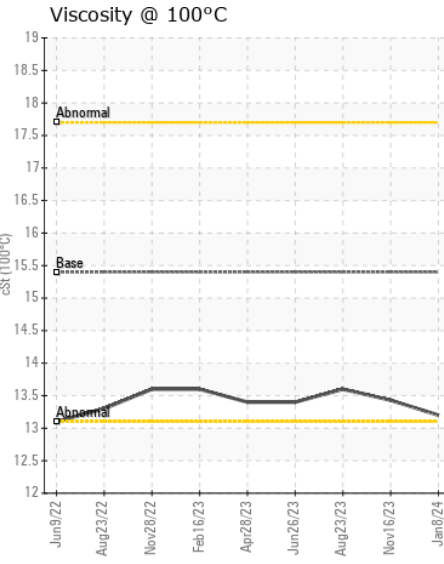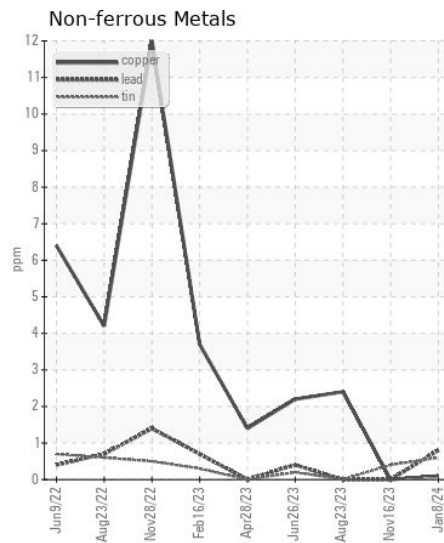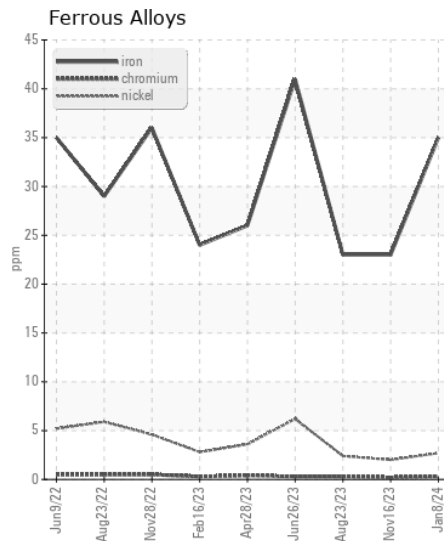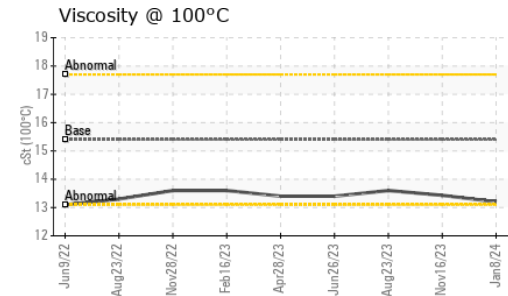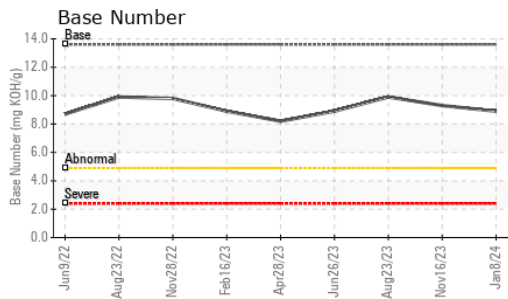

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0195342 **Received** : 16 Jan 2024  
**Lab Number** : 06060814 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832196 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**JRE - STEPHENSON**  
 245 YARDMASTER COURT  
 STEPHENSON, VA  
 US 22656-1761  
 Contact: PHIL DAUGHERTY  
 pdaugherty@jamesriverequipment.com  
 T: x:  
 F: (540)693-2588

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)