



Machine Id
JOHN DEERE 1025R 1LV1025RPLK805066

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0137480	---	---
Sample Date		Client Info		11 Jan 2024	---	---
Machine Age	hrs	Client Info		472	---	---
Oil Age	hrs	Client Info		472	---	---
Filter Age	hrs	Client Info		472	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

WEAR

Cylinder, crank, or cam shaft wear is indicated. All other metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	▲ 146	---	---
Chromium	ppm	ASTM D5185m	>11	4	---	---
Nickel	ppm	ASTM D5185m	>5	3	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	15	---	---
Lead	ppm	ASTM D5185m	>26	1	---	---
Copper	ppm	ASTM D5185m	>26	21	---	---
Tin	ppm	ASTM D5185m	>4	3	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION

Fuel content negligible. Elemental level of silicon (Si) above normal indicating ingress of seal material.


Silicon	ppm	ASTM D5185m	>22	▲ 118	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Fuel	%	ASTM D3524	>2.1	0.9	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.7	---	---
Nitration	Abs/cm	*ASTM D7624	>20	16.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	30.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	29	---	---
Boron	ppm	ASTM D5185m		85	---	---
Barium	ppm	ASTM D5185m		8	---	---
Molybdenum	ppm	ASTM D5185m		256	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m		738	---	---
Calcium	ppm	ASTM D5185m		2321	---	---
Phosphorus	ppm	ASTM D5185m		1105	---	---
Zinc	ppm	ASTM D5185m		1343	---	---
Sulfur	ppm	ASTM D5185m		3798	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	24.4	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.4	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	▲ 11.8	---	---


▲ Ferrous Alloys

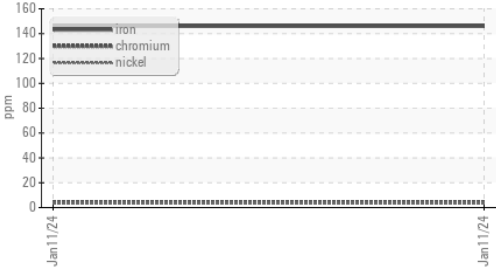


▲ Iron (ppm)

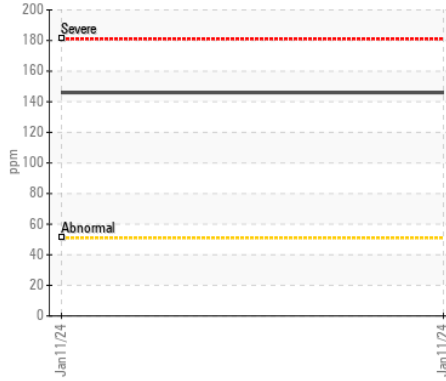


Lead (ppm)

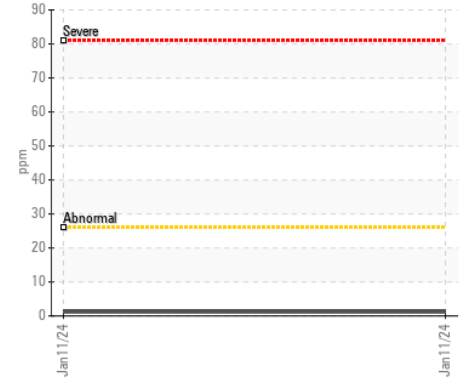


▲ Silicon (ppm)

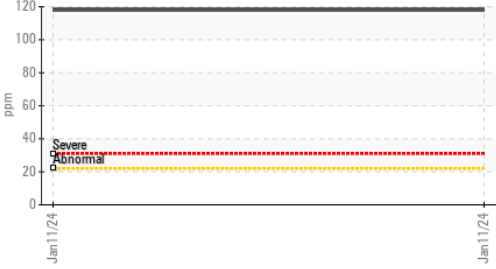

Aluminum (ppm)

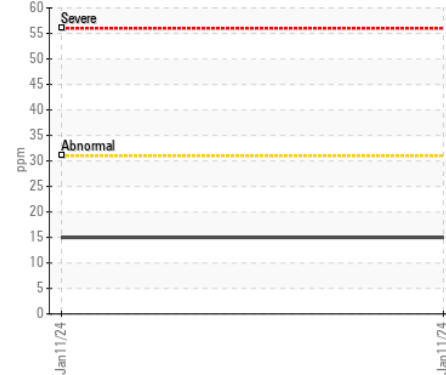


Chromium (ppm)

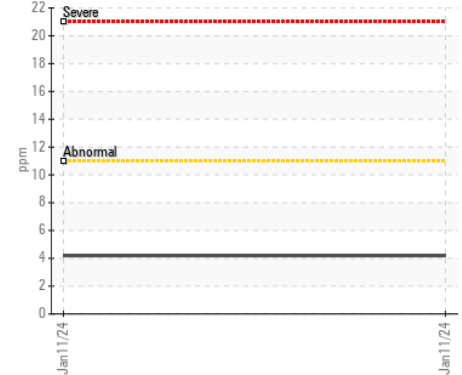


▲ Viscosity @ 100°C




Copper (ppm)

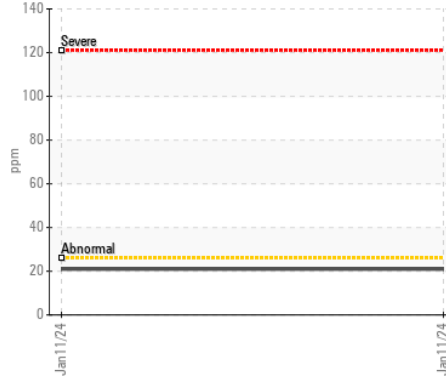


▲ Silicon (ppm)

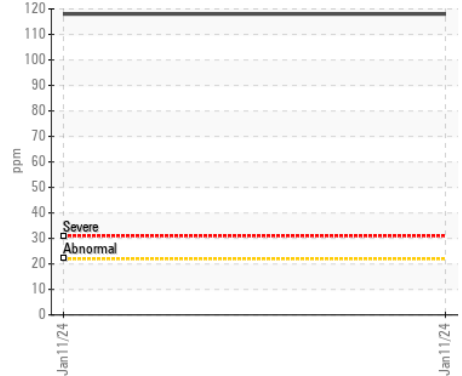


Fuel Dilution

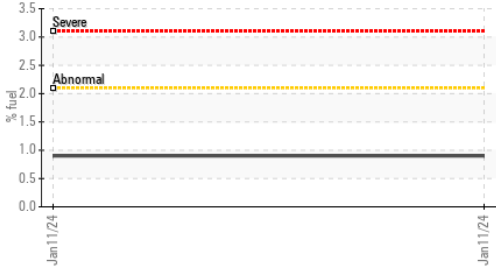


▲ Viscosity @ 100°C

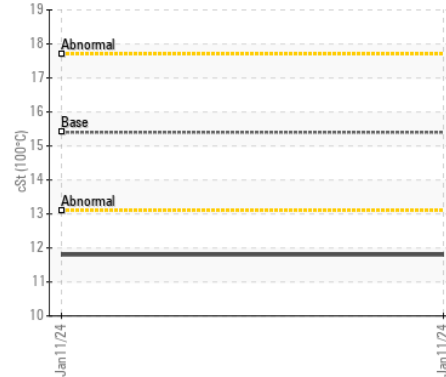

Base Number

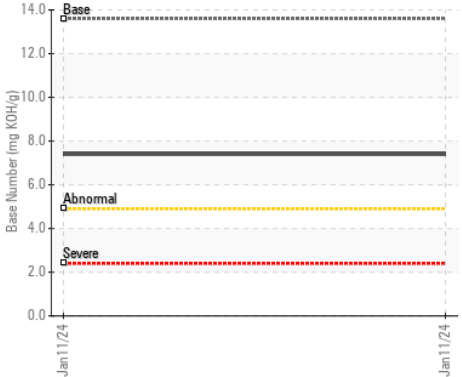

Base Number

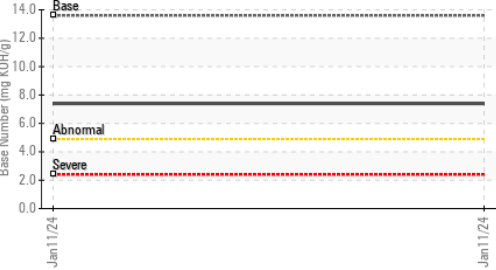

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0137480 **Received** : 16 Jan 2024
Lab Number : 06060859 **Diagnosed** : 18 Jan 2024
Unique Number : 10832241 **Diagnostician** : Don Baldrige
Test Package : MOBCE (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - WILKESBORO
 288 WESTGATE DRIVE
 WILKESBORO, NC
 US 28697

Contact: BUTCH JANES
 bjanes@jamesriverequipment.com

T: (336)973-8201
 F: (336)973-8496