



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ABNORMAL



Machine Id
JOHN DEERE 350D 350-466
Component
Diesel Engine
Fluid
CHEVRON 15W40 (--- GAL)

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0169971	---	---
Sample Date		Client Info		06 Jan 2024	---	---
Machine Age	hrs	Client Info		1011	---	---
Oil Age	hrs	Client Info		1	---	---
Filter Age	hrs	Client Info		1	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>45	14	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	4	---	---
Lead	ppm	ASTM D5185m	>26	3	---	---
Copper	ppm	ASTM D5185m	>26	15	---	---
Tin	ppm	ASTM D5185m	>4	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION








Sodium and/or potassium levels are high.

Silicon	ppm	ASTM D5185m	>22	10	---	---
Potassium	ppm	ASTM D5185m	>20	8	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.2	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.5	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.5	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>50	▲ 228	---	---
Boron	ppm	ASTM D5185m		212	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		128	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		627	---	---
Calcium	ppm	ASTM D5185m		1259	---	---
Phosphorus	ppm	ASTM D5185m		707	---	---
Zinc	ppm	ASTM D5185m		802	---	---
Sulfur	ppm	ASTM D5185m		2407	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		17.5	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.8	---	---

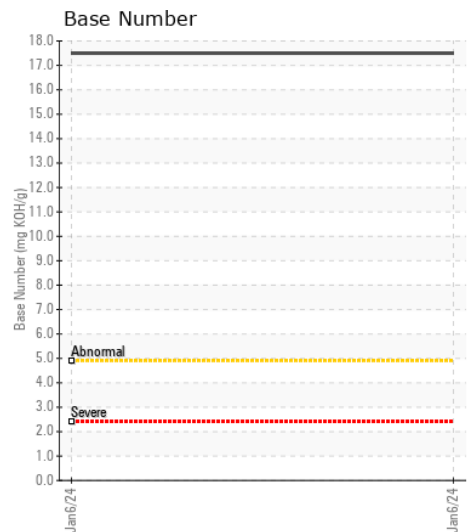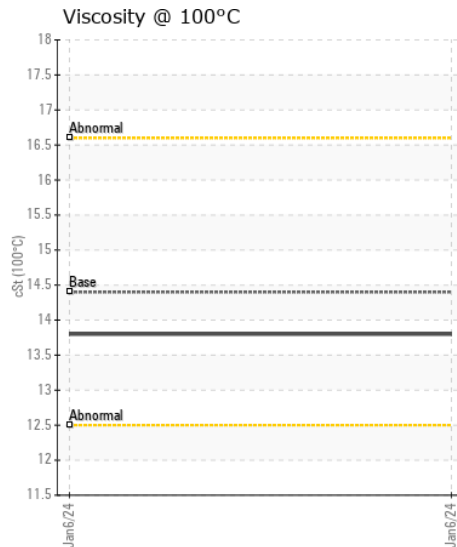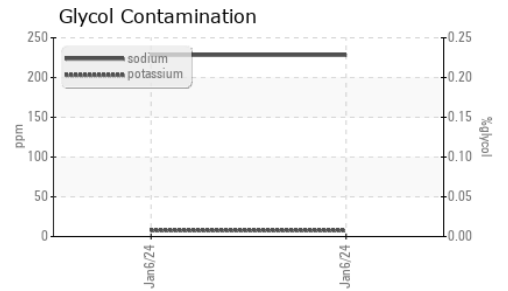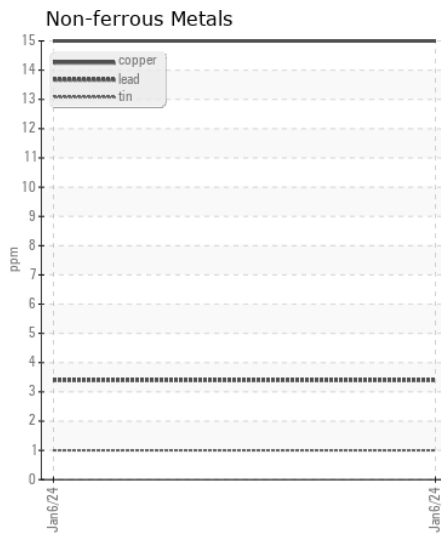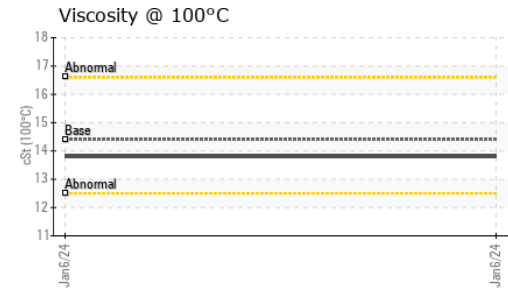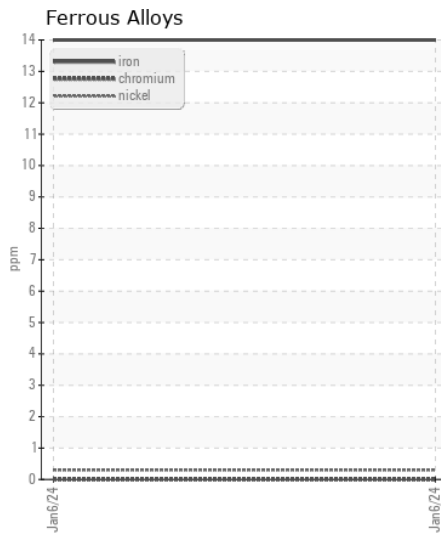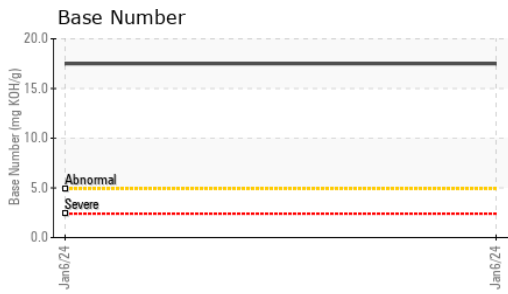

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0169971 **Received** : 16 Jan 2024
Lab Number : 06060867 **Diagnosed** : 17 Jan 2024
Unique Number : 10832249 **Diagnostician** : Jonathan Hester
Test Package : CONST (Additional Tests: Glycol, TBN)

PERRY ENGINEERING CO
 1945 MILLWOOD AVE
 WINCHESTER, VA
 US 22602
 Contact: T SHILEY
 tshiley@perryeng.com
 T: (540)974-3100
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)