



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
813634
 Component
Diesel Engine
 Fluid
MOBIL DELVAC EXTREME 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0008088	RPL0008064	---
Sample Date		Client Info		28 Nov 2023	23 Aug 2023	---
Machine Age	hrs	Client Info		1369	17944	---
Oil Age	hrs	Client Info		692	17944	---
Filter Age	hrs	Client Info		692	17944	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	25	62	---
Chromium	ppm	ASTM D5185m	>20	<1	2	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	<1	<1	---
Aluminum	ppm	ASTM D5185m	>20	16	35	---
Lead	ppm	ASTM D5185m	>40	2	3	---
Copper	ppm	ASTM D5185m	>330	6	27	---
Tin	ppm	ASTM D5185m	>15	2	3	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	39	---
Potassium	ppm	ASTM D5185m	>20	55	133	---
Fuel		WC Method	>5	<1.0	0.6	---
Water		WC Method	>0.2	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	8.5	9.5	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.3	19.5	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<1	7	---
Boron	ppm	ASTM D5185m		7	38	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		59	17	---
Manganese	ppm	ASTM D5185m		2	7	---
Magnesium	ppm	ASTM D5185m		961	719	---
Calcium	ppm	ASTM D5185m		1063	1232	---
Phosphorus	ppm	ASTM D5185m		1044	689	---
Zinc	ppm	ASTM D5185m		1241	801	---
Sulfur	ppm	ASTM D5185m		2979	2540	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.0	15.4	---
Base Number (BN)	mg KOH/g	ASTM D2896	10.3	8.2	6.5	---
Visc @ 100°C	cSt	ASTM D445	14.3	12.8	▲ 11.6	---

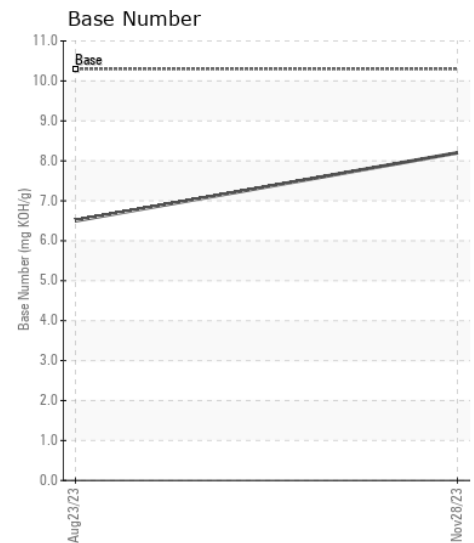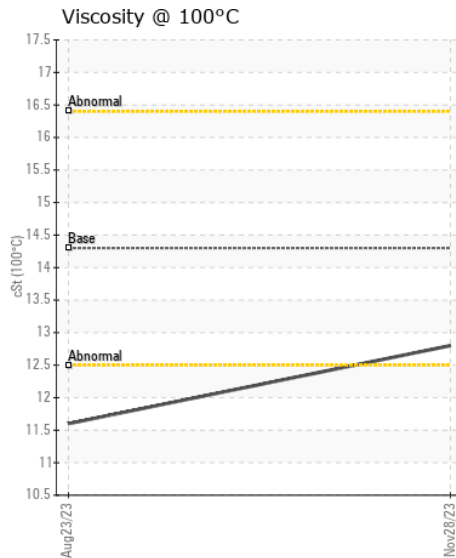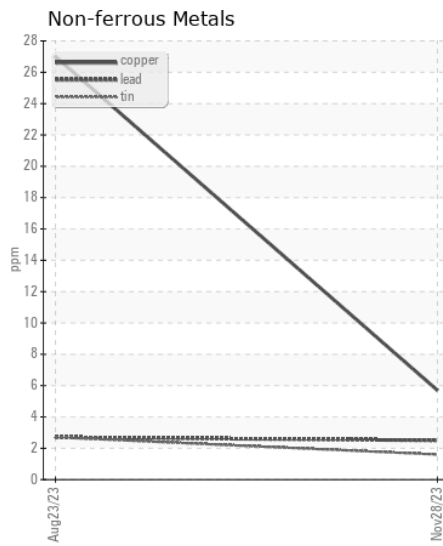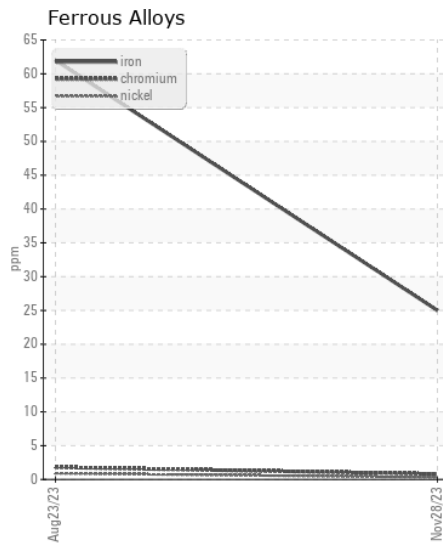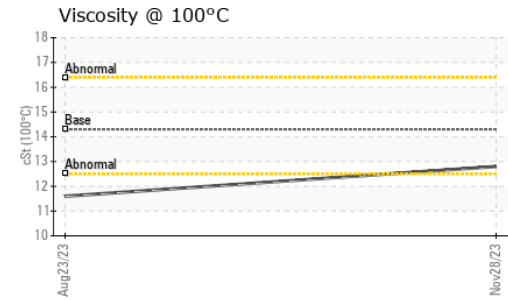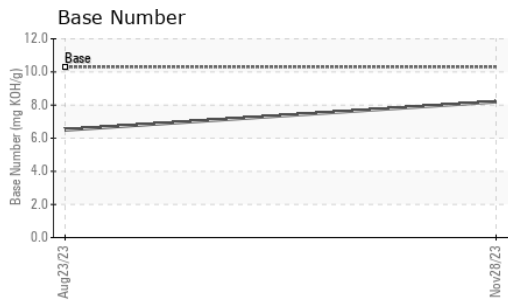

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0008088 **Received** : 16 Jan 2024
Lab Number : 06060892 **Diagnosed** : 17 Jan 2024
Unique Number : 10832274 **Diagnostician** : Wes Davis
Test Package : FLEET

RTL PACLEASE - 7017 - Oklahoma City
 8700 West I-40
 Oklahoma City, OK
 US 73128
 Contact: TECHNICIAN ACCOUNT
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: