



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**139520**  
Component  
**Diesel Engine**  
Fluid  
**MOBIL 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

## WEAR

All component wear rates are normal.

## CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

## FLUID CONDITION







The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>RPL0008099</b>	RPL0008030	RPL0007385
Sample Date		Client Info		<b>08 Jan 2024</b>	03 Mar 2023	10 Nov 2022
Machine Age	hrs	Client Info		<b>6300</b>	84948	1008
Oil Age	hrs	Client Info		<b>986</b>	49320	1008
Filter Age	hrs	Client Info		<b>986</b>	49320	1008
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

Iron	ppm	ASTM D5185m	>100	<b>16</b>	52	61
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	3	2
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>20	<b>11</b>	69	65
Lead	ppm	ASTM D5185m	>40	<b>6</b>	9	13
Copper	ppm	ASTM D5185m	>330	<b>0</b>	6	37
Tin	ppm	ASTM D5185m	>15	<b>1</b>	3	6
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	11	▲ 39
Potassium	ppm	ASTM D5185m	>20	<b>26</b>	148	160
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	0.6
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.1</b>	10.3	11.8
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	24.6	25.1
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

Sodium	ppm	ASTM D5185m	>118	<b>&lt;1</b>	<1	5
Boron	ppm	ASTM D5185m		<b>4</b>	6	27
Barium	ppm	ASTM D5185m		<b>0</b>	0	4
Molybdenum	ppm	ASTM D5185m		<b>63</b>	56	19
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	2	6
Magnesium	ppm	ASTM D5185m		<b>976</b>	807	772
Calcium	ppm	ASTM D5185m		<b>1079</b>	1118	1456
Phosphorus	ppm	ASTM D5185m		<b>1072</b>	872	729
Zinc	ppm	ASTM D5185m		<b>1305</b>	1123	886
Sulfur	ppm	ASTM D5185m		<b>2973</b>	2977	3303
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.4</b>	20.6	21.6
Base Number (BN)	mg KOH/g	ASTM D2896		<b>7.4</b>	5.8	6.4
Visc @ 100°C	cSt	ASTM D445		<b>13.1</b>	12.8	▲ 11.8

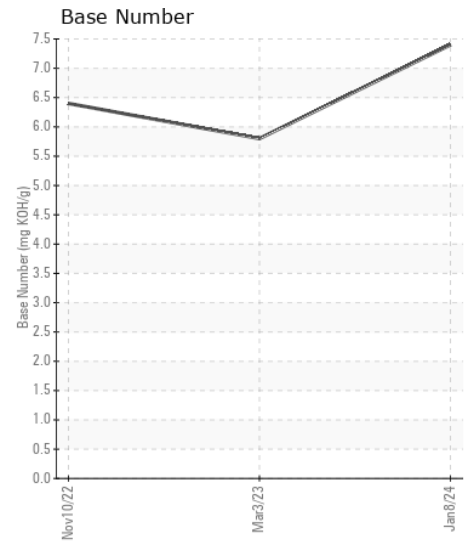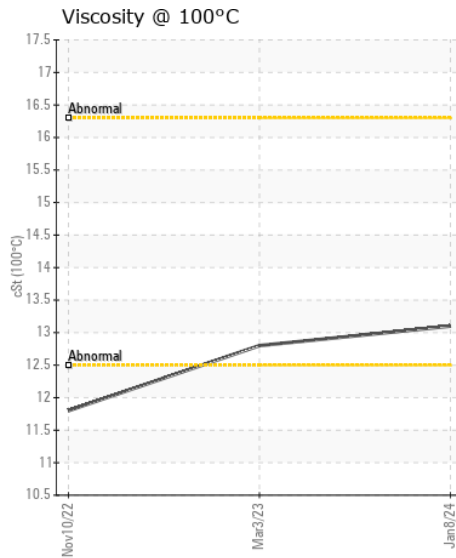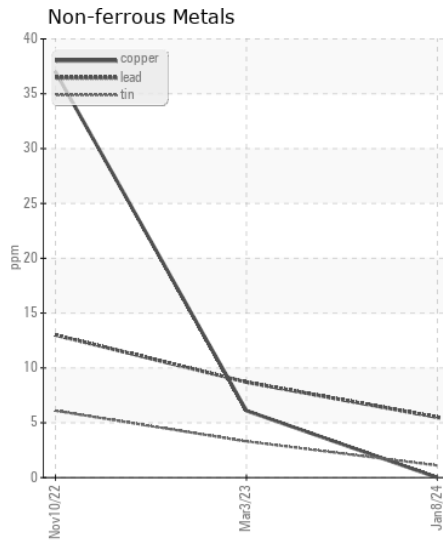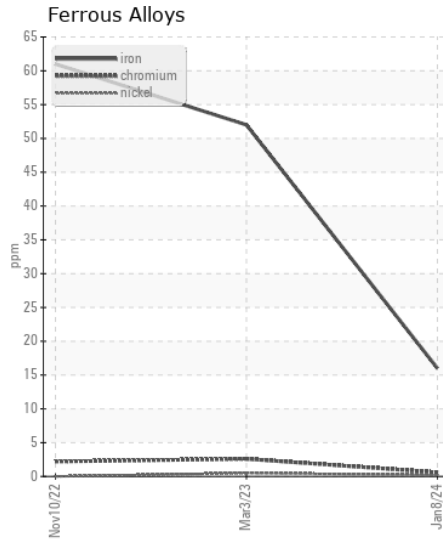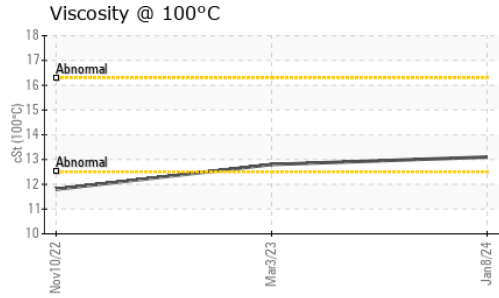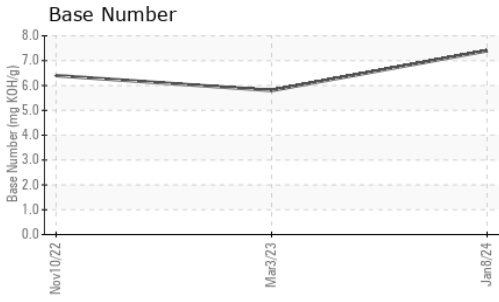

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : RPL0008099 **Received** : 16 Jan 2024  
**Lab Number** : 06060907 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832289 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**RTL PACLEASE - 7017 - Oklahoma City**  
 8700 West I-40  
 Oklahoma City, OK  
 US 73128  
 Contact: TECHNICIAN ACCOUNT  
 catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: