



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[9848]
Machine Id
VOLVO ECR145 315091
Component
Hydraulic System
Fluid
VOLVO SUPER HYDRAULIC OIL 46 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP437460	VCP427184	VCP406581
Sample Date		Client Info		10 Jan 2024	04 Aug 2023	10 Apr 2023
Machine Age	hrs	Client Info		2869	2365	1864
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>25	3	2	1
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	0	<1	0
Lead	ppm	ASTM D5185m	>20	0	0	0
Copper	ppm	ASTM D5185m	>150	16	15	22
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>50	6	5	7
Potassium	ppm	ASTM D5185m	>20	0	0	1
Water		WC Method	>0.1	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>40000	20335	2763	928
Particles >6µm		ASTM D7647	>10000	7323	361	316
Particles >14µm		ASTM D7647	>2500	1044	13	46
Particles >21µm		ASTM D7647	>640	346	3	12
Particles >38µm		ASTM D7647	>160	19	0	0
Particles >71µm		ASTM D7647	>40	1	0	0
Oil Cleanliness		ISO 4406 (c)	>22/20/18	22/20/17	19/16/11	17/15/13
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	1	1
Boron	ppm	ASTM D5185m	14	0	0	0
Barium	ppm	ASTM D5185m	0.0	0	0	0
Molybdenum	ppm	ASTM D5185m	0.0	0	0	0
Manganese	ppm	ASTM D5185m	0.0	0	0	<1
Magnesium	ppm	ASTM D5185m	2.6	0	1	2
Calcium	ppm	ASTM D5185m	49	50	64	62
Phosphorus	ppm	ASTM D5185m	354	355	396	390
Zinc	ppm	ASTM D5185m	419	431	467	466
Sulfur	ppm	ASTM D5185m	3719	1566	2013	837
Acid Number (AN)	mg KOH/g	ASTM D8045		0.51	0.48	0.52
Visc @ 40°C	cSt	ASTM D445	46	42.1	42.1	42.5

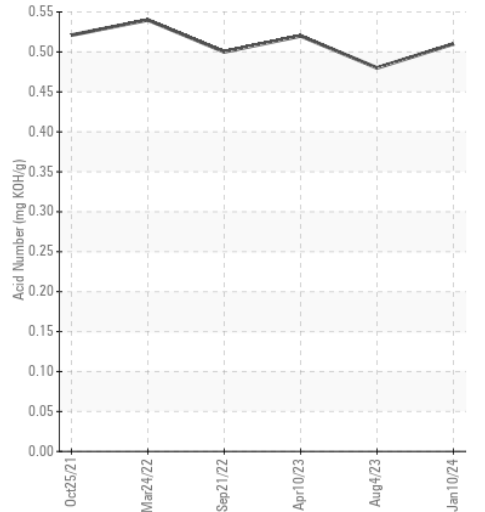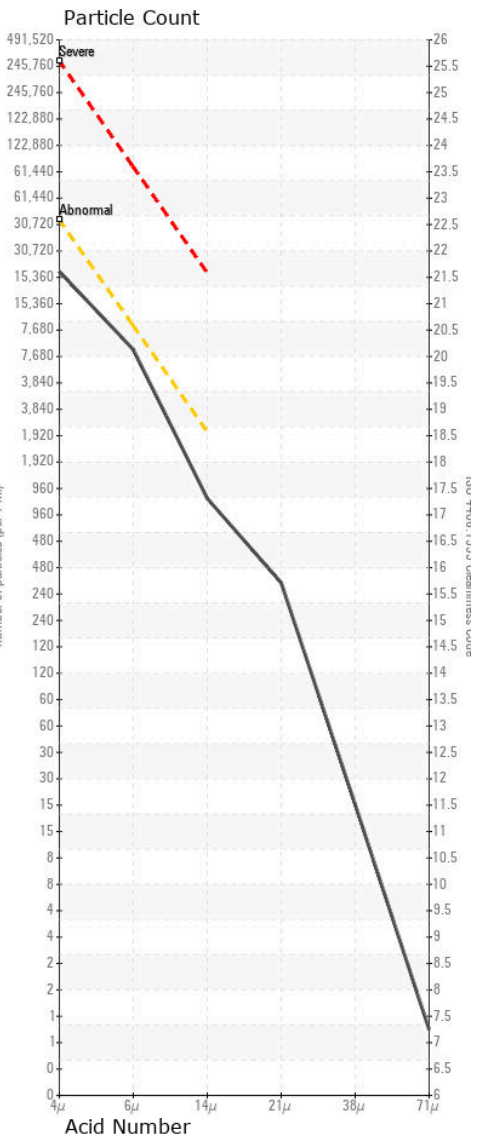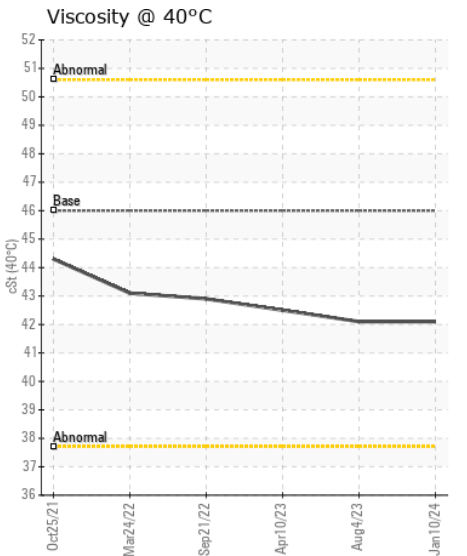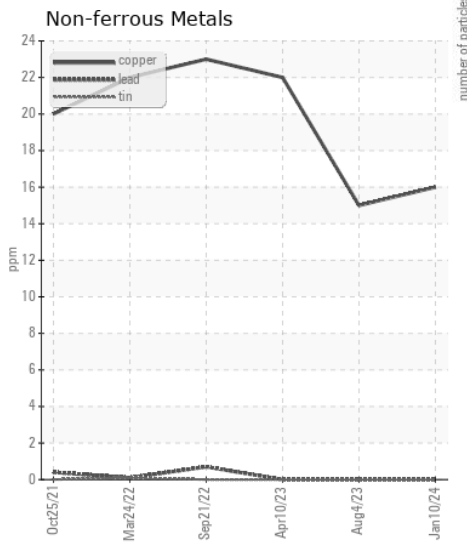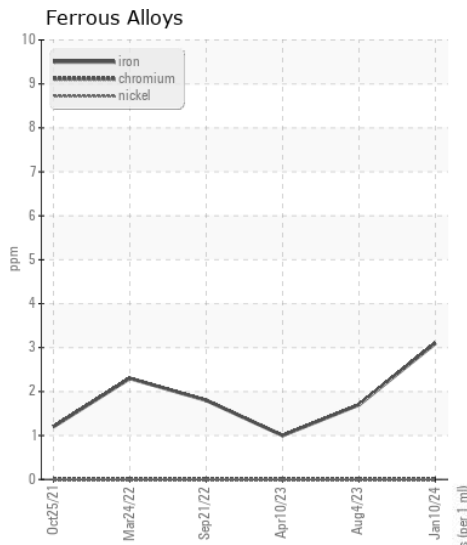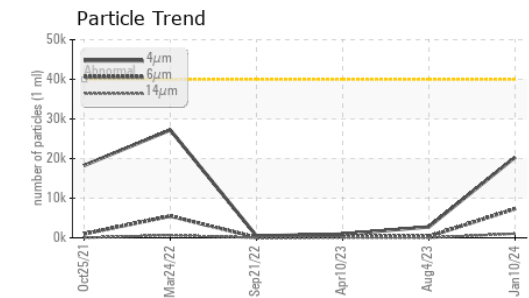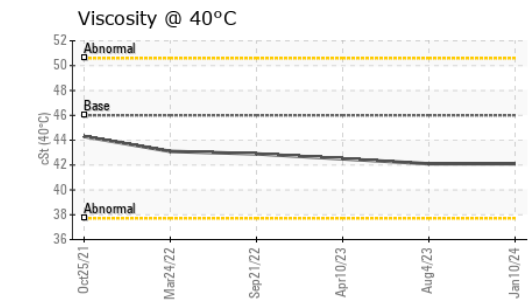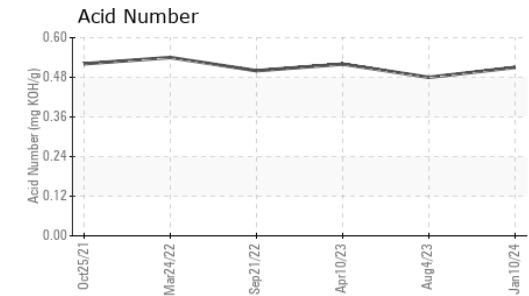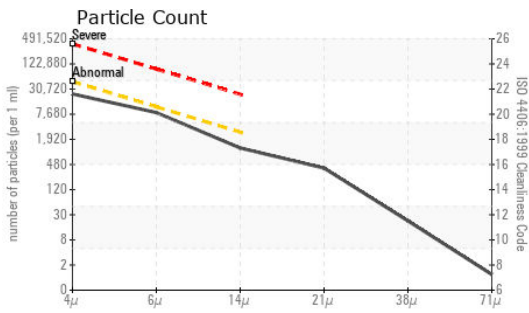

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP437460 **Received** : 16 Jan 2024
Lab Number : 06060978 **Diagnosed** : 17 Jan 2024
Unique Number : 10832360 **Diagnostician** : Jonathan Hester
Test Package : MOB 2

JON M HALL COMPANY
 1920 BOOTHE CIRCLE SUITE 110
 LONGWOOD, FL
 US 32750
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (407)215-0410

F: