



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**PCS - PORTABLE CRUSHING SERVICES**  
Machine Id  
**CASE 1121F LD10 - PCS**  
Component  
**Hydraulic System**  
Fluid  
**STP HYDRO ISO AW 46 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>KL0014097</b>	KL0013057	KL0009667
Sample Date		Client Info		<b>09 Jan 2024</b>	03 Oct 2023	29 Jun 2023
Machine Age	hrs	Client Info		<b>4723</b>	4268	3761
Oil Age	hrs	Client Info		<b>3515</b>	3060	2553
Filter Age	hrs	Client Info		<b>3515</b>	3060	2553
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ATTENTION

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>65	<b>32</b>	22	19
Chromium	ppm	ASTM D5185m	>6	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185m	>45	<b>2</b>	2	<1
Copper	ppm	ASTM D5185m	>120	<b>27</b>	23	21
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION










The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>25	<b>6</b>	5	5
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Particles >4µm		ASTM D7647		<b>15024</b>	5722	10618
Particles >6µm		ASTM D7647	>1300	<b>1247</b>	905	▲ 1414
Particles >14µm		ASTM D7647	>160	<b>85</b>	115	135
Particles >21µm		ASTM D7647	>40	<b>20</b>	37	39
Particles >38µm		ASTM D7647	>10	<b>1</b>	1	1
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>17/14	<b>17/14</b>	17/14	▲ 18/14
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	<1	1
Boron	ppm	ASTM D5185m		<b>10</b>	10	11
Barium	ppm	ASTM D5185m		<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m		<b>0</b>	8	8
Calcium	ppm	ASTM D5185m		<b>1149</b>	1137	1270
Phosphorus	ppm	ASTM D5185m		<b>516</b>	499	543
Zinc	ppm	ASTM D5185m		<b>477</b>	458	490
Sulfur	ppm	ASTM D5185m		<b>2340</b>	2228	2780
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.917</b>	---	0.66
Visc @ 40°C	cSt	ASTM D445		<b>51.8</b>	49.9	50.1

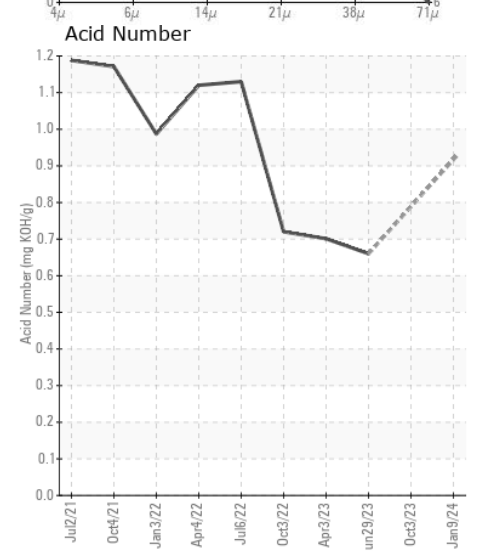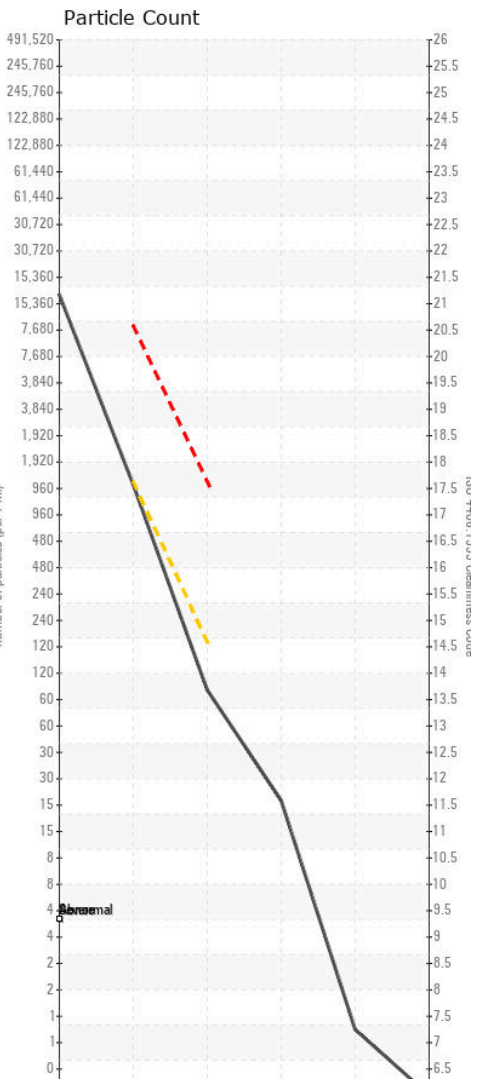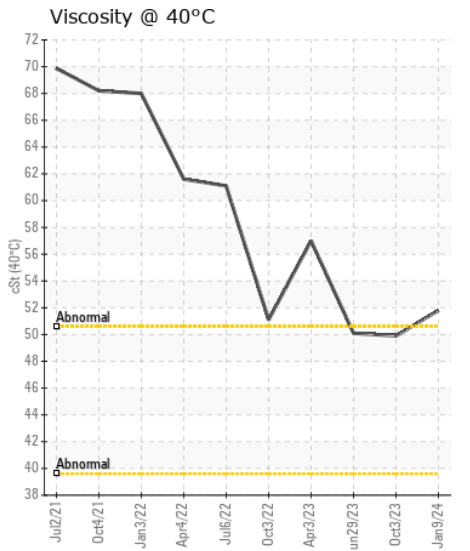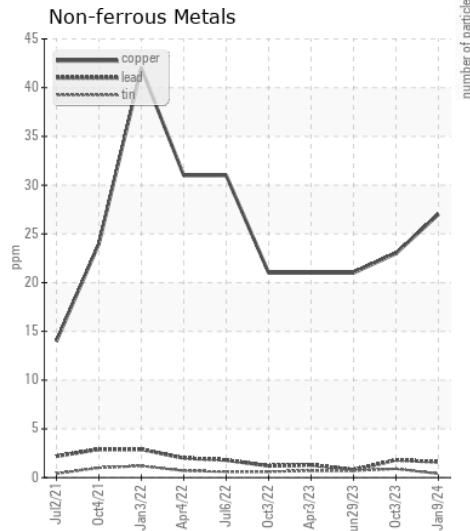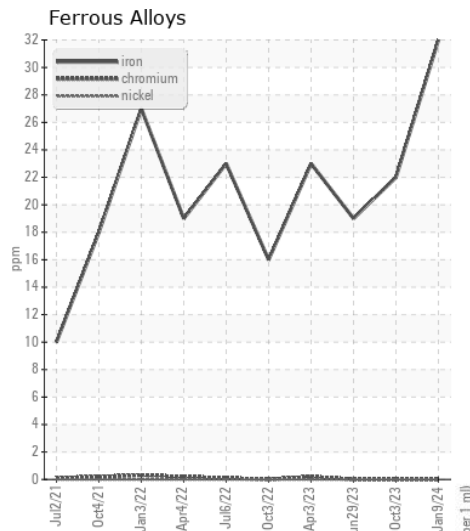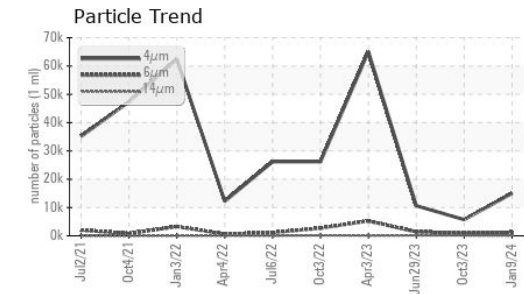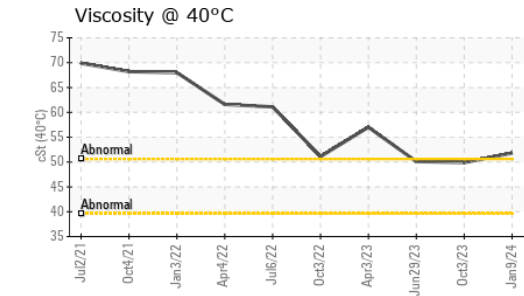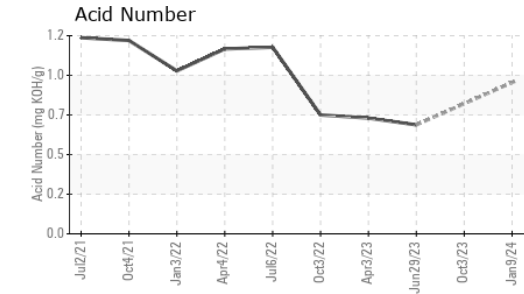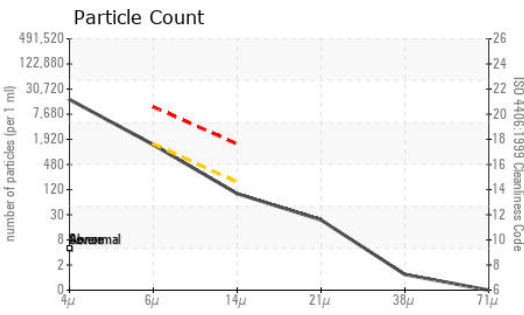

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KL0014097 **Received** : 16 Jan 2024  
**Lab Number** : 06060990 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10832372 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2

**PIKES PEAK PERFORMANCE PRODUCTS**  
 7888 BULLET RD  
 PEYTON, CO  
 US 80831  
 Contact: SCOTT RIGGS  
 rriggs.pikespeakperformance@gmail.com  
 T: (303)434-0126  
 F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)