



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
CATERPILLAR 730 WATER TRK 6019 (S/N B1M03182)
Component
Front Left Final Drive
Fluid
TULCO LUBSOIL TO-4 50 (1 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TO10003066	TO10002328	TO10001408
Sample Date		Client Info		08 Jan 2024	26 Jun 2023	28 Jul 2022
Machine Age	hrs	Client Info		11612	11087	10412
Oil Age	hrs	Client Info		3708	3183	488
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		None	None	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>500	142	79	37
Iron	ppm	ASTM D5185m	>800	68	60	25
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m	>15	<1	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	<1
Aluminum	ppm	ASTM D5185m	>75	3	3	3
Lead	ppm	ASTM D5185m	>10	0	0	<1
Copper	ppm	ASTM D5185m	>75	4	2	<1
Tin	ppm	ASTM D5185m	>8	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	LIGHT	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>400	63	60	50
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	4	5
Boron	ppm	ASTM D5185m		0	0	1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		2	1	<1
Magnesium	ppm	ASTM D5185m		15	15	14
Calcium	ppm	ASTM D5185m		3678	4053	3850
Phosphorus	ppm	ASTM D5185m		877	907	861
Zinc	ppm	ASTM D5185m		1082	1126	1073
Sulfur	ppm	ASTM D5185m		4713	6047	5006
Acid Number (AN)	mg KOH/g	ASTM D8045		1.09	1.04	1.10
Visc @ 40°C	cSt	ASTM D445		211	211	211
Visc @ 100°C	cSt	ASTM D445		18.1	18.1	18.2
Viscosity Index (VI)	Scale	ASTM D2270		93	93	94

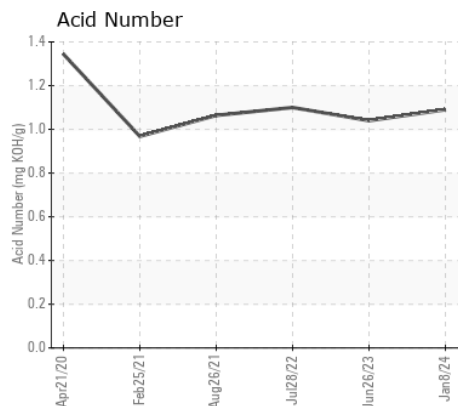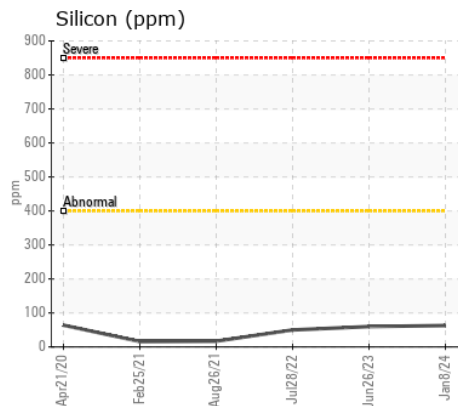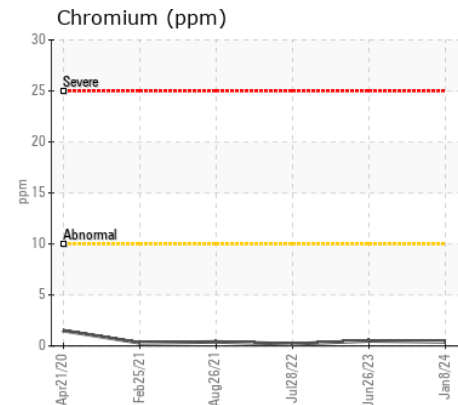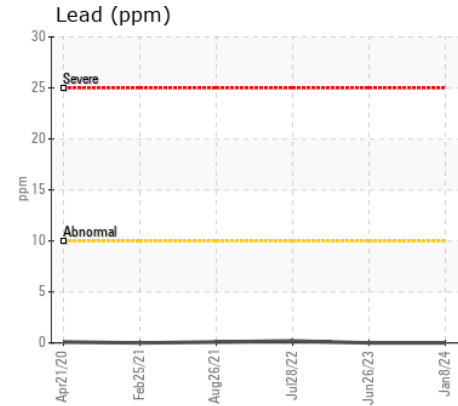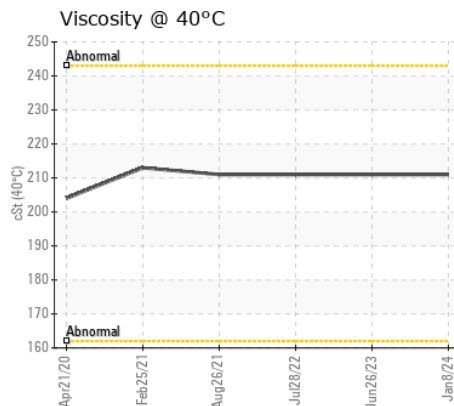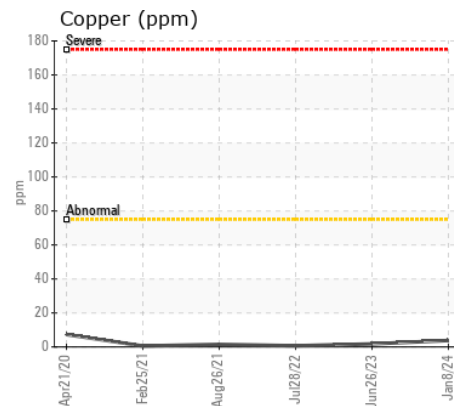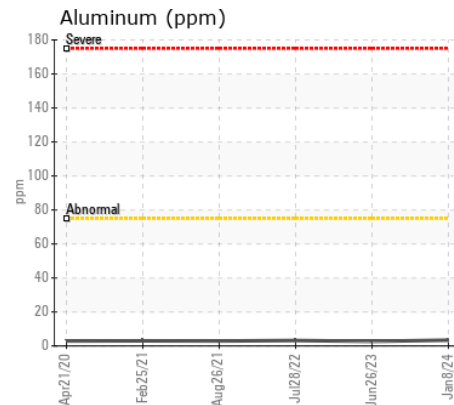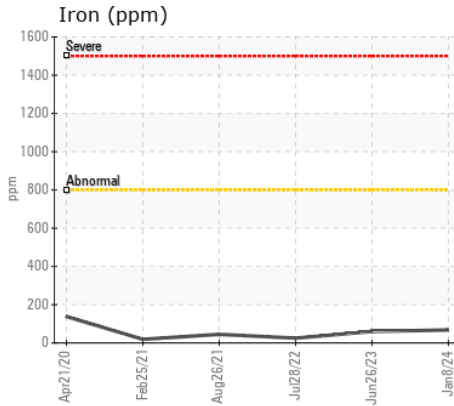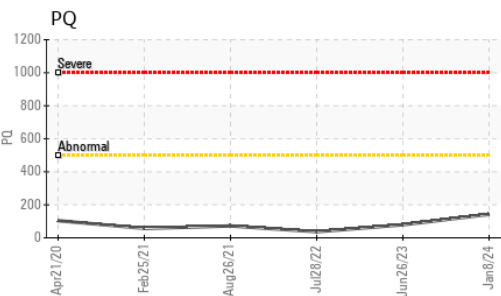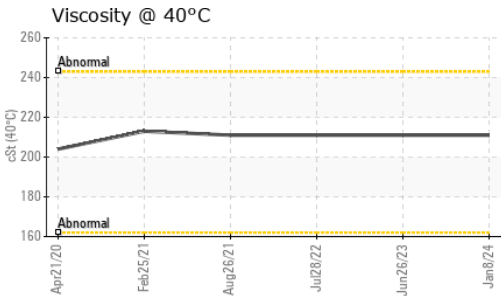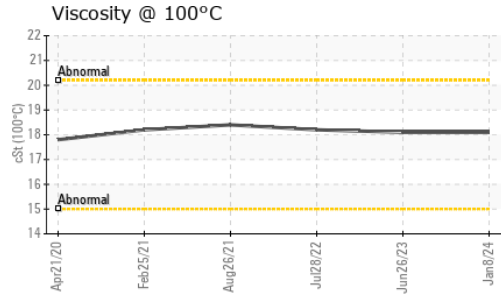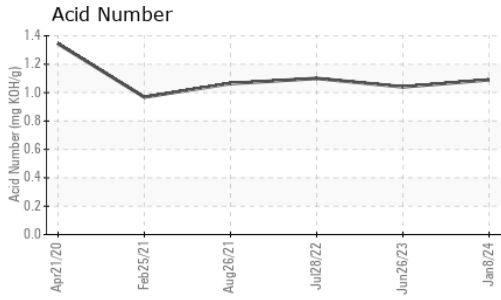

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TO10003066 **Received** : 16 Jan 2024
Lab Number : 06061338 **Diagnosed** : 18 Jan 2024
Unique Number : 10832720 **Diagnostician** : Jonathan Hester
Test Package : MOB 2 (Additional Tests: KV100, PQ, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

ANCHOR STONE TULSA ROCK
TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE
TULSA, OK
US 74137

Contact: MIKE SNYDER
msnyder@anchorstoneco.com

T: (417)850-9635

F: