



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**CATERPILLAR 730 WATER TRK 6019 (S/N B1M03182)**  
Component  
**Rear Differential**  
Fluid  
**TULCO LUBSOIL TO-4 50 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>TO10003062</b>	TO10002384	TO10001403
Sample Date		Client Info		<b>08 Jan 2024</b>	26 Jun 2023	28 Jul 2022
Machine Age	hrs	Client Info		<b>11612</b>	11087	10412
Oil Age	hrs	Client Info		<b>3708</b>	3183	488
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>None</b>	None	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>30</b>	31	25
Iron	ppm	ASTM D5185m	>500	<b>24</b>	23	19
Chromium	ppm	ASTM D5185m	>3	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>30	<b>4</b>	3	4
Lead	ppm	ASTM D5185m	>13	<b>0</b>	0	<1
Copper	ppm	ASTM D5185m	>103	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>5	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION













There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>100	<b>63</b>	57	53
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	0
Water		WC Method	>.2	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>4</b>	7	8
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m		<b>20</b>	20	17
Calcium	ppm	ASTM D5185m		<b>4458</b>	4844	4373
Phosphorus	ppm	ASTM D5185m		<b>896</b>	917	833
Zinc	ppm	ASTM D5185m		<b>1077</b>	1113	1013
Sulfur	ppm	ASTM D5185m		<b>5009</b>	6353	5031
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.11</b>	1.00	1.10
Visc @ 40°C	cSt	ASTM D445		<b>212</b>	212	210
Visc @ 100°C	cSt	ASTM D445		<b>18.1</b>	18.1	18.3
Viscosity Index (VI)	Scale	ASTM D2270		<b>93</b>	93	95

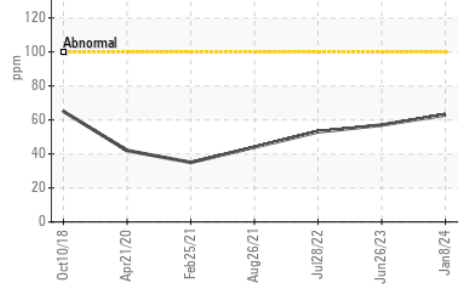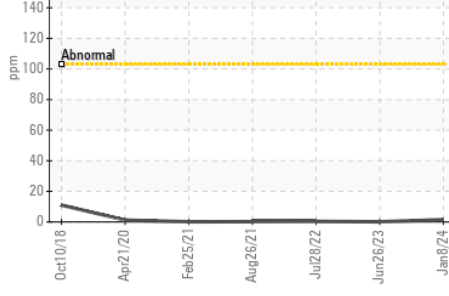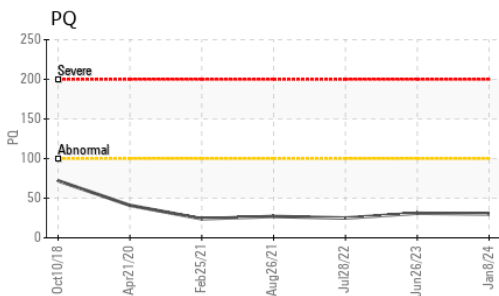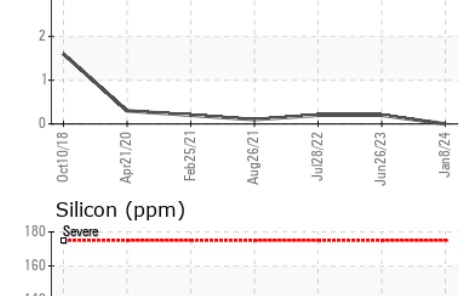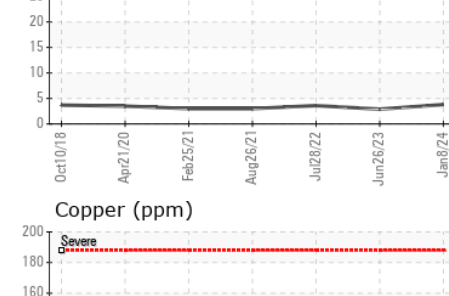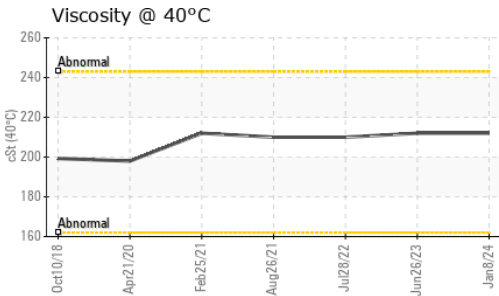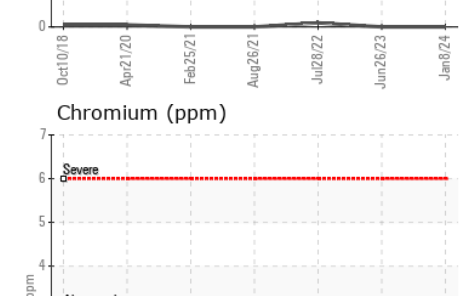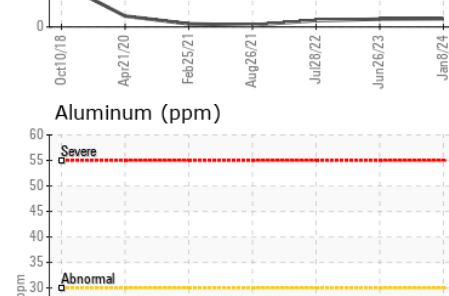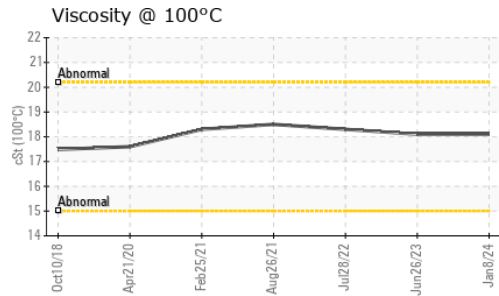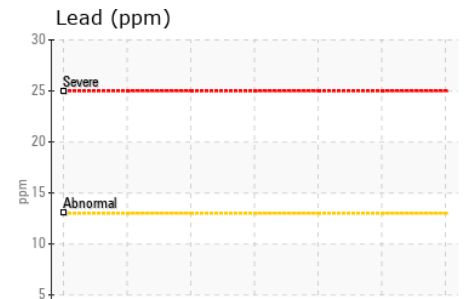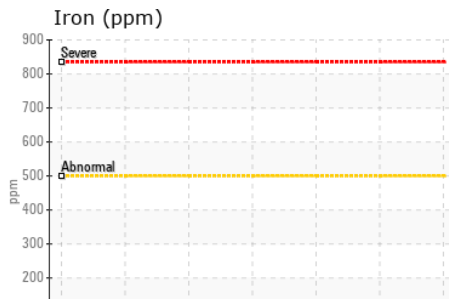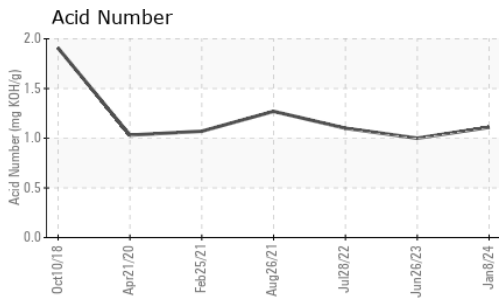

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : TO10003062 **Received** : 16 Jan 2024  
**Lab Number** : 06061349 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10832731 **Diagnostician** : Wes Davis  
**Test Package** : MOB 2 ( Additional Tests: KV100, PQ, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**ANCHOR STONE TULSA ROCK**  
TULSA ROCK QUARRY, 66TH ST N 145TH AVENUE  
TULSA, OK  
US 74137  
Contact: MIKE SNYDER  
msnyder@anchorstoneco.com  
T: (417)850-9635  
F: