



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>ABNORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**[05W44265]**

Machine Id

**000696**

Component

**Pump Drive**

Fluid

**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)**

### RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0199189</b>	JR0187695	---
Sample Date		Client Info		<b>12 Jan 2024</b>	19 Sep 2023	---
Machine Age	hrs	Client Info		<b>966</b>	482	---
Oil Age	hrs	Client Info		<b>966</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>16</b>	21	---
Iron	ppm	ASTM D5185m	>500	<b>56</b>	48	---
Chromium	ppm	ASTM D5185m	>15	<b>2</b>	2	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	3	---
Lead	ppm	ASTM D5185m		<b>0</b>	0	---
Copper	ppm	ASTM D5185m	>35	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION








Elemental level of silicon (Si) above normal indicating ingress of seal material.

Silicon	ppm	ASTM D5185m	>75	<b>▲ 95</b>	▲ 98	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	0.2%	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185m		<b>53</b>	62	---
Barium	ppm	ASTM D5185m		<b>5</b>	4	---
Molybdenum	ppm	ASTM D5185m		<b>104</b>	117	---
Manganese	ppm	ASTM D5185m		<b>4</b>	4	---
Magnesium	ppm	ASTM D5185m		<b>16</b>	13	---
Calcium	ppm	ASTM D5185m		<b>4023</b>	4394	---
Phosphorus	ppm	ASTM D5185m		<b>1173</b>	1190	---
Zinc	ppm	ASTM D5185m		<b>1324</b>	1387	---
Sulfur	ppm	ASTM D5185m		<b>7135</b>	8867	---
Visc @ 40°C	cSt	ASTM D445	117	<b>65.6</b>	67.3	---

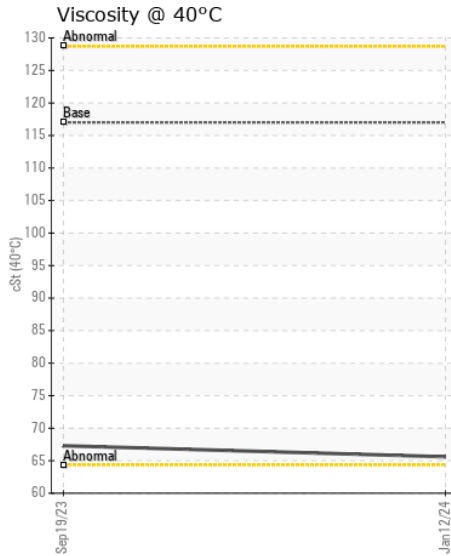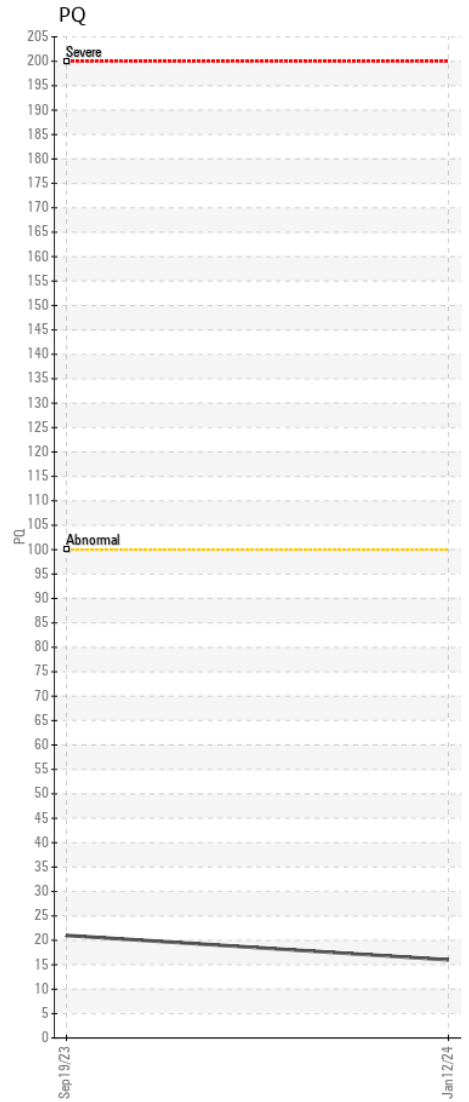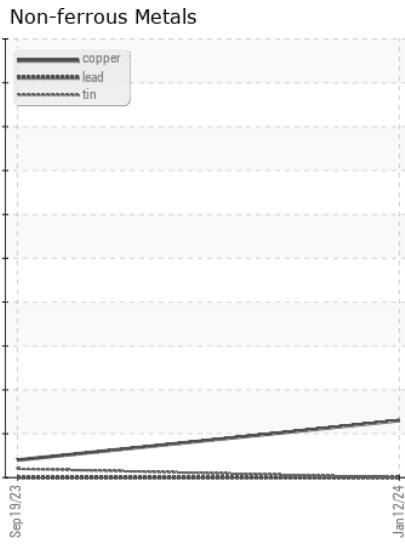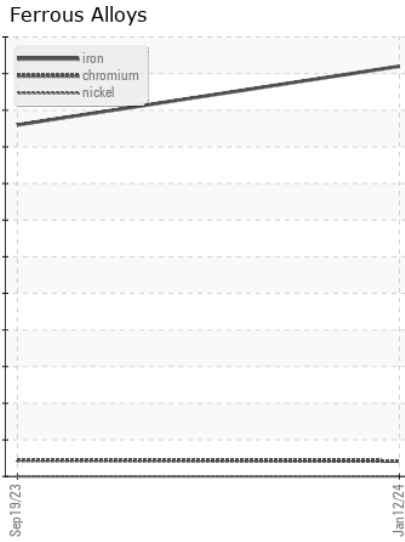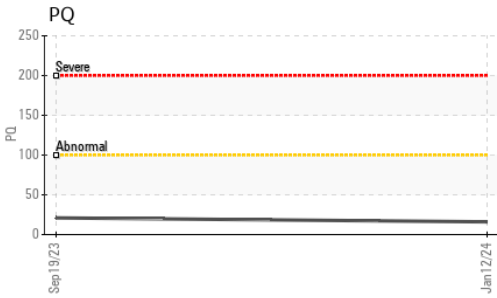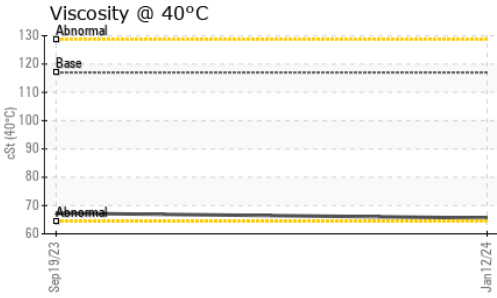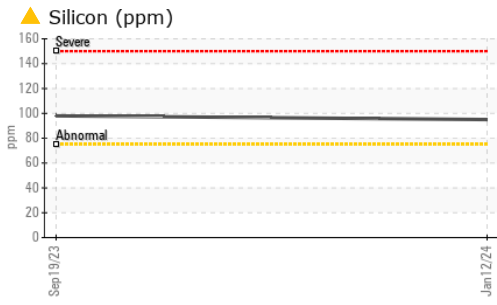

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0199189 **Recieved** : 16 Jan 2024  
**Lab Number** : 06061441 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832823 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**B & S SITE DEVLOPMENT**  
 7800 PINEY BRANCH LANE  
 BRISTOW, VA  
 US 20136

Contact: DANNY HUFF  
 dhuff@bandssite.com

T: (540)270-3203

F: (703)753-0605