



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	ATTENTION



Machine Id
VOLVO A45G 352950
Component
Drop Box
Fluid
VOLVO PREMIUM GEAR OIL 80W-90 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP428860	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		3720	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ATTENTION	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	78	---	---
Chromium	ppm	ASTM D5185m	>20	2	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>30	<1	---	---
Lead	ppm	ASTM D5185m	>30	0	---	---
Copper	ppm	ASTM D5185m	>30	3	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	7	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

FLUID CONDITION

The oil viscosity is lower than normal. Confirm oil type.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	379	161	---	---
Barium	ppm	ASTM D5185m	0.0	0	---	---
Molybdenum	ppm	ASTM D5185m	0.8	5	---	---
Manganese	ppm	ASTM D5185m	0.0	2	---	---
Magnesium	ppm	ASTM D5185m	31	5	---	---
Calcium	ppm	ASTM D5185m	38	64	---	---
Phosphorus	ppm	ASTM D5185m	1077	848	---	---
Zinc	ppm	ASTM D5185m	46	30	---	---
Sulfur	ppm	ASTM D5185m	23526	13682	---	---
Visc @ 40°C	cSt	ASTM D445	139	▲ 84.8	---	---

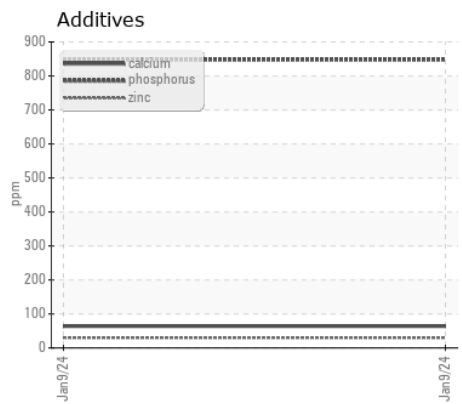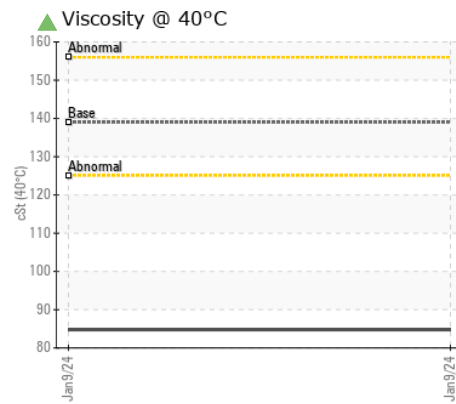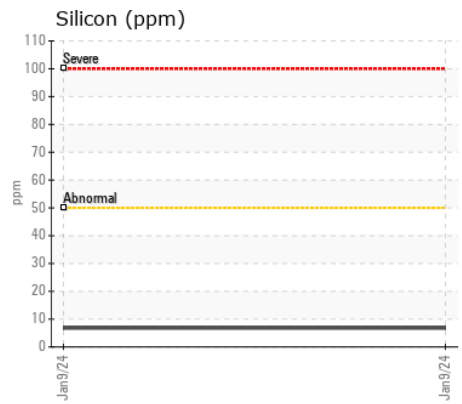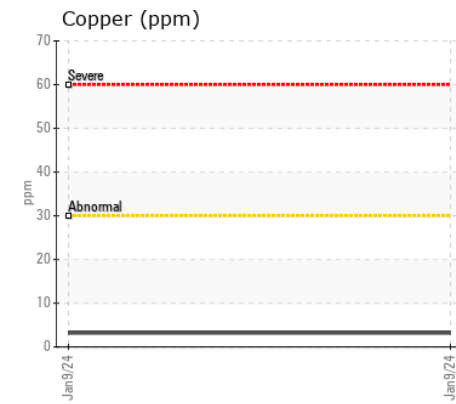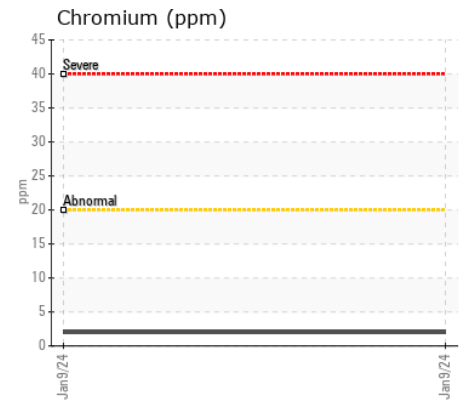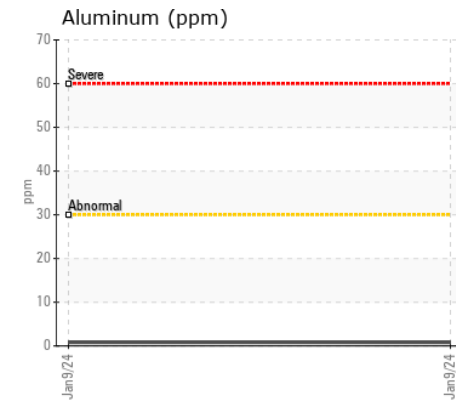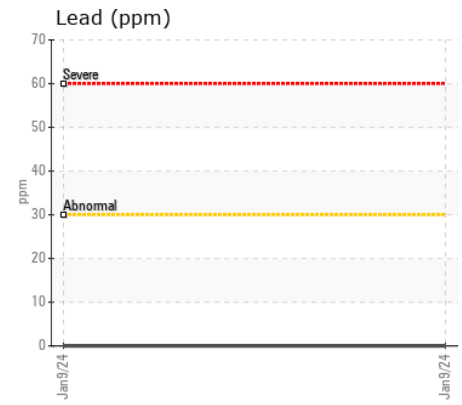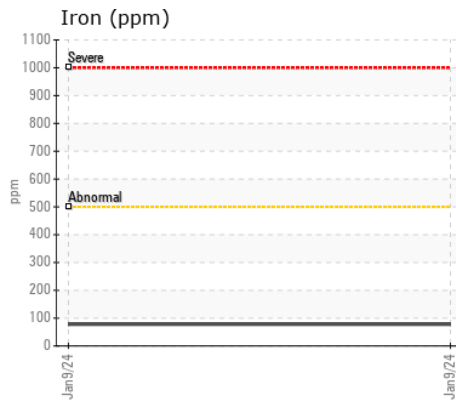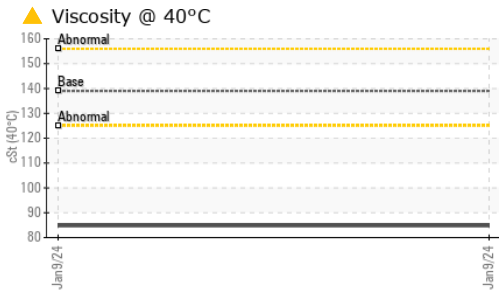

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP428860 **Received** : 16 Jan 2024
Lab Number : 06061514 **Diagnosed** : 17 Jan 2024
Unique Number : 10832896 **Diagnostician** : Don Baldridge
Test Package : MOB 1

ROMCO INC
 1350 NE LOOP 820
 FORT WORTH, TX
 US 76106
 Contact: GARY ENOCHS

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (800)227-6626

F: (817)626-8983