



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH40M 122207-1215
Component
Front Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0273221	LH0244668	---
Sample Date		Client Info		08 Jan 2024	17 May 2023	---
Machine Age	hrs	Client Info		3977	2962	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	Changed	---
Sample Status				NORMAL	NORMAL	---
Iron	ppm	ASTM D5185m	>150	2	2	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>5	2	0	---
Lead	ppm	ASTM D5185m	>5	0	0	---
Copper	ppm	ASTM D5185m	>125	10	8	---
Tin	ppm	ASTM D5185m	>5	<1	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>20	<1	<1	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185m	>170	0	2	---
Boron	ppm	ASTM D5185m	400	0	0	---
Barium	ppm	ASTM D5185m	200	0	0	---
Molybdenum	ppm	ASTM D5185m	12	<1	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m	12	0	<1	---
Calcium	ppm	ASTM D5185m	150	7	4	---
Phosphorus	ppm	ASTM D5185m	1650	2287	2440	---
Zinc	ppm	ASTM D5185m	125	0	0	---
Sulfur	ppm	ASTM D5185m	22500	27959	25056	---
Visc @ 40°C	cSt	ASTM D445	143	187	184	---

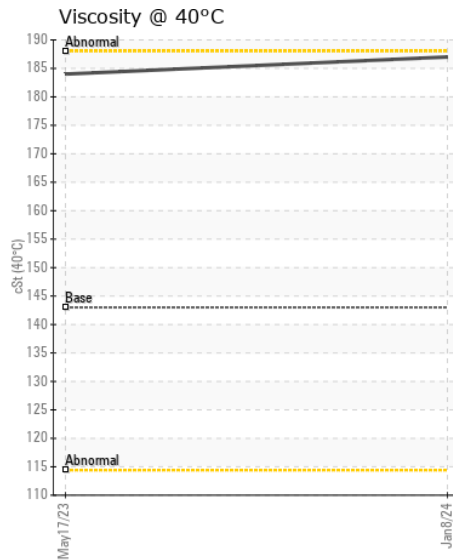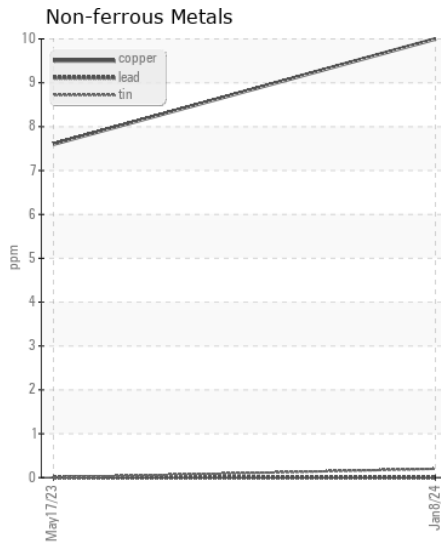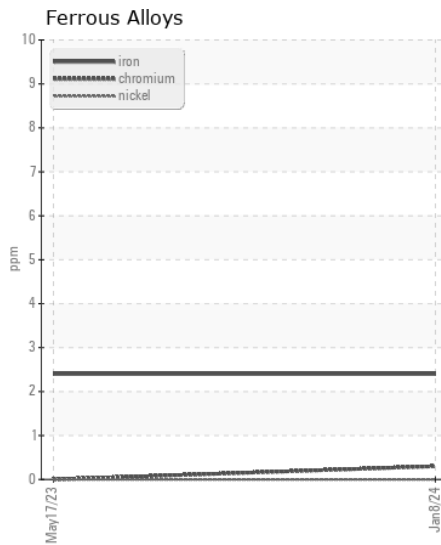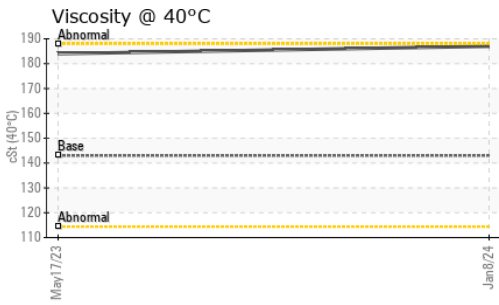

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0273221 **Received** : 16 Jan 2024
Lab Number : 06061546 **Diagnosed** : 17 Jan 2024
Unique Number : 10832928 **Diagnostician** : Wes Davis
Test Package : CONST

RECO EQUIPMENT INC.
 1040 REED DRIVE
 MONROE, OH
 US 45050
 Contact: Eric Hansen
 ehansen@recoequip.com
 T: (513)539-5255
 F: (513)539-5256

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)