



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
120556-1216 LIEBHERR LH50M 120556-1216
 Component
Front Differential
 Fluid
GEAR OIL SAE 85W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0022518	DJJ0022527	DJJ0019869
Sample Date		Client Info		03 Jan 2024	11 Oct 2023	06 Jun 2023
Machine Age	hrs	Client Info		9096	8542	7782
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	N/A
Filter Changed		Client Info		Not Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	1	0	7
Chromium	ppm	ASTM D5185m	>2	<1	0	0
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m	>4	0	0	0
Aluminum	ppm	ASTM D5185m	>7	2	0	<1
Lead	ppm	ASTM D5185m	>4	0	<1	0
Copper	ppm	ASTM D5185m	>135	2	4	19
Tin	ppm	ASTM D5185m	>3	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	<1	<1	8
Potassium	ppm	ASTM D5185m	>20	1	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m	400	187	105	7
Barium	ppm	ASTM D5185m	200	0	0	6
Molybdenum	ppm	ASTM D5185m	12	0	0	<1
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m	12	0	0	11
Calcium	ppm	ASTM D5185m	150	8	30	2962
Phosphorus	ppm	ASTM D5185m	1650	1001	1518	1095
Zinc	ppm	ASTM D5185m	125	0	9	1313
Sulfur	ppm	ASTM D5185m	22500	19385	20138	10611
Visc @ 40°C	cSt	ASTM D445	180	135	149	▲ 57.3


Viscosity @ 40°C

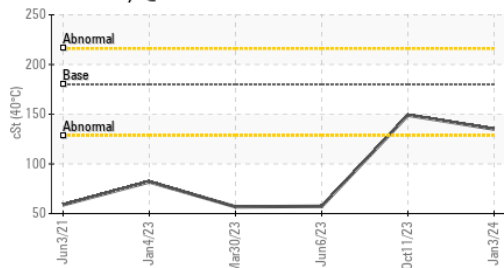


Ferrous Alloys

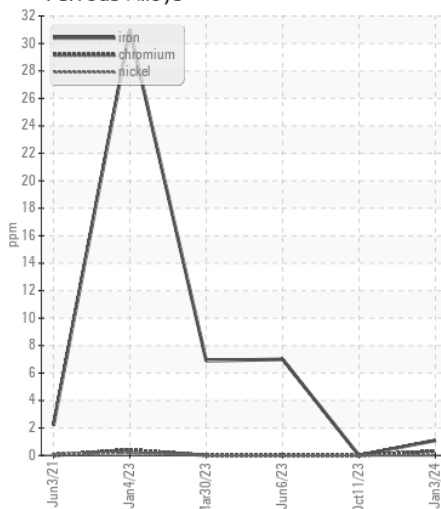

Non-ferrous Metals

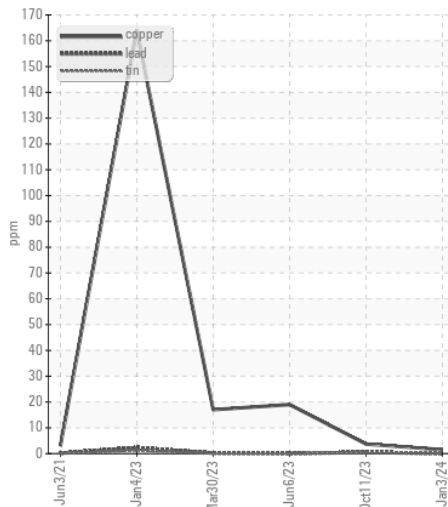

Viscosity @ 40°C

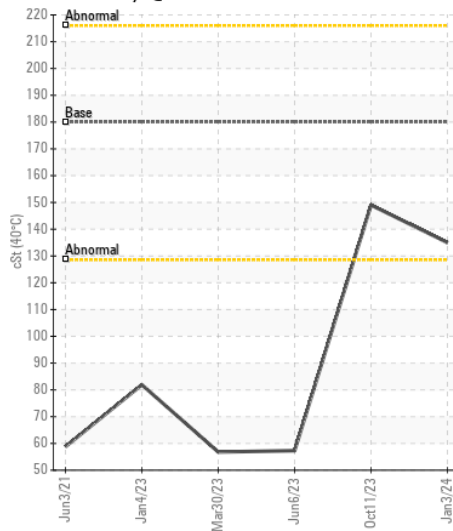

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0022518
Lab Number : 06061553
Unique Number : 10832935
Test Package : CONST

RIVER METALS RECYCLING - DECATUR FACILITY
 4301 IVERSON BLVD
 TRINITY, AL
 US 35673
 Contact: LARRY BARBER
 larry.barber@rmrecycling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: