



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
120556-1216 LIEBHERR LH50M 120556-1216
 Component
Splitter Box
 Fluid
GEAR OIL SAE 90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		DJJ0022500	DJJ0022520	DJJ0019876
Sample Date		Client Info		03 Jan 2024	11 Oct 2023	06 Jun 2023
Machine Age	hrs	Client Info		9096	8542	7786
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	16	21	50
Chromium	ppm	ASTM D5185m	>5	<1	0	<1
Nickel	ppm	ASTM D5185m	>5	0	0	0
Titanium	ppm	ASTM D5185m		<1	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	7
Lead	ppm	ASTM D5185m	>30	0	<1	0
Copper	ppm	ASTM D5185m	>20	1	0	<1
Tin	ppm	ASTM D5185m	>10	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	4	4	7
Potassium	ppm	ASTM D5185m	>20	2	1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	0	<1	1
Boron	ppm	ASTM D5185m	400	16	27	151
Barium	ppm	ASTM D5185m	200	0	0	0
Molybdenum	ppm	ASTM D5185m	12	<1	0	0
Manganese	ppm	ASTM D5185m		<1	1	<1
Magnesium	ppm	ASTM D5185m	12	1	2	7
Calcium	ppm	ASTM D5185m	150	15	23	65
Phosphorus	ppm	ASTM D5185m	1650	1886	1056	1342
Zinc	ppm	ASTM D5185m	125	0	18	29
Sulfur	ppm	ASTM D5185m	22500	29353	20520	23814
Visc @ 40°C	cSt	ASTM D445	183	178	175	142

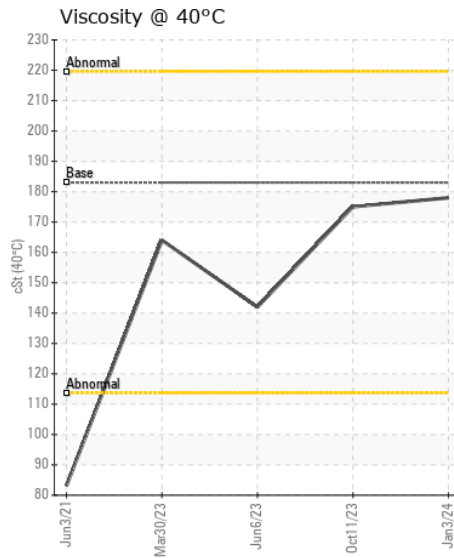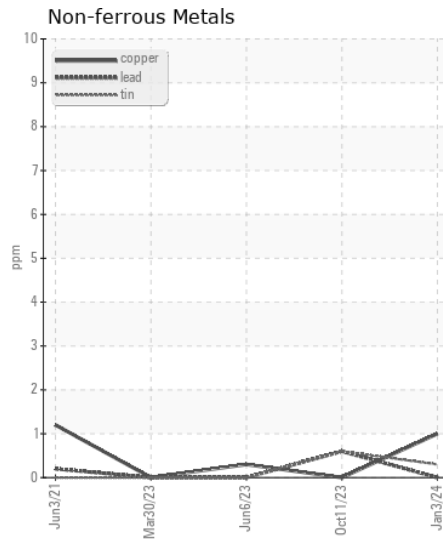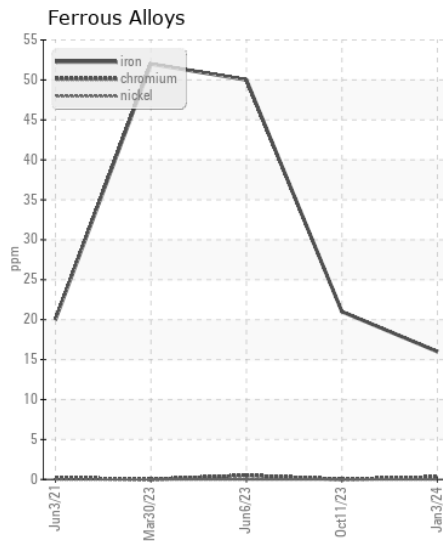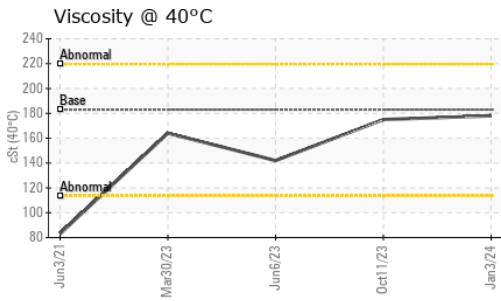

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : DJJ0022500 **Received** : 16 Jan 2024
Lab Number : 06061554 **Diagnosed** : 17 Jan 2024
Unique Number : 10832936 **Diagnostician** : Don Baldrige
Test Package : CONST

RIVER METALS RECYCLING - DECATUR FACILITY
 4301 IVERSON BLVD
 TRINITY, AL
 US 35673
 Contact: LARRY BARBER
 larry.barber@rmrecycling.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: