



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO L90H 624938**

Component  
**Transmission (Auto)**

Fluid  
**VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>ML0000489</b>	---	---
Sample Date		Client Info		<b>09 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>5292</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	<b>48</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>2</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>0</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>8</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

**CONTAMINATION**





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>0</b>	---	---
Boron	ppm	ASTM D5185m	187	<b>70</b>	---	---
Barium	ppm	ASTM D5185m	0.0	<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m	0.0	<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m	0.0	<b>1</b>	---	---
Magnesium	ppm	ASTM D5185m	6.8	<b>0</b>	---	---
Calcium	ppm	ASTM D5185m	215	<b>79</b>	---	---
Phosphorus	ppm	ASTM D5185m	445	<b>223</b>	---	---
Zinc	ppm	ASTM D5185m	56	<b>0</b>	---	---
Sulfur	ppm	ASTM D5185m	1336	<b>1858</b>	---	---
Visc @ 40°C	cSt	ASTM D445	35.3	<b>27.5</b>	---	---

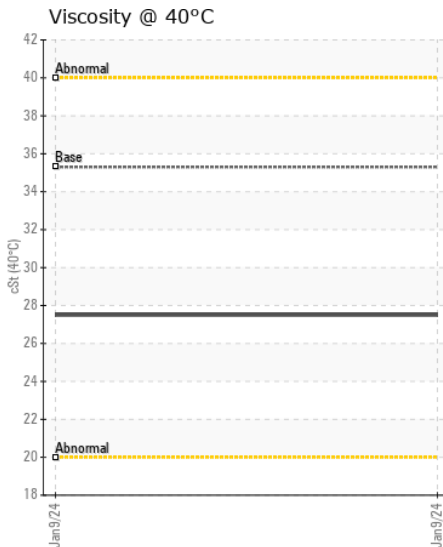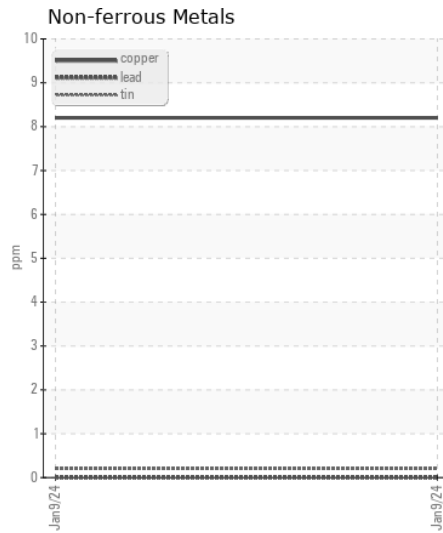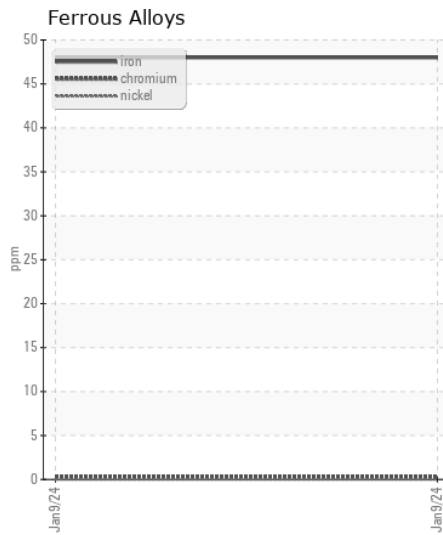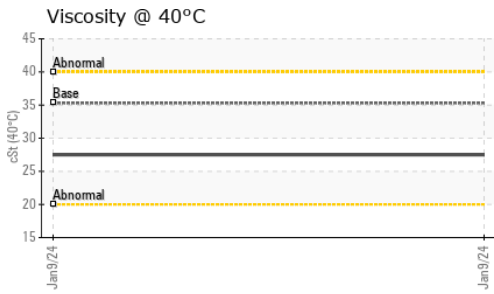

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0000489 **Received** : 16 Jan 2024  
**Lab Number** : 06061583 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10832965 **Diagnostician** : Don Baldrige  
**Test Package** : CONST

**MCCLUNG-LOGAN EQUIPMENT CO - RICHMOND**  
 1345 MOUNTAIN ROAD  
 GLEN ALLEN, VA  
 US 23060  
 Contact: KYLE RATLIFFE  
 KRATLIFFE@MCCLUNG-LOGAN.COM  
 T:  
 F: (804)266-1611

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)