



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	SEVERE
FLUID CONDITION	ABNORMAL

Machine Id
1396
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (--- QTS)

RECOMMENDATION

We advise that you check for possible coolant leak. Check for low coolant level. We advise that you check the fuel injection system. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0870670	WC0821414	WC0806642
Sample Date		Client Info		21 Dec 2023	13 Jun 2023	28 Apr 2023
Machine Age	mls	Client Info		214048	204123	200784
Oil Age	mls	Client Info		0	0	0
Filter Age	mls	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	Not Changd	Not Changd
Filter Changed		Client Info		Not Changd	Not Changd	Not Changd
Sample Status				SEVERE	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	29	32	23
Chromium	ppm	ASTM D5185m	>20	3	1	1
Nickel	ppm	ASTM D5185m	>4	0	<1	<1
Titanium	ppm	ASTM D5185m		0	<1	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	6	4	4
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	1	4	2
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION













Sodium and/or potassium levels are high. There is a high amount of fuel present in the oil.

Silicon	ppm	ASTM D5185m	>25	5	10	9
Potassium	ppm	ASTM D5185m	>20	106	2	2
Fuel	%	ASTM D3524	>5	8.3	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol	%	*ASTM D2982		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	1	0.8	0.6
Nitration	Abs/cm	*ASTM D7624	>20	11.1	11.5	10.5
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.4	21.2	19.7
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

Fuel is present in the oil and is lowering the viscosity. The BN result indicates that there is suitable alkalinity remaining in the oil.

Sodium	ppm	ASTM D5185m	>158	88	6	3
Boron	ppm	ASTM D5185m	250	27	27	36
Barium	ppm	ASTM D5185m	10	0	0	2
Molybdenum	ppm	ASTM D5185m	100	87	90	96
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	450	92	81	70
Calcium	ppm	ASTM D5185m	3000	1896	2346	2362
Phosphorus	ppm	ASTM D5185m	1150	920	1057	1114
Zinc	ppm	ASTM D5185m	1350	1083	1283	1327
Sulfur	ppm	ASTM D5185m	4250	3238	4314	4080
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.5	16.4	15.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	6.9	6.8	6.8
Visc @ 100°C	cSt	ASTM D445	14.4	11.8	13.9	13.8

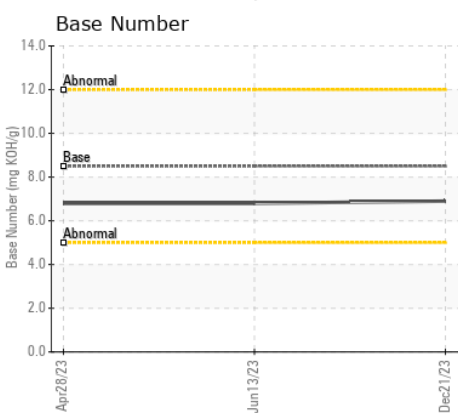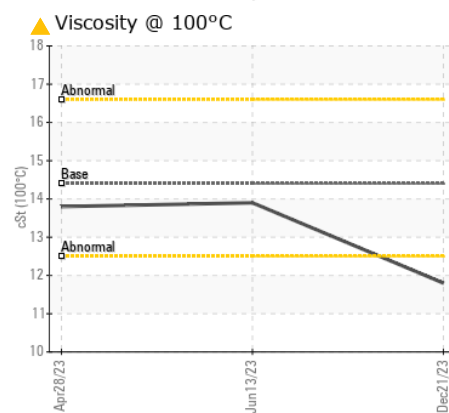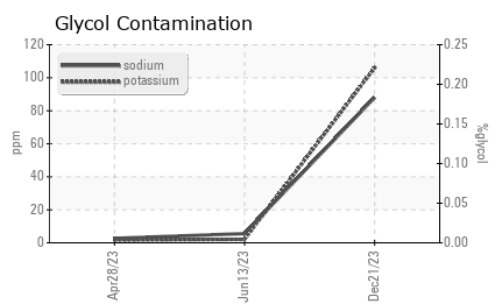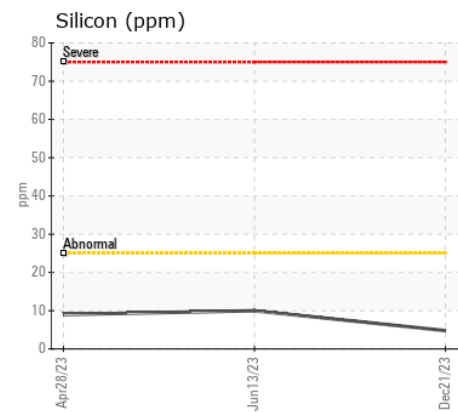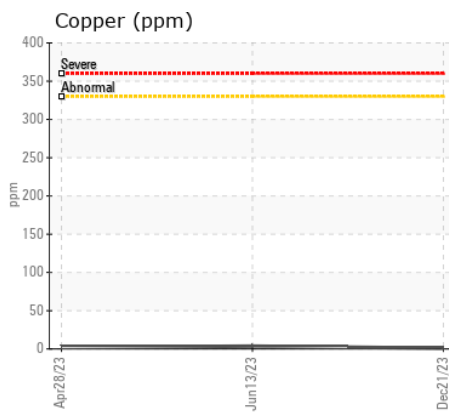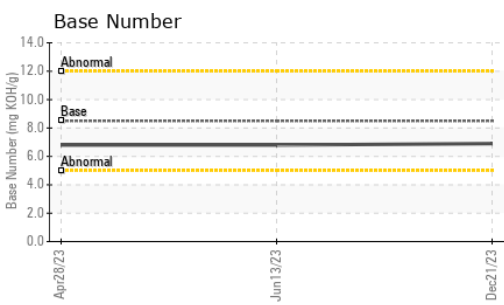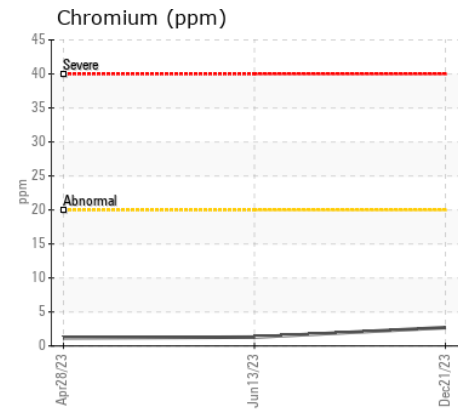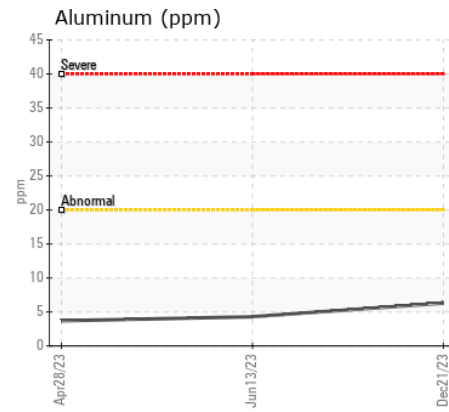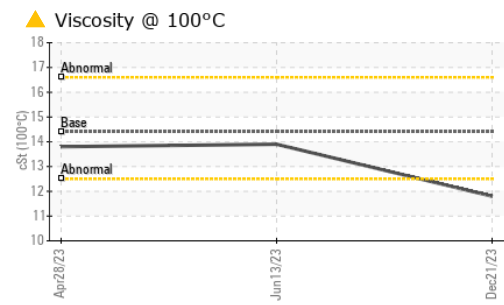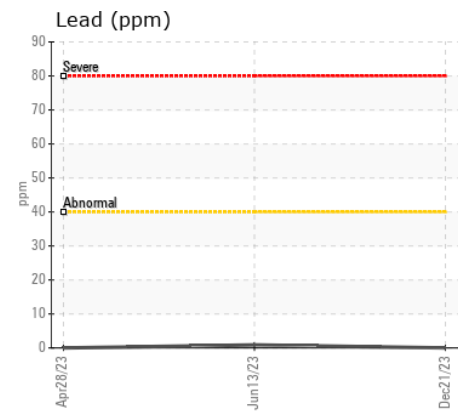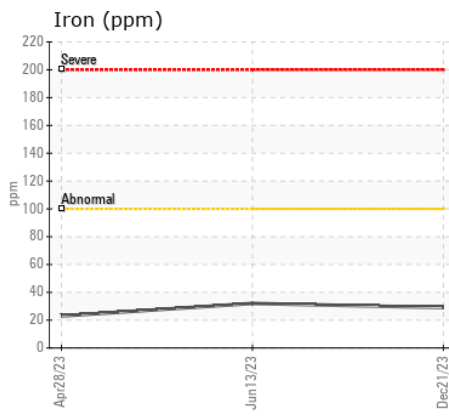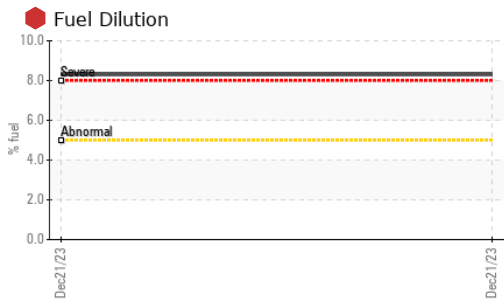

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0870670 **Received** : 16 Jan 2024
Lab Number : 06061696 **Diagnosed** : 18 Jan 2024
Unique Number : 10833078 **Diagnostician** : Jonathan Hester
Test Package : MOB 1 (Additional Tests: FuelDilution, Glycol, PercentFuel, TBN)

WAKE COUNTY PUBLIC SCHOOL SYSTEM
 1551 ROCK QUARRY ROAD
 RALEIGH, NC
 US 27610
 Contact: DEVIN WEBER
 dweber@wcpss.net
 T: (919)856-8076
 F: x:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)