



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1277**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0870762</b>	WC0821239	WC0761126
Sample Date		Client Info		<b>09 Nov 2023</b>	06 Jun 2023	09 Nov 2022
Machine Age	mls	Client Info		<b>159118</b>	154190	144911
Oil Age	mls	Client Info		<b>0</b>	0	0
Filter Age	mls	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>56</b>	28	48
Chromium	ppm	ASTM D5185m	>20	<b>2</b>	1	1
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>7</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>32</b>	21	73
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION











Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>14</b>	12	▲ 32
Potassium	ppm	ASTM D5185m	>20	<b>13</b>	3	13
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	0.3
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.9</b>	11.0	8.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	20.4	21.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>2</b>	3	<1
Boron	ppm	ASTM D5185m	250	<b>17</b>	31	112
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	2
Molybdenum	ppm	ASTM D5185m	100	<b>83</b>	81	68
Manganese	ppm	ASTM D5185m		<b>2</b>	<1	5
Magnesium	ppm	ASTM D5185m	450	<b>164</b>	57	384
Calcium	ppm	ASTM D5185m	3000	<b>2070</b>	2314	1789
Phosphorus	ppm	ASTM D5185m	1150	<b>1004</b>	1105	914
Zinc	ppm	ASTM D5185m	1350	<b>1227</b>	1343	1036
Sulfur	ppm	ASTM D5185m	4250	<b>3384</b>	4648	3558
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.3</b>	15.5	17.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>6.1</b>	6.8	9.0
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.3</b>	13.7	▲ 11.9

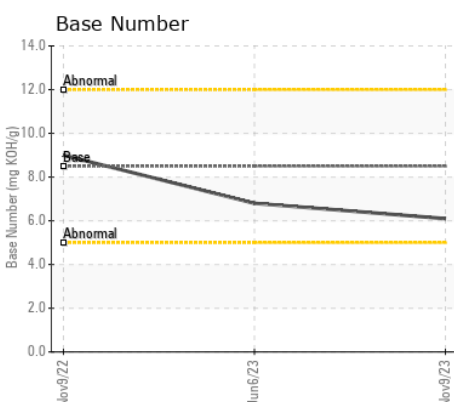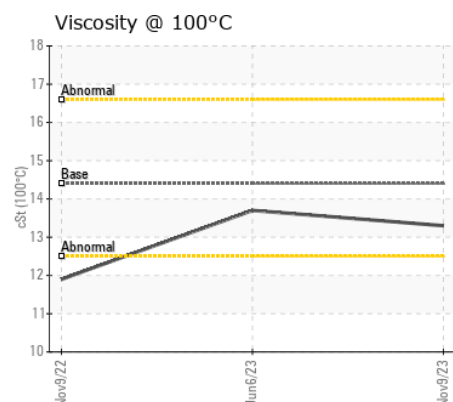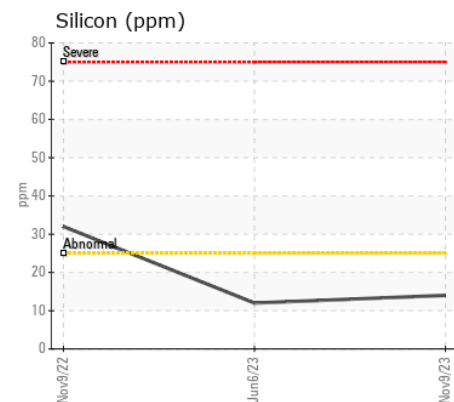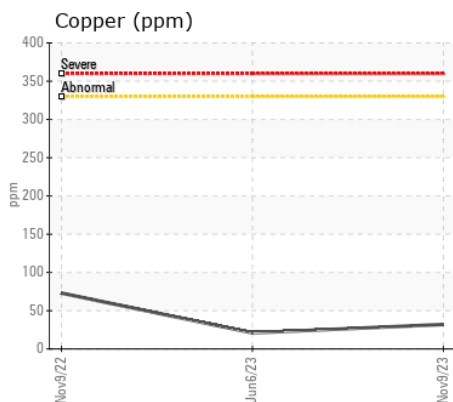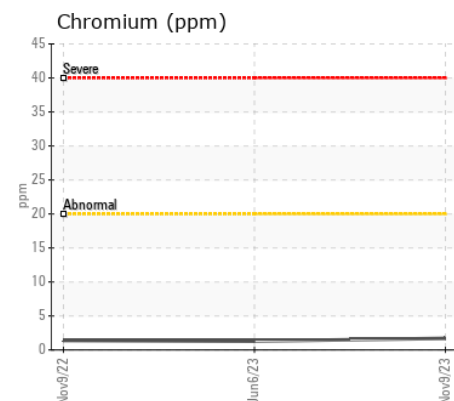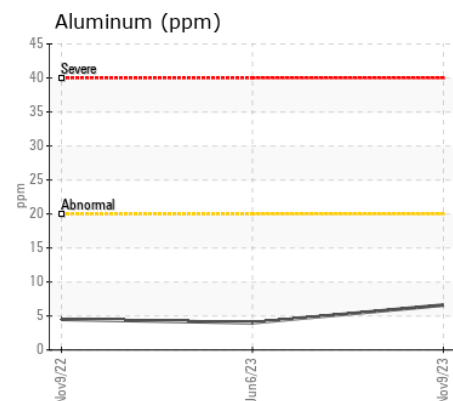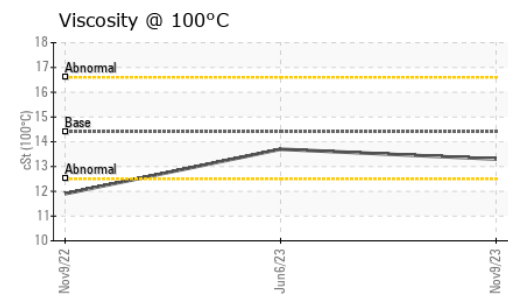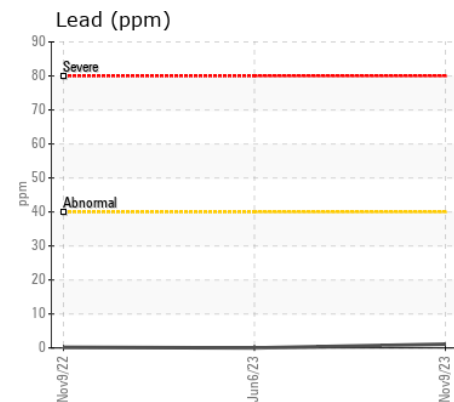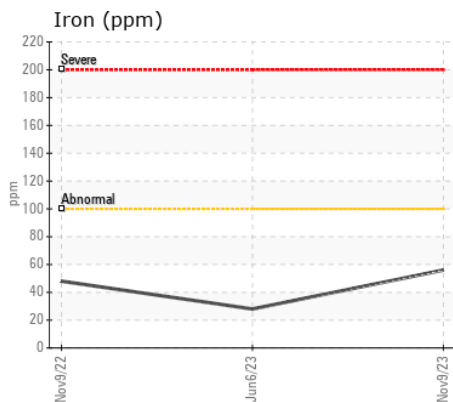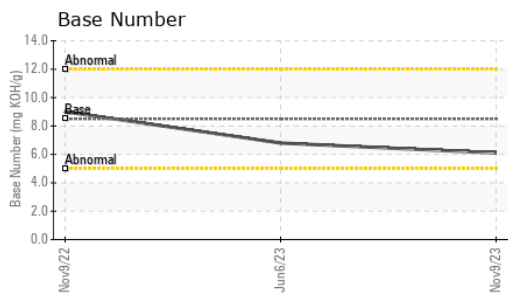

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0870762 **Received** : 16 Jan 2024  
**Lab Number** : 06061763 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833145 **Diagnostician** : Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: TBN )

**WAKE COUNTY PUBLIC SCHOOL SYSTEM**  
 1551 ROCK QUARRY ROAD  
 RALEIGH, NC  
 US 27610  
 Contact: DEVIN WEBER  
 dweber@wcpss.net  
 T: (919)856-8076  
 F: x:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)