



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**KIOTI PA4PA0320**  
Component  
**Diesel Engine**  
Fluid  
**KIOTI 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		KT0000867	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	hrs	Client Info		94	---	---
Oil Age	hrs	Client Info		94	---	---
Filter Age	hrs	Client Info		94	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

## WEAR

Metal levels are typical for a components first oil change.

Iron	ppm	ASTM D5185m	>100	31	---	---
Chromium	ppm	ASTM D5185m	>20	<1	---	---
Nickel	ppm	ASTM D5185m	>4	3	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>20	14	---	---
Lead	ppm	ASTM D5185m	>40	31	---	---
Copper	ppm	ASTM D5185m	>330	221	---	---
Tin	ppm	ASTM D5185m	>15	8	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	24	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	6.1	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	16.2	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		<1	---	---
Barium	ppm	ASTM D5185m		14	---	---
Molybdenum	ppm	ASTM D5185m		58	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		1031	---	---
Calcium	ppm	ASTM D5185m		1113	---	---
Phosphorus	ppm	ASTM D5185m		1005	---	---
Zinc	ppm	ASTM D5185m		1281	---	---
Sulfur	ppm	ASTM D5185m		3013	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	11.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.0	---	---
Visc @ 100°C	cSt	ASTM D445		11.5	---	---

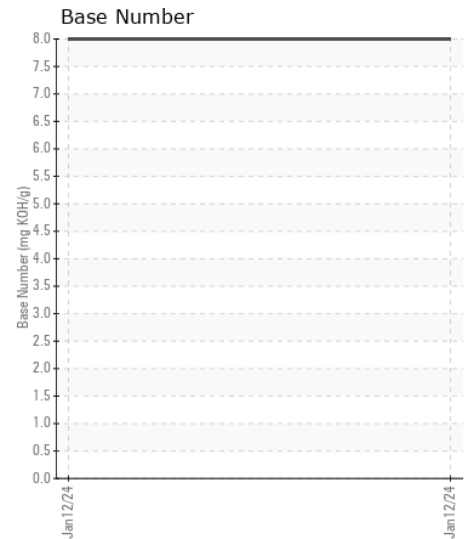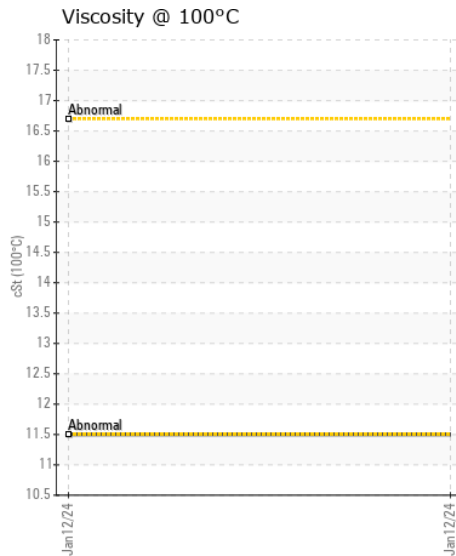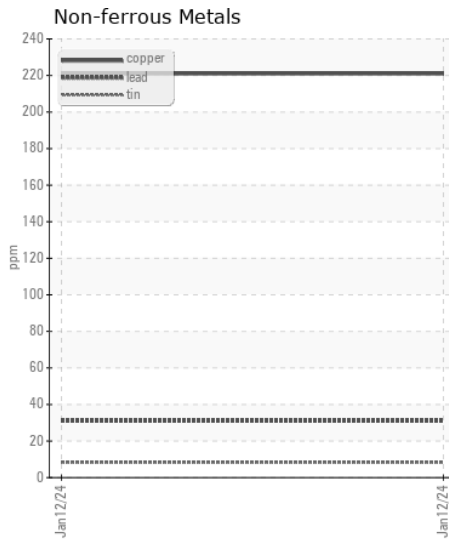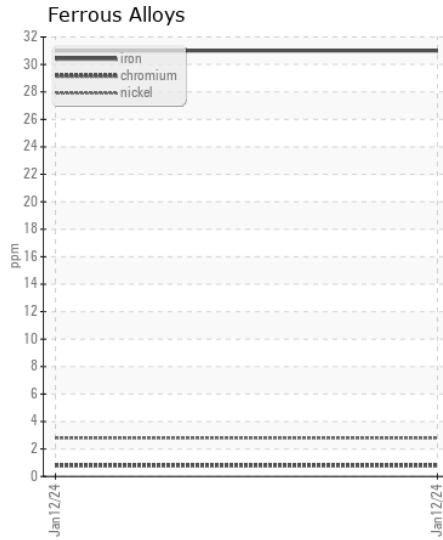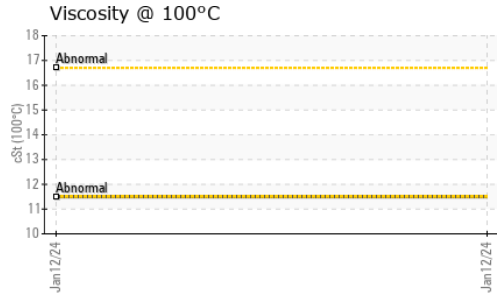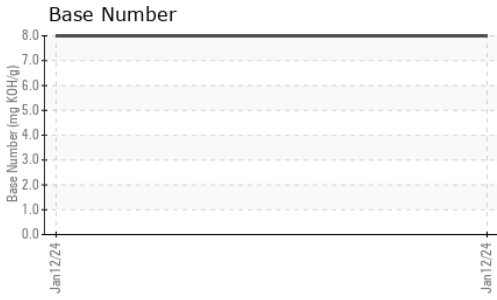

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KT0000867 **Received** : 16 Jan 2024  
**Lab Number** : 06061862 **Diagnosed** : 17 Jan 2024  
**Unique Number** : 10833244 **Diagnostician** : Wes Davis  
**Test Package** : CONST ( Additional Tests: TBN )

**PENNER TRAILER SALES**  
 3230 TULLAHOMA HWY  
 WINCHESTER, TN  
 US 37398  
 Contact: MITCHELL C.  
 mitchellc@pennertrailersales.com  
 T: (931)361-1122  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)