



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FALK GENE NEAL
Component
Port Reduction Gear
Fluid
CHEVRON GEAR COMPOUND EP 220 (135 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0057978	MW0058000	MW0057815
Sample Date		Client Info		01 Jan 2024	05 Dec 2023	06 Nov 2023
Machine Age	hrs	Client Info		27290	14425	26362
Oil Age	hrs	Client Info		14914	14425	13996
Filter Age	hrs	Client Info		180	372	648
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	Not Changd	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	21	18	21
Chromium	ppm	ASTM D5185m	>10	0	0	0
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	<1	<1
Lead	ppm	ASTM D5185m	>100	0	0	0
Copper	ppm	ASTM D5185m	>50	3	3	3
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	3	3	3
Potassium	ppm	ASTM D5185m	>20	2	<1	1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		58	53	62
Boron	ppm	ASTM D5185m		12	10	14
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	0	0
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		4	5	3
Calcium	ppm	ASTM D5185m		86	75	89
Phosphorus	ppm	ASTM D5185m		192	186	193
Zinc	ppm	ASTM D5185m		10	10	11
Sulfur	ppm	ASTM D5185m		5729	5695	5665
Acid Number (AN)	mg KOH/g	ASTM D8045		0.35	0.34	0.36
Visc @ 40°C	cSt	ASTM D445	209	222	220	▲ 244

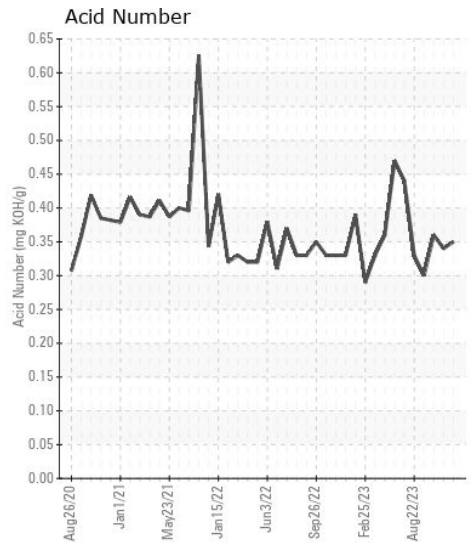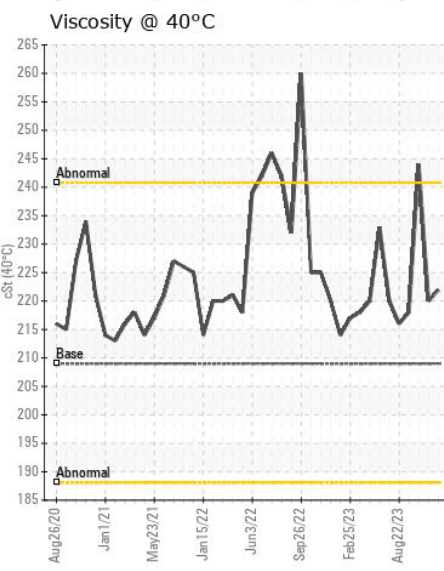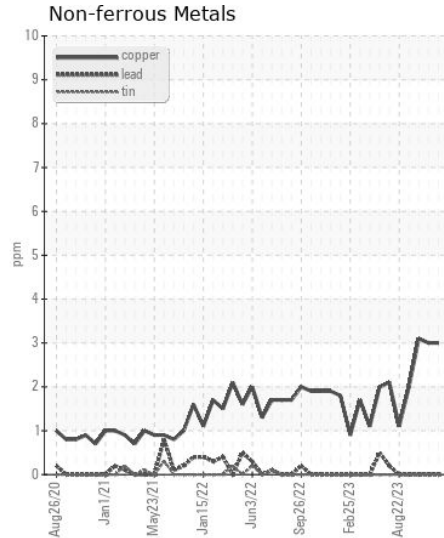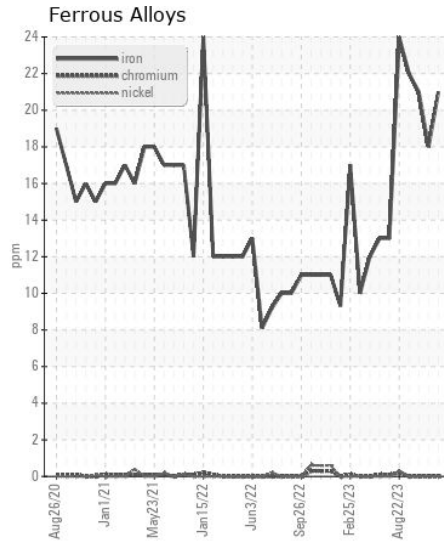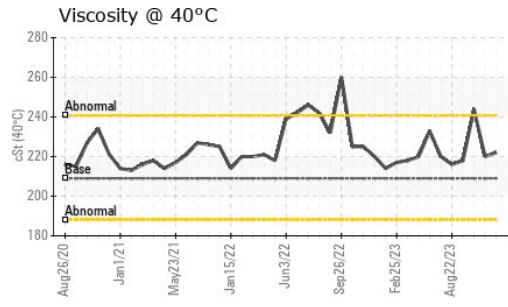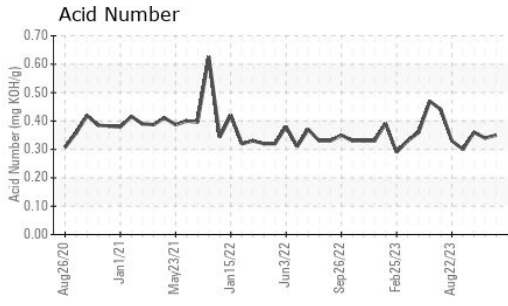

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0057978 **Received** : 16 Jan 2024
Lab Number : 06062123 **Diagnosed** : 18 Jan 2024
Unique Number : 10833505 **Diagnostician** : Wes Davis
Test Package : MAR 2

MAGNOLIA MARINE TRANSPORT
 697 HAINING ROAD
 VICKSBURG, MS
 US 39183
 Contact: MMT MAINTENANCE PLANNERS
 mmtmaintenanceplanners@ergon.com
 T: x:
 F: (601)638-8028

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)