



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
TAKEUCHI L-20

Component
Transmission

Fluid
FLEETLINE SUPERFLEET XHD 15W40 (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LP0001068	---	---
Sample Date		Client Info		09 Jan 2024	---	---
Machine Age	hrs	Client Info		232	---	---
Oil Age	hrs	Client Info		232	---	---
Filter Age	hrs	Client Info		232	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	1	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>50	1	---	---
Lead	ppm	ASTM D5185m	>50	0	---	---
Copper	ppm	ASTM D5185m	>200	2	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	<1	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		25	---	---
Boron	ppm	ASTM D5185m		146	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		12	---	---
Calcium	ppm	ASTM D5185m		2586	---	---
Phosphorus	ppm	ASTM D5185m		748	---	---
Zinc	ppm	ASTM D5185m		830	---	---
Sulfur	ppm	ASTM D5185m		2906	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.64	---	---
Visc @ 40°C	cSt	ASTM D445	118	68.8	---	---

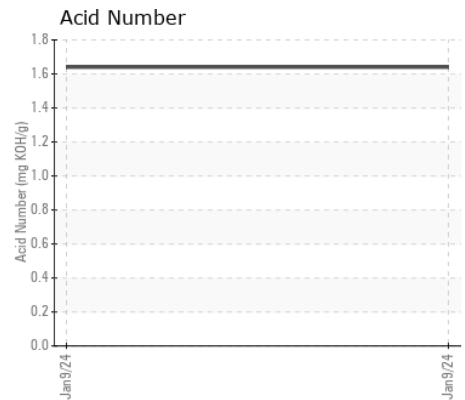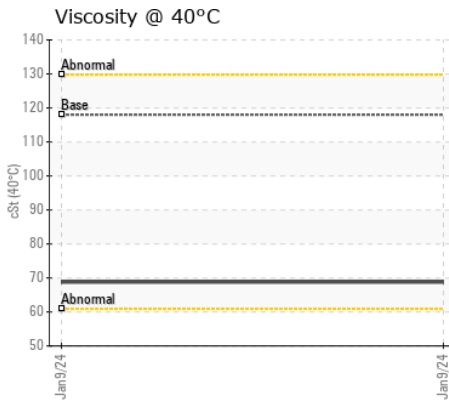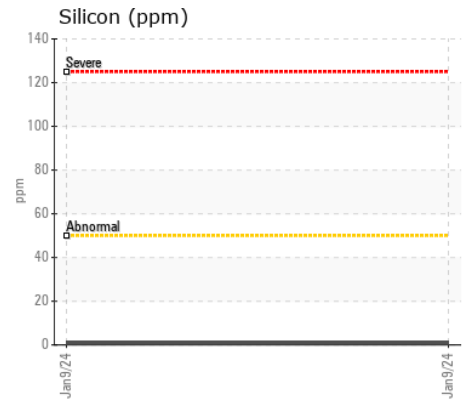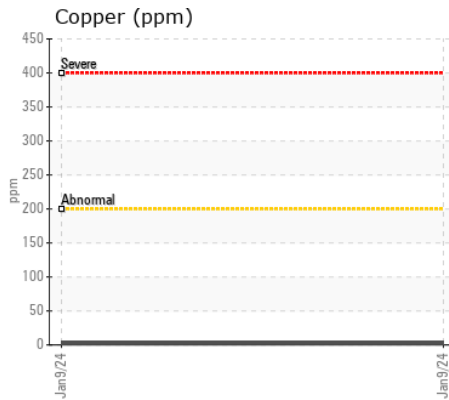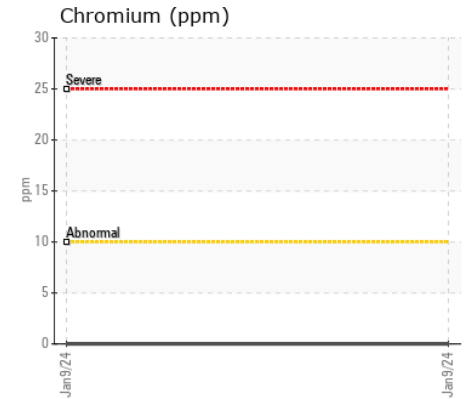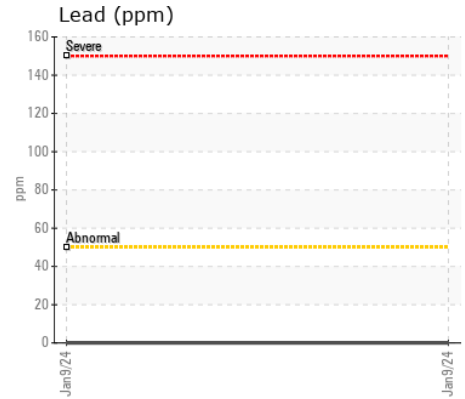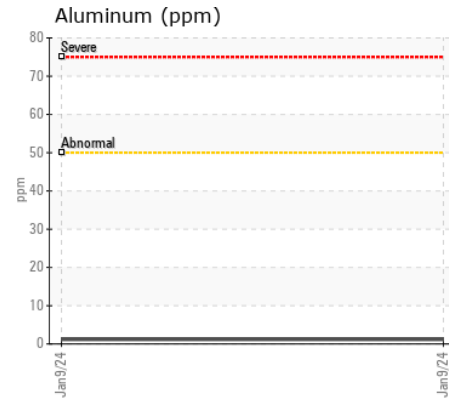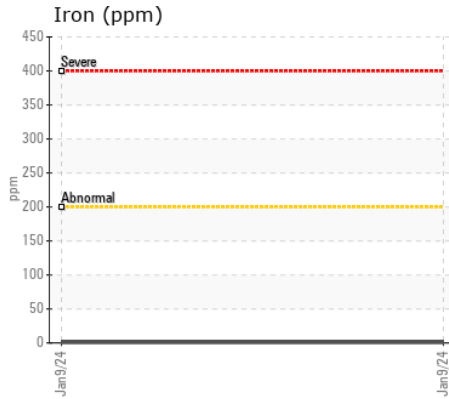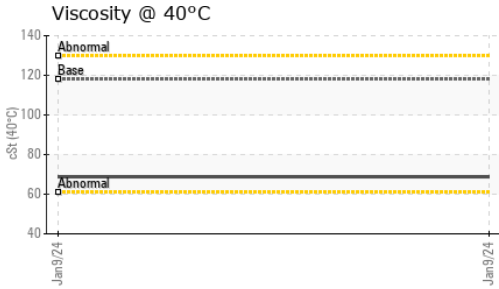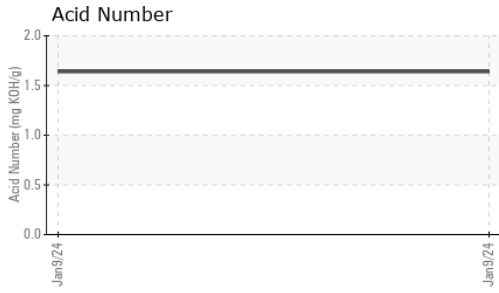

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LP0001068 **Received** : 16 Jan 2024
Lab Number : 06062147 **Diagnosed** : 18 Jan 2024
Unique Number : 10833529 **Diagnostician** : Don Baldrige
Test Package : MOB 2

S.M. LORUSSO & SONS
 221 NORFOLK ST.
 WALPOLE, MA
 US 02081
 Contact: PAUL BECKMAN
 pbeckman@smlorusso.com
 T: (508)668-2603
 F: (508)660-0232

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)