



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 324L 1LU324LXCZB064685

Component
Rear Left Final Drive

Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0201451	JR0168299	JR0135762
Sample Date		Client Info		08 Jan 2024	18 Apr 2023	29 Jul 2022
Machine Age	hrs	Client Info		2994	2050	1054
Oil Age	hrs	Client Info		944	996	1054
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	95	80	99
Iron	ppm	ASTM D5185m	>750	107	133	351
Chromium	ppm	ASTM D5185m	>9	2	2	6
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	<1	<1
Aluminum	ppm	ASTM D5185m	>40	<1	<1	2
Lead	ppm	ASTM D5185m	>15	0	0	<1
Copper	ppm	ASTM D5185m	>40	10	15	34
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.



Silicon	ppm	ASTM D5185m	>75	5	13	52
Potassium	ppm	ASTM D5185m	>20	0	0	2
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG

FLUID CONDITION


The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	0	2	3
Boron	ppm	ASTM D5185m		172	162	148
Barium	ppm	ASTM D5185m		<1	3	15
Molybdenum	ppm	ASTM D5185m		0	<1	<1
Manganese	ppm	ASTM D5185m		2	2	5
Magnesium	ppm	ASTM D5185m		2	2	5
Calcium	ppm	ASTM D5185m		115	197	886
Phosphorus	ppm	ASTM D5185m		1028	897	723
Zinc	ppm	ASTM D5185m		135	404	1589
Sulfur	ppm	ASTM D5185m		22157	17998	7627
Visc @ 40°C	cSt	ASTM D445		138	121	81.0


Viscosity @ 40°C

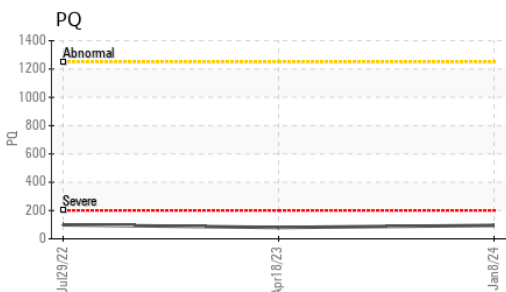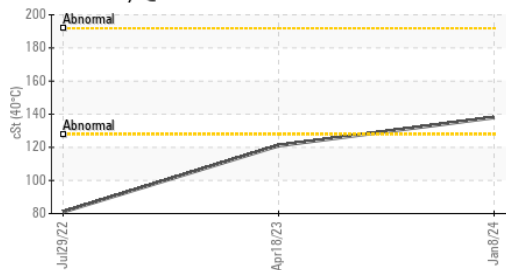


Ferrous Alloys

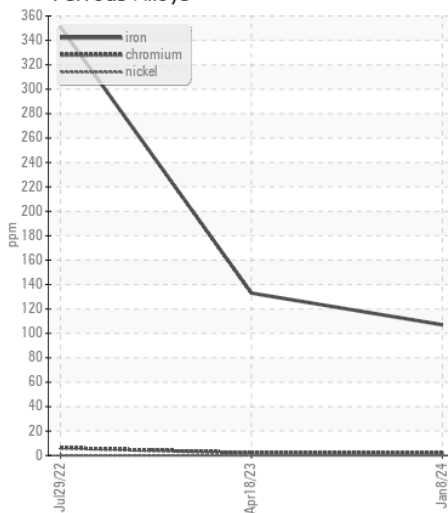


Non-ferrous Metals

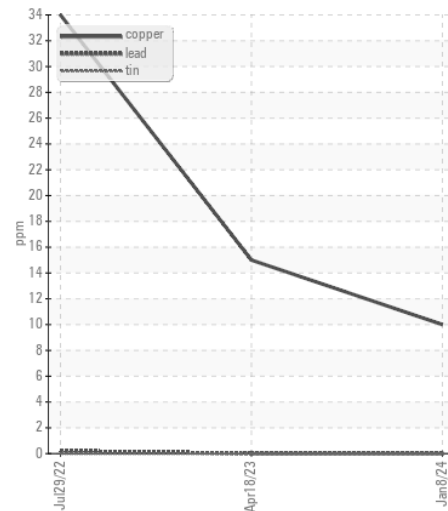

PQ

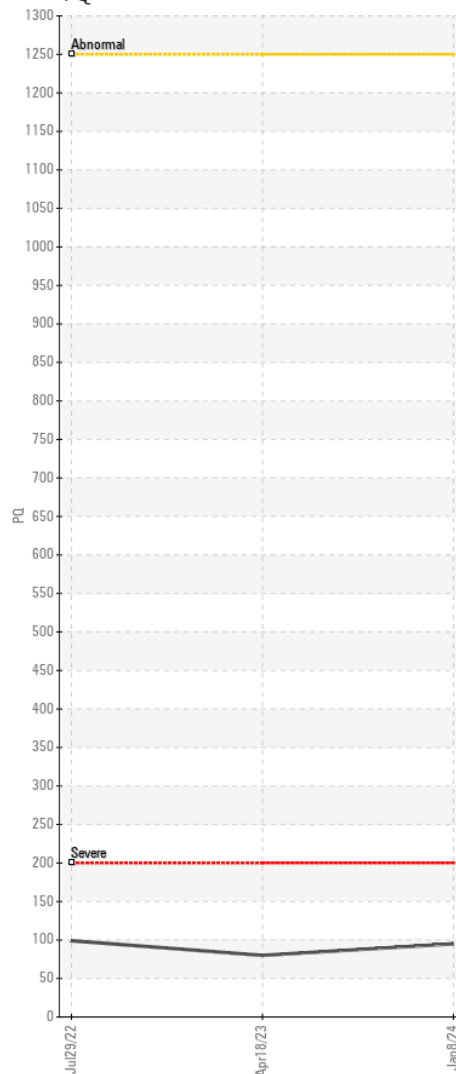

Viscosity @ 40°C

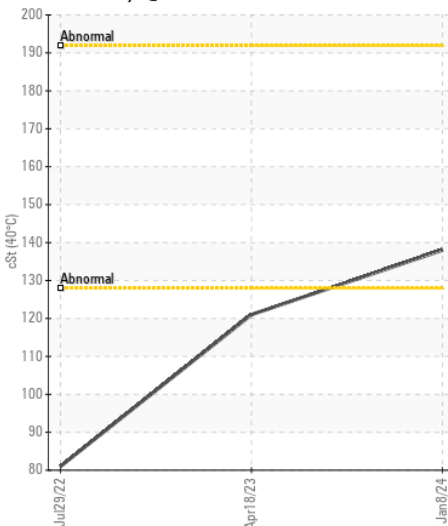

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0201451 **Recieved** : 16 Jan 2024
Lab Number : 06062213 **Diagnosed** : 18 Jan 2024
Unique Number : 10833595 **Diagnostician** : Don Baldridge
Test Package : CONST (Additional Tests: PQ)

JRE - ASHEVILLE
 101 BRUCE DRIVE
 ASHEVILLE, NC
 US 28806

Contact: Randy Warren
 randy.warren@jamesriverequipment.com

T: (528)667-0176
 F: (828)667-4865

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)