



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR R9150BH 038079-1857
Component
Splitter Box
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0268809	---	---
Sample Date		Client Info		27 Dec 2023	---	---
Machine Age	hrs	Client Info		1248	---	---
Oil Age	hrs	Client Info		748	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	40	---	---
Chromium	ppm	ASTM D5185m	>5	<1	---	---
Nickel	ppm	ASTM D5185m	>5	0	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	<1	---	---
Lead	ppm	ASTM D5185m	>30	0	---	---
Copper	ppm	ASTM D5185m	>20	4	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	3	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>25	0	---	---
Boron	ppm	ASTM D5185m	0	475	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	0	---	---
Manganese	ppm	ASTM D5185m	0	1	---	---
Magnesium	ppm	ASTM D5185m	<1	817	---	---
Calcium	ppm	ASTM D5185m	<1	28	---	---
Phosphorus	ppm	ASTM D5185m	2143	1450	---	---
Zinc	ppm	ASTM D5185m	<1	32	---	---
Sulfur	ppm	ASTM D5185m	23468	19735	---	---
Visc @ 40°C	cSt	ASTM D445	170	102	---	---

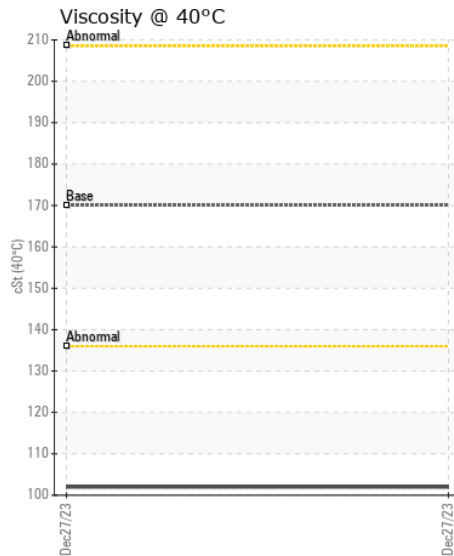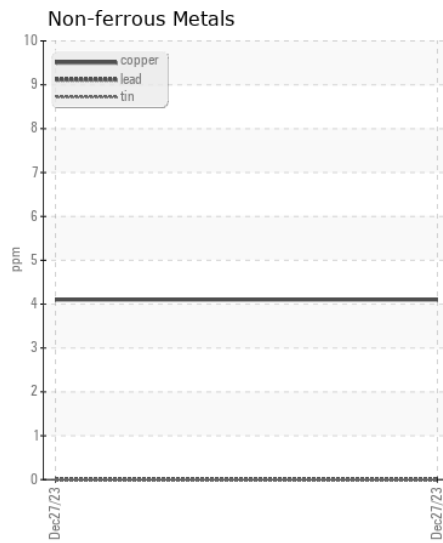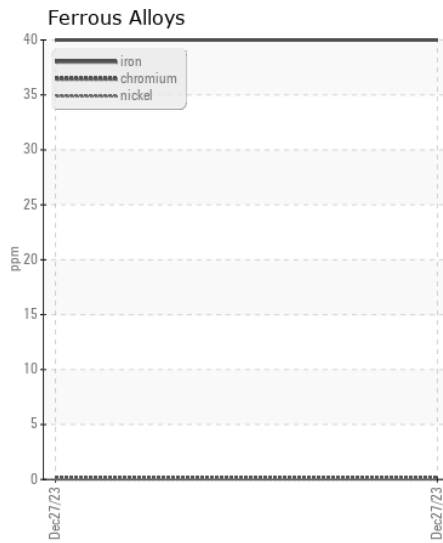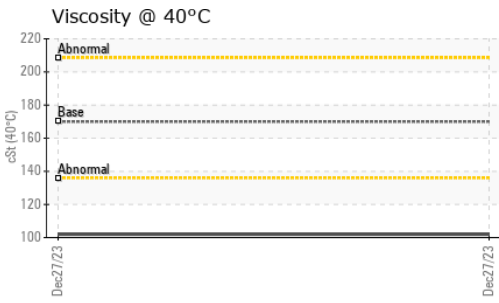

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0268809 **Received** : 16 Jan 2024
Lab Number : 06062246 **Diagnosed** : 18 Jan 2024
Unique Number : 10833628 **Diagnostician** : Don Baldrige
Test Package : CONST

FINKBINER EQUIPMENT CO.
 15 W 400 N FRONTAGE RD
 BURR RIDGE, IL
 US 60527
 Contact: DON FITZGERALD
 dfitzgerald@finkbiner.com
 T: (815)546-8991
 F: (630)654-3792

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)