



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
TREVOR SKELLY [7718151]
 Machine Id
VOLVO PENTA 1101053468
 Component
Starboard Diesel Engine
 Fluid
VOLVO VDS-4.5 Premium Motor Oil 15W40 (11 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA060868	VPA033465	---
Sample Date		Client Info		09 Jan 2024	28 Feb 2022	---
Machine Age	hrs	Client Info		1710	1388	---
Oil Age	hrs	Client Info		310	200	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	12	8	---
Chromium	ppm	ASTM D5185m	>6	<1	<1	---
Nickel	ppm	ASTM D5185m	>2	1	<1	---
Titanium	ppm	ASTM D5185m	>2	0	0	---
Silver	ppm	ASTM D5185m	>2	0	0	---
Aluminum	ppm	ASTM D5185m	>20	2	2	---
Lead	ppm	ASTM D5185m	>95	3	3	---
Copper	ppm	ASTM D5185m	>85	2	<1	---
Tin	ppm	ASTM D5185m	>9	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	3	---
Potassium	ppm	ASTM D5185m	>20	<1	2	---
Fuel		WC Method	>4.0	<1.0	<1.0	---
Water		WC Method	>0.1	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844		0.5	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.5	10.0	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.6	19.8	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	3	---
Boron	ppm	ASTM D5185m		38	77	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		53	14	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		907	776	---
Calcium	ppm	ASTM D5185m		1364	1598	---
Phosphorus	ppm	ASTM D5185m		1032	873	---
Zinc	ppm	ASTM D5185m		1220	909	---
Sulfur	ppm	ASTM D5185m		3261	2985	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.6	15.1	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.9	9.3	---
Visc @ 100°C	cSt	ASTM D445		12.9	13.4	---

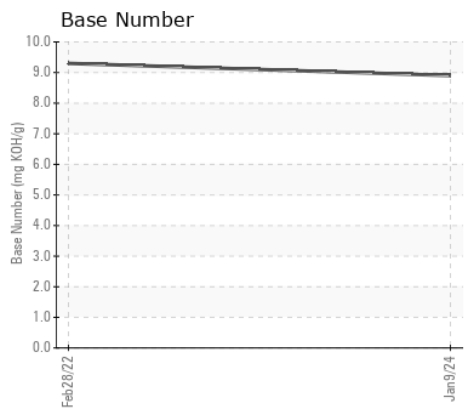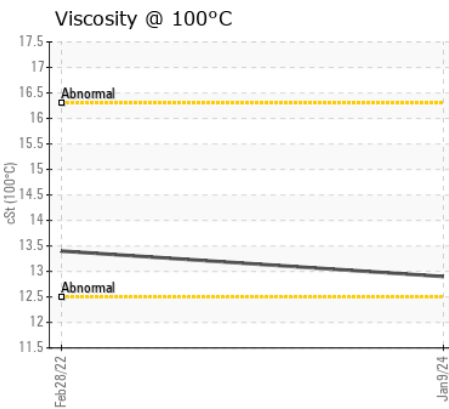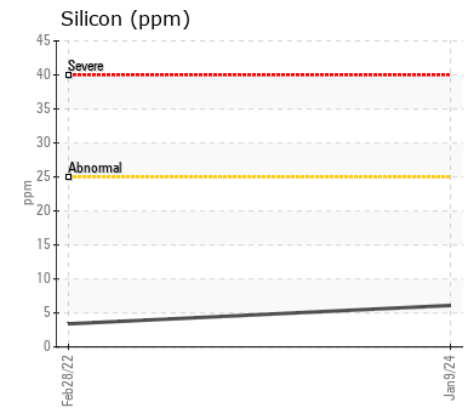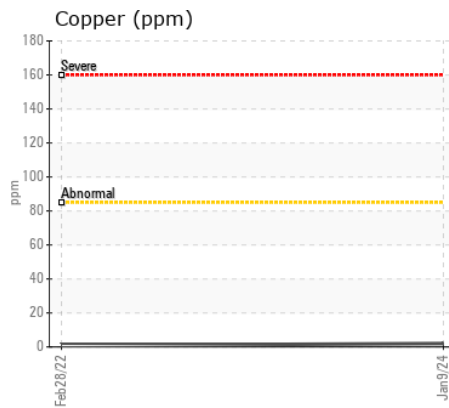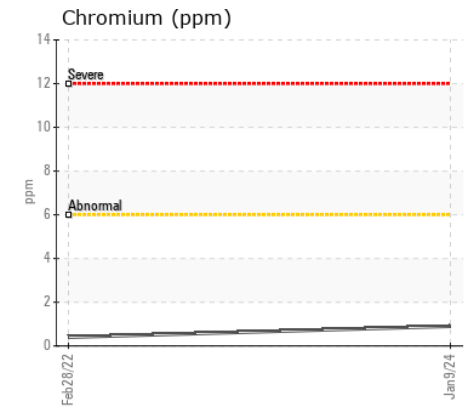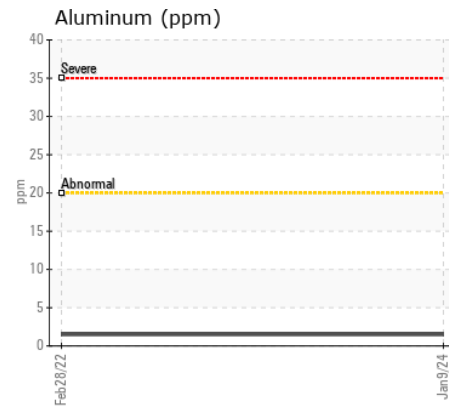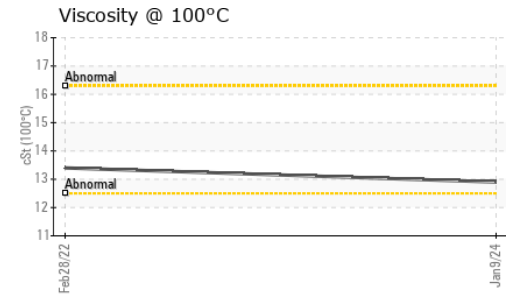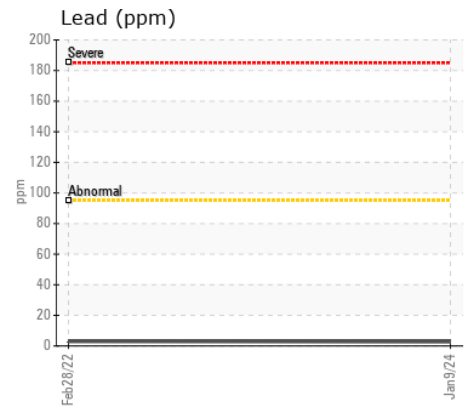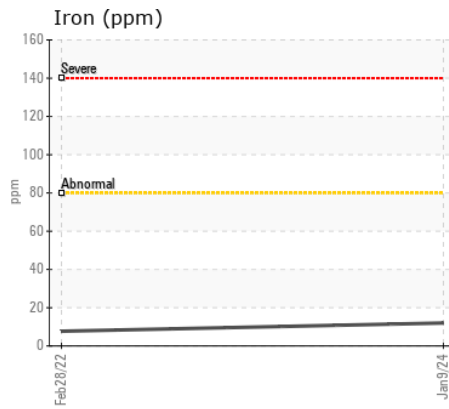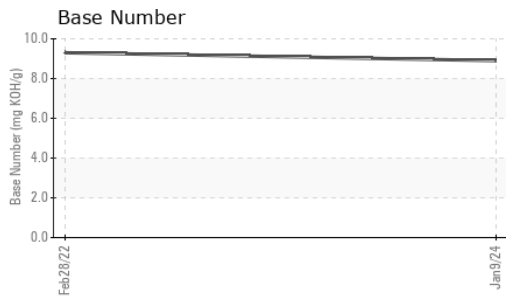

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VPA060868 **Received** : 17 Jan 2024
Lab Number : 06062304 **Diagnosed** : 18 Jan 2024
Unique Number : 10833686 **Diagnostician** : Sean Felton
Test Package : MOB 1 (Additional Tests: TBN)

Pacific Power Group - VP981534
 7215 S 228th St
 Kent, WA
 US 98032
 Contact: PAT RYAN
 pryan@pacificpowergroup.com
 T: (253)520-5163
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)