



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**MONTGOMERY**  
Machine Id  
**927047-162510**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0103523</b>	GFL0103515	GFL0094774
Sample Date		Client Info		<b>11 Jan 2024</b>	20 Dec 2023	30 Nov 2023
Machine Age	hrs	Client Info		<b>18224</b>	18061	17898
Oil Age	hrs	Client Info		<b>489</b>	326	163
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Not Changd	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	<b>8</b>	6	4
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>4</b>	3	2
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>330	<b>2</b>	<1	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>5</b>	5	6
Potassium	ppm	ASTM D5185m	>20	<b>9</b>	10	9
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>4	<b>0.3</b>	0.2	0.2
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.6</b>	7.5	6.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.9</b>	18.9	18.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>9</b>	6	6
Boron	ppm	ASTM D5185m	0	<b>8</b>	10	14
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>89</b>	87	87
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	1010	<b>930</b>	846	912
Calcium	ppm	ASTM D5185m	1070	<b>1082</b>	1010	1029
Phosphorus	ppm	ASTM D5185m	1150	<b>987</b>	851	976
Zinc	ppm	ASTM D5185m	1270	<b>1202</b>	1095	1194
Sulfur	ppm	ASTM D5185m	2060	<b>2803</b>	2857	2745
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.5</b>	15.2	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.4</b>	7.7	8.1
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.5</b>	13.0	13.4

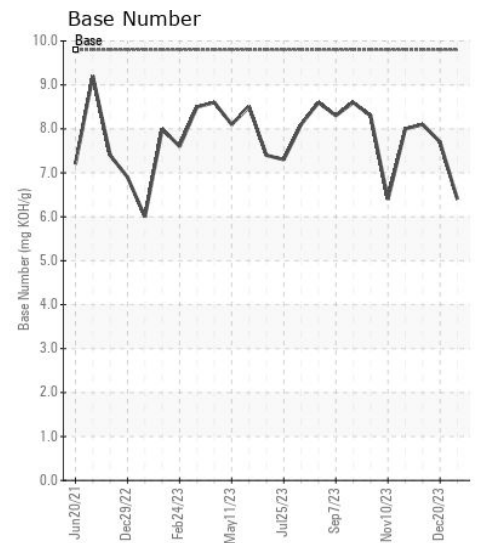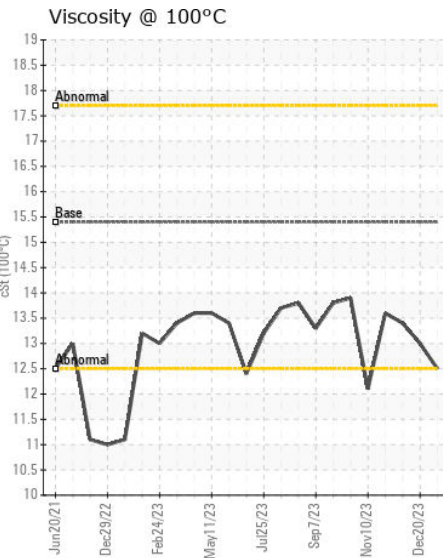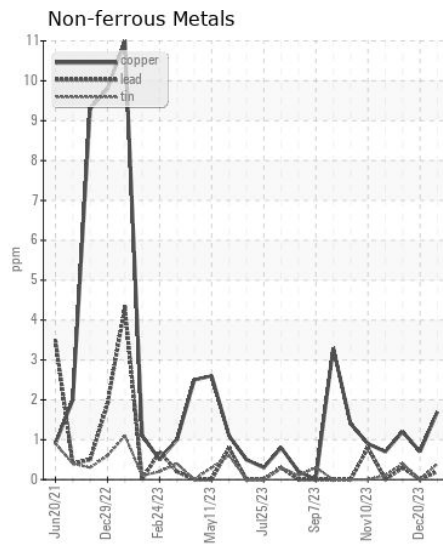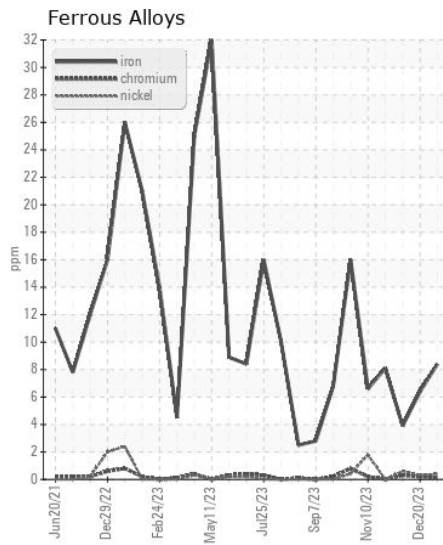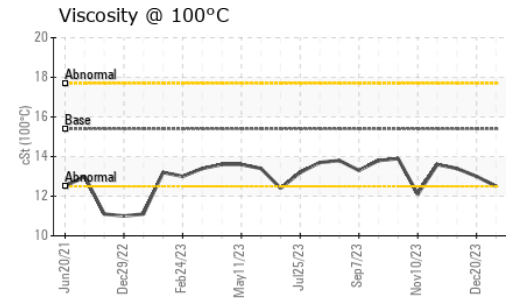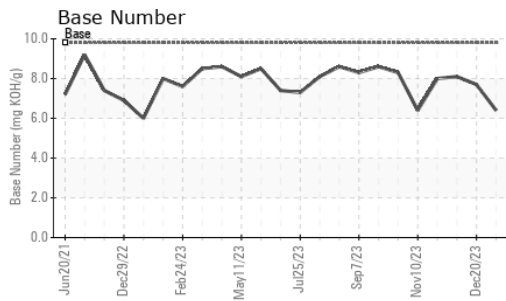

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103523 **Received** : 17 Jan 2024  
**Lab Number** : 06062326 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833708 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL environmental - 867 - Trafford (Blount Hauling)**  
 1130 County Line Rd  
 Trafford, AL  
 US 35172  
 Contact: Jonathan Williams  
 jonathan.williams@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: