



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**TALLASSEE**  
Machine Id  
**426044-365107**

Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0103514</b>	GFL0094793	GFL0086343
Sample Date		Client Info		<b>09 Jan 2024</b>	28 Nov 2023	02 Oct 2023
Machine Age	hrs	Client Info		<b>8367</b>	8354	8213
Oil Age	hrs	Client Info		<b>343</b>	330	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	N/A	N/A
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>110	<b>73</b>	64	48
Chromium	ppm	ASTM D5185m	>4	<b>4</b>	4	3
Nickel	ppm	ASTM D5185m	>2	<b>2</b>	2	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>7</b>	7	10
Lead	ppm	ASTM D5185m	>45	<b>&lt;1</b>	<1	<1
Copper	ppm	ASTM D5185m	>85	<b>2</b>	3	2
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>30	<b>10</b>	11	9
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	0.9	0.7
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.7</b>	9.4	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.4</b>	21.4	20.9
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>5</b>	4	5
Boron	ppm	ASTM D5185m	0	<b>13</b>	13	11
Barium	ppm	ASTM D5185m	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	60	<b>71</b>	68	66
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>1039</b>	996	1019
Calcium	ppm	ASTM D5185m	1070	<b>1238</b>	1205	1179
Phosphorus	ppm	ASTM D5185m	1150	<b>1105</b>	1081	1065
Zinc	ppm	ASTM D5185m	1270	<b>1351</b>	1342	1392
Sulfur	ppm	ASTM D5185m	2060	<b>3202</b>	2944	3404
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>17.8</b>	17.6	16.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>9.1</b>	8.6	8.8
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.6</b>	14.7	14.7

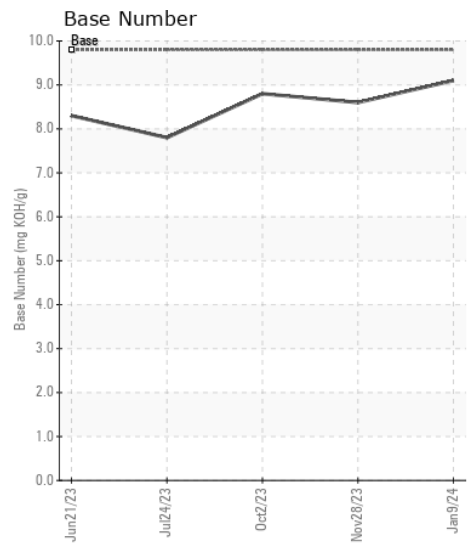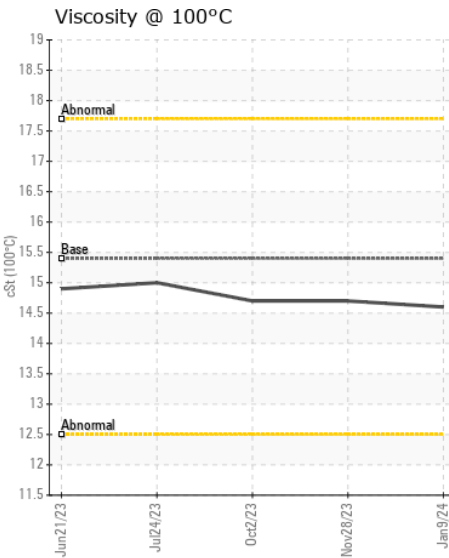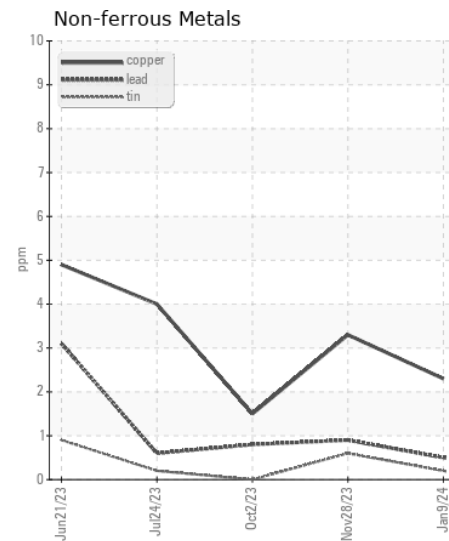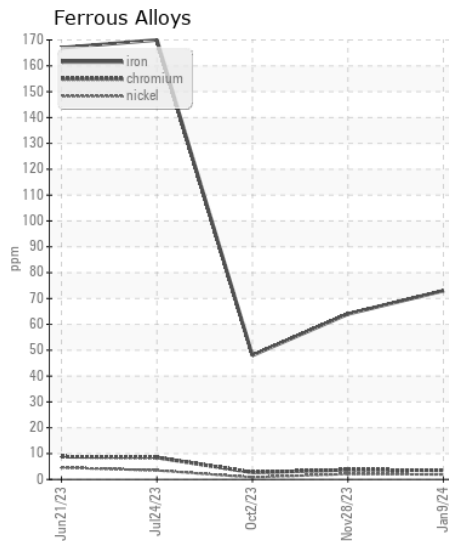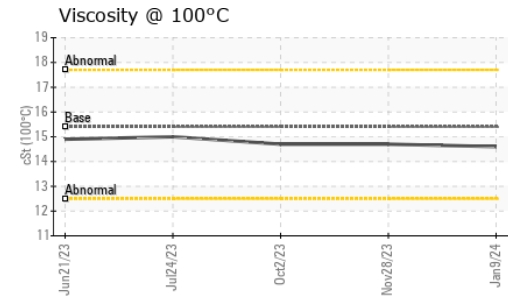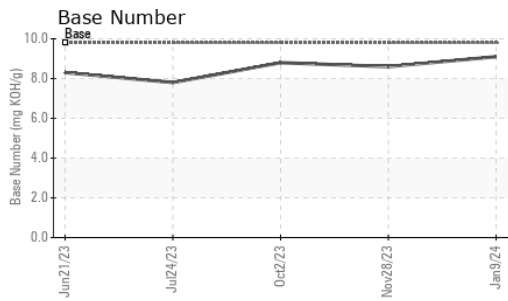

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103514 **Received** : 17 Jan 2024  
**Lab Number** : 06062328 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10833710 **Diagnostician** : Wes Davis  
**Test Package** : FLEET

**GFL environmental - 867 - Trafford (Blount Hauling)**  
 1130 County Line Rd  
 Trafford, AL  
 US 35172  
 Contact: Jonathan Williams  
 jonathan.williams@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)