



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
422024-402273
Component
Diesel Engine
Fluid
CHEVRON DELO 400 MULTIGRADE 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0025058	GFL0098454	GFL0086323
Sample Date		Client Info		10 Jan 2024	07 Nov 2023	05 Sep 2023
Machine Age	hrs	Client Info		3249	3119	2996
Oil Age	hrs	Client Info		825	695	572
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	Not Changd
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>120	11	6	3
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>5	5	0	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>20	4	2	<1
Lead	ppm	ASTM D5185m	>40	0	<1	0
Copper	ppm	ASTM D5185m	>330	12	<1	7
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	4	4
Potassium	ppm	ASTM D5185m	>20	2	3	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>4	0.3	0.4	0.1
Nitration	Abs/cm	*ASTM D7624	>20	7.3	5.8	4.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.3	19.2	18.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	0	3
Boron	ppm	ASTM D5185m	151	55	88	104
Barium	ppm	ASTM D5185m	0.4	0	6	0
Molybdenum	ppm	ASTM D5185m	250	74	73	76
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	0	874	819	919
Calcium	ppm	ASTM D5185m	2046	1176	1113	1256
Phosphorus	ppm	ASTM D5185m	1043	947	954	961
Zinc	ppm	ASTM D5185m	943	1141	1101	1150
Sulfur	ppm	ASTM D5185m	5012	2990	3183	3626
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.0	13.7	13.7
Base Number (BN)	mg KOH/g	ASTM D2896	12.5	8.2	8.7	9.1
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	14.2	13.8

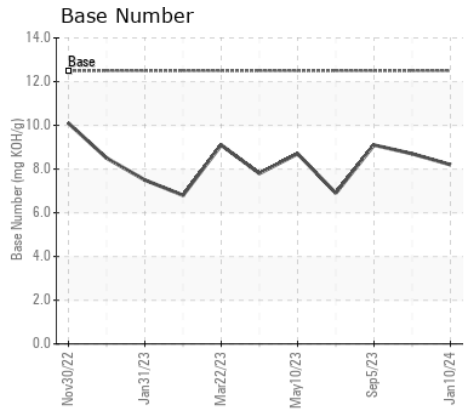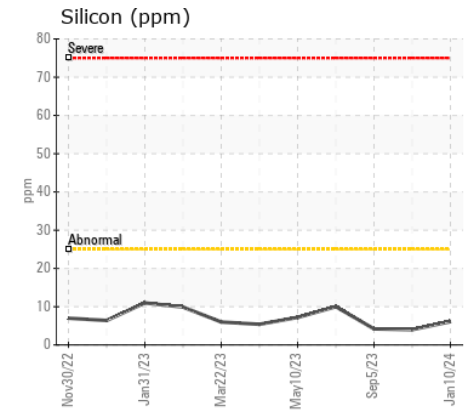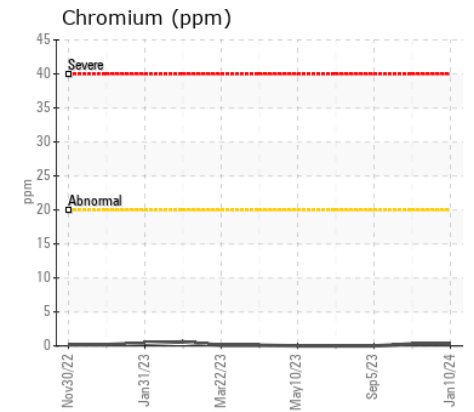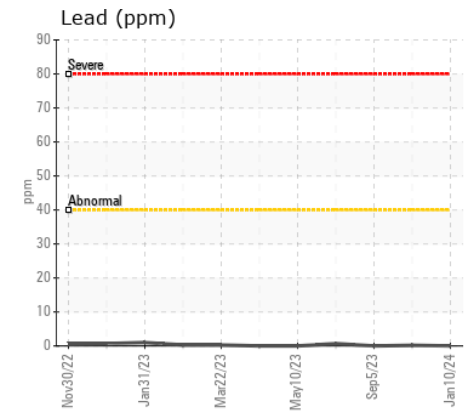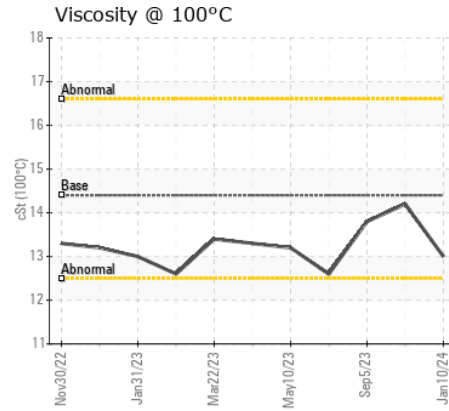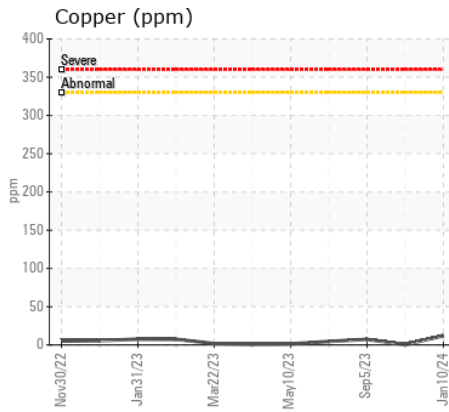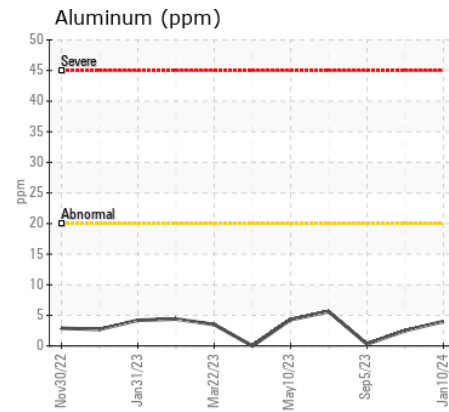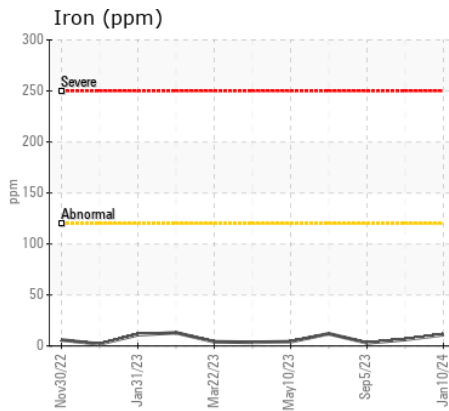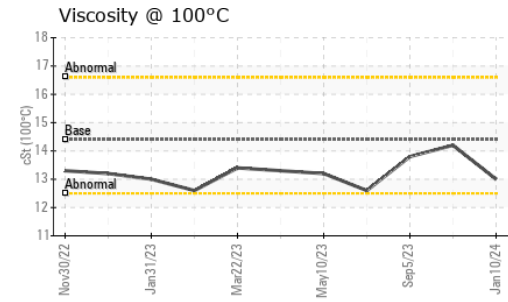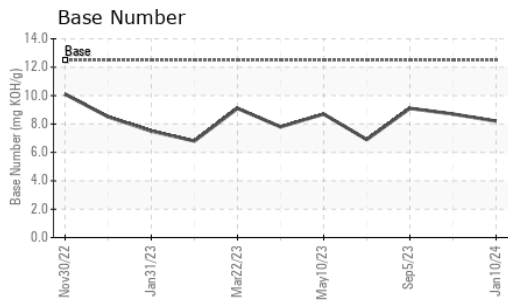

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0025058 **Received** : 17 Jan 2024
Lab Number : 06062384 **Diagnosed** : 18 Jan 2024
Unique Number : 10833766 **Diagnostician** : Sean Felton
Test Package : MOB1+

GFL Environmental - 180 - Tuscaloosa Hauling
 4701 12TH ST NE
 Tuscaloosa, AL
 US 35404
 Contact: FREDERICK ROGERS
 fred.rogers@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: