
WEAR CONTAMINATION FLUID CONDITION **ABNORMAL NORMAL NORMAL**

[W49140]

JOHN DEERE 331G 1T0331GKELF370893

Component Diesel Engine							
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (-	GAL)						
RECOMMENDATION		LIOM	Mathad	Limit/Alan	Current	History	Lliataru
Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.	Test Sample Number	UOM	Method Client Info	Limit/Abn	Current JR0200114	History1	History2
	Sample Date		Client Info		15 Jan 2024		
	Machine Age	hrs	Client Info		1246		
	Oil Age	hrs	Client Info		1246		
	Filter Age	hrs	Client Info		1246		
	Oil Changed	0	Client Info		Changed		
	Filter Changed		Client Info		Changed		
	Sample Status				ABNORMAL		
WEAR	Iron	nnm	ASTM D5185m	 . 51	<u>^</u> 76		
WEAR		ppm			2		
Cylinder, crank, or cam shaft wear is indicated. Bearing and/or bushing wear is indicated.	Chromium Nickel	ppm	ASTM D5185m ASTM D5185m				
		ppm		>0	<1 .•		
	Titanium Silver	ppm	ASTM D5185m ASTM D5185m	\ 2	<1 0		
	Aluminum	ppm	ASTM D5185m		6		
	Lead	ppm	ASTM D5185m		1		
	Copper	ppm	ASTM D5185m		ı ▲ 41		
	Tin	ppm	ASTM D5185m		<1		
	Vanadium	ppm	ASTM D5185m	24	<1		
	White Metal	scalar	*Visual	NONE	NONE		
	Yellow Metal	scalar	*Visual	NONE	NONE		
			Visuai	NONE			
There is no indication of any contamination in the oil.	Silicon	ppm	ASTM D5185m	>22	18		
	Potassium	ppm	ASTM D5185m	>20	1		
	Fuel		WC Method	>2.1	<1.0		
	Water		WC Method	>0.21	NEG		
	Glycol		WC Method		NEG		
	Soot %	%	*ASTM D7844	>3	0.8		
	Nitration	Abs/cm	*ASTM D7624	>20	15.1		
	Sulfation	Abs/.1mm	*ASTM D7415	>30	29.2		
	Silt	scalar	*Visual	NONE	NONE		
	Debris	scalar	*Visual	NONE	NONE		
	Sand/Dirt	scalar	*Visual	NONE	NONE		
	Appearance	scalar	*Visual	NORML	NORML		
	Odor	scalar	*Visual	NORML	NORML		
	Emulsified Water	scalar	*Visual	>0.21	NEG		
ELUID CONDITION	01'		40TM DE40E	04	4		
FLUID CONDITION	Sodium	ppm	ASTM D5185m	>31	4		
The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.	Boron	ppm	ASTM D5185m		33		
	Barium	ppm	ASTM D5185m		0		
	Molybdenum	ppm	ASTM D5185m		83		
	Manganese	ppm	ASTM D5185m		2		
	Magnesium Calcium	ppm	ASTM D5185m ASTM D5185m		660 2108		
	Phosphorus	ppm	ASTM D5185m		876		
	Zinc	ppm	ASTM D5185m		876 1175		
	Sulfur	ppm	ASTM D5185m		2274		
	Oxidation	ppm Abs/.1mm	*ASTM D7414	>25	33.1		
	Base Number (BN)		ASTM D7414 ASTM D2896		6.5		
	Visc @ 100°C	cSt	ASTM D2030		15.3		
	1.00 @ 100 0	331	. 10 1111 0 1110	10.7	13.0		

Contact/Location: DAVID ZIEG - JAMASH

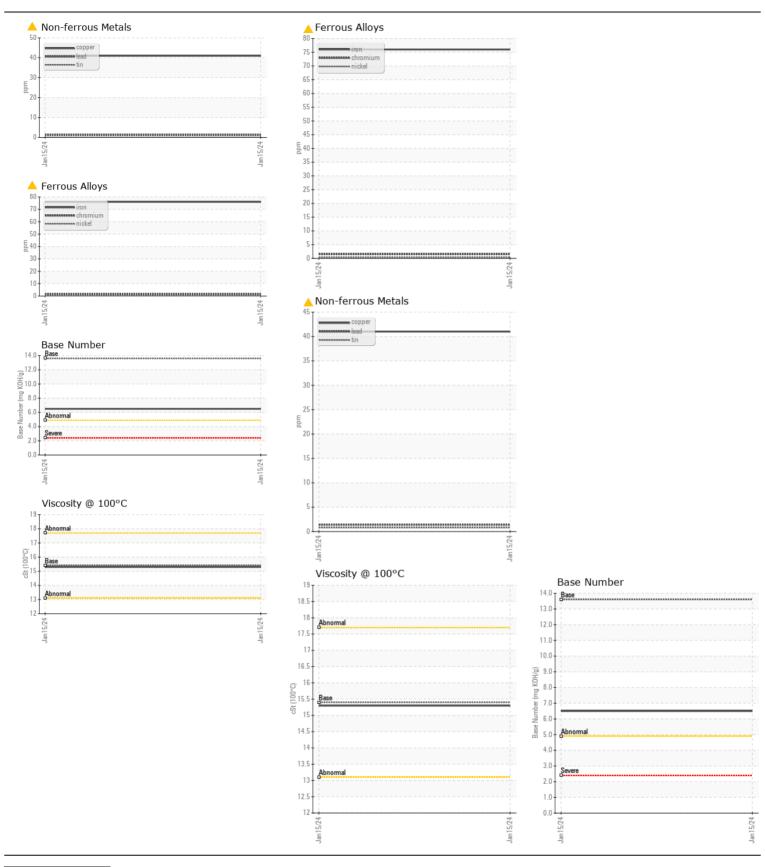



Laboratory Sample No.

Lab Number **Unique Number**

: JR0200114 : 06062510 : 10833892

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Recieved

Diagnosed Test Package : CONST (Additional Tests: TBN)

: 17 Jan 2024 : 18 Jan 2024 Diagnostician : Don Baldridge

Contact: DAVID ZIEG dzieg@jamesriverequipment.com

T: (804)798-6001 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND

ASHLAND, VA

US 23005

11047 LEADBETTER RD