



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	ATTENTION

Machine Id  
**BL072HD00343**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 46 (--- GAL)**

**RECOMMENDATION**

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0798393	---	---
Sample Date		Client Info		28 Dec 2023	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

**WEAR**











Iron	ppm	ASTM D5185m	>20	2	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	1	---	---
Lead	ppm	ASTM D5185m	>10	0	---	---
Copper	ppm	ASTM D5185m	>75	<1	---	---
Tin	ppm	ASTM D5185m	>10	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**

Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	▲ 65249	---	---
Particles >6µm		ASTM D7647	>1300	▲ 16098	---	---
Particles >14µm		ASTM D7647	>160	▲ 369	---	---
Particles >21µm		ASTM D7647	>40	▲ 48	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	▲ 23/21/16	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	LIGHT	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

Sodium	ppm	ASTM D5185m		<1	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m	25	12	---	---
Calcium	ppm	ASTM D5185m	200	231	---	---
Phosphorus	ppm	ASTM D5185m	300	418	---	---
Zinc	ppm	ASTM D5185m	370	523	---	---
Sulfur	ppm	ASTM D5185m	2500	1061	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.56	---	---
Visc @ 40°C	cSt	ASTM D445	46	▲ 54.8	---	---
Visc @ 100°C	cSt	ASTM D445	6.7	▲ 8.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270	97	116	---	---

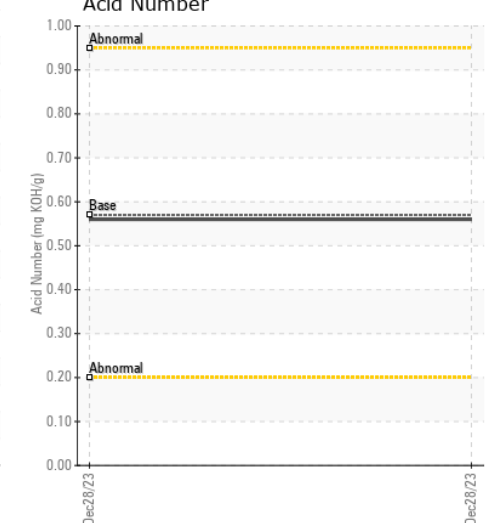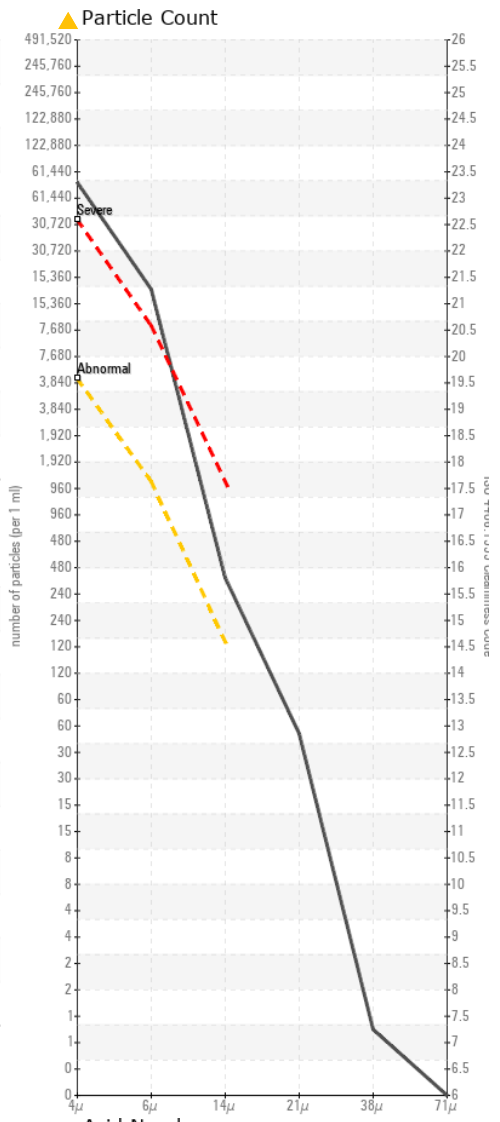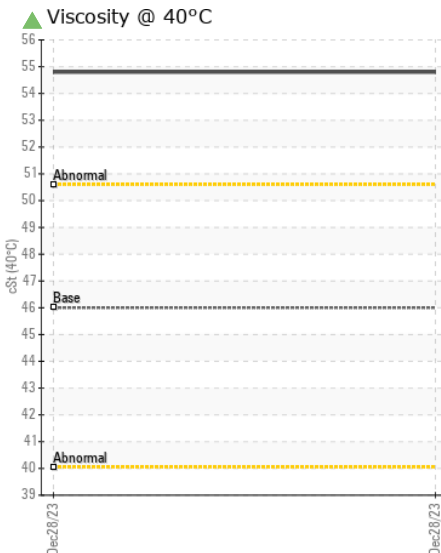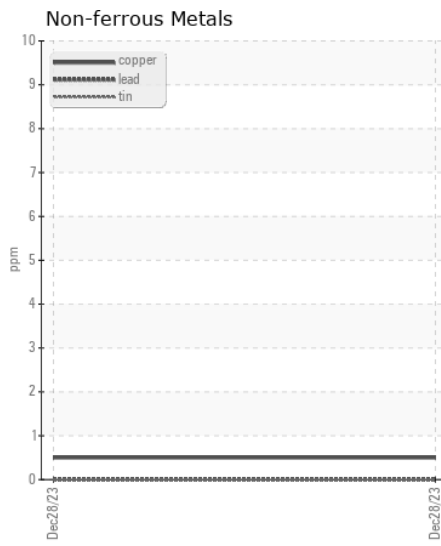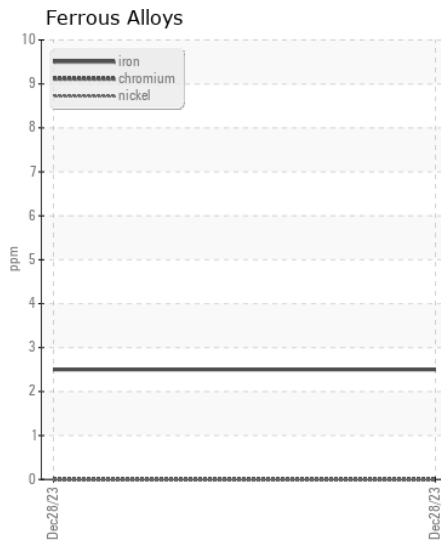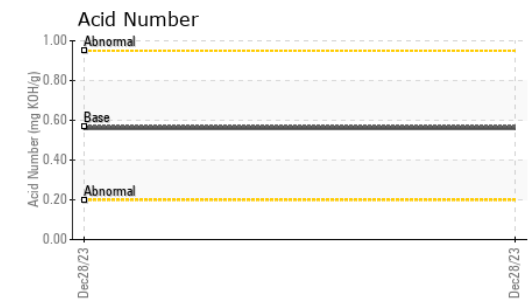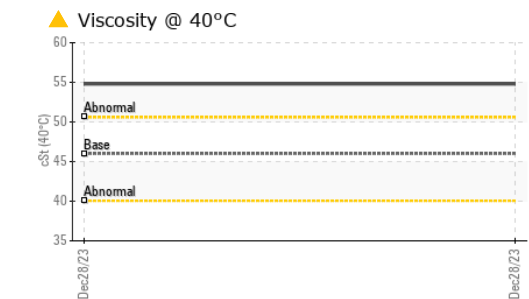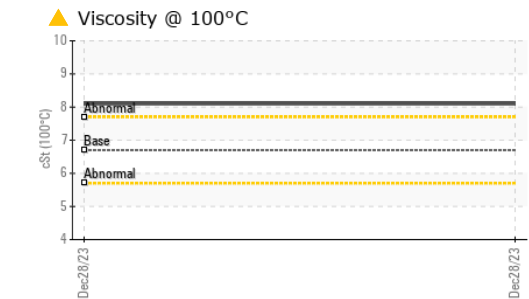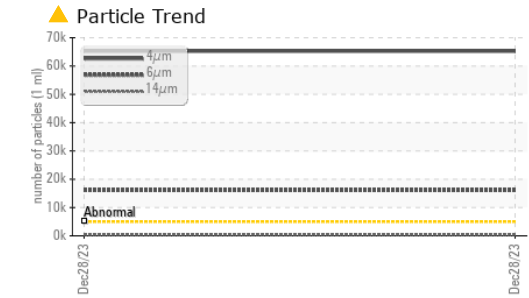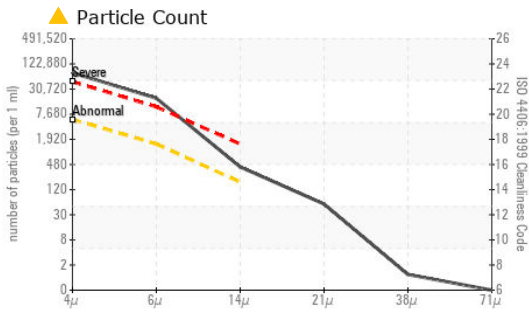

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0798393 **Received** : 17 Jan 2024  
**Lab Number** : 06062656 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10834038 **Diagnostician** : Jonathan Hester  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**HIAB USA - MIDATLANTIC**  
 18627 STARCREEK DR  
 CORNELIUS, NC  
 US 28031  
 Contact: SWANN MCCLURE  
 swann.mcclure@cargotec.com  
 T: (704)896-9089  
 F: (704)895-4801