



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CATERPILLAR 140M3 2293 (S/N CAT0140MKN9D01459)

Component
Transmission

Fluid
TRC MOLY XL PRO-SPEC 30W (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06062957	---	---
Sample Date		Client Info		13 Dec 2023	---	---
Machine Age	hrs	Client Info		3500	---	---
Oil Age	hrs	Client Info		500	---	---
Filter Age	hrs	Client Info		500	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	8	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m		0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		<1	---	---
Aluminum	ppm	ASTM D5185m	>50	10	---	---
Lead	ppm	ASTM D5185m	>50	1	---	---
Copper	ppm	ASTM D5185m	>200	81	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>50	9	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m		200	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		73	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		390	---	---
Calcium	ppm	ASTM D5185m		5283	---	---
Phosphorus	ppm	ASTM D5185m		846	---	---
Zinc	ppm	ASTM D5185m		997	---	---
Sulfur	ppm	ASTM D5185m		3690	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.00	---	---
Visc @ 40°C	cSt	ASTM D445		95.4	---	---
Visc @ 100°C	cSt	ASTM D445		12.0	---	---
Viscosity Index (VI)	Scale	ASTM D2270		117	---	---

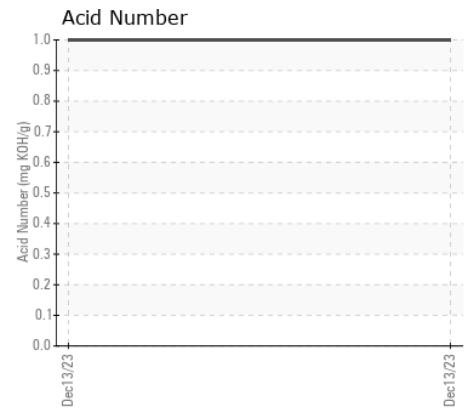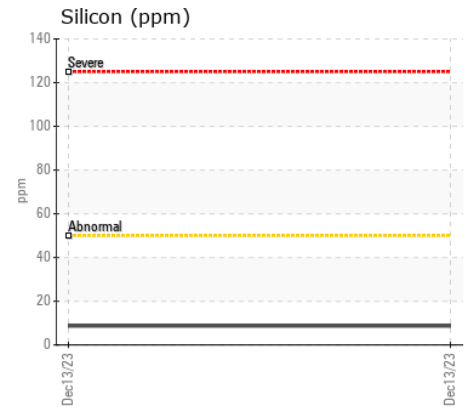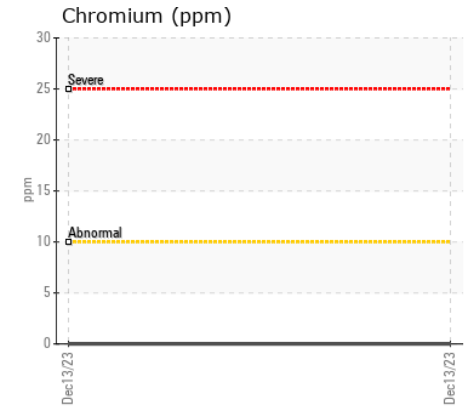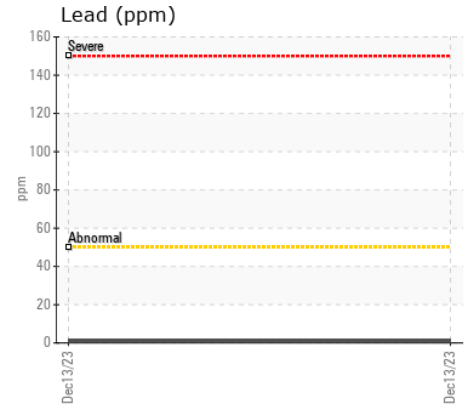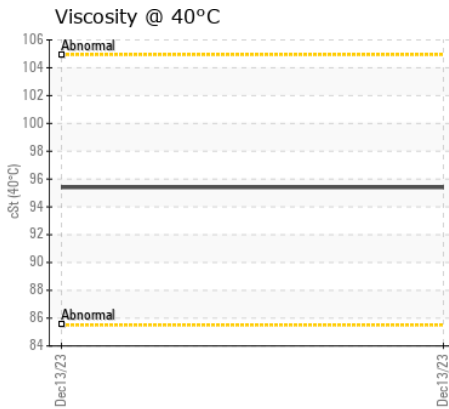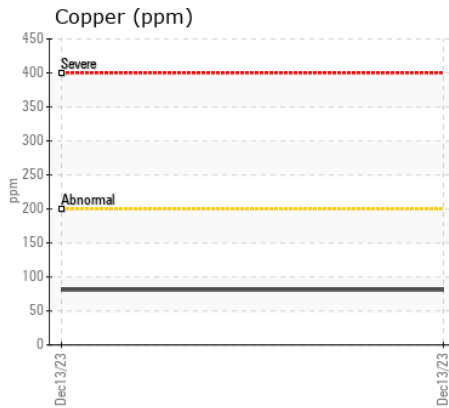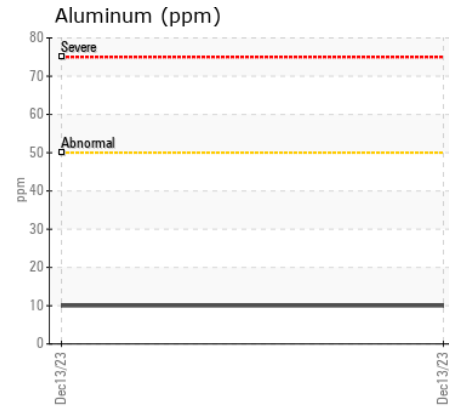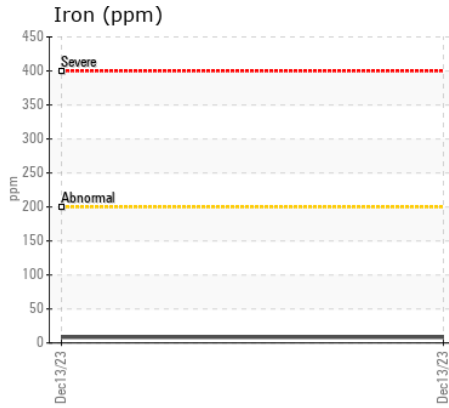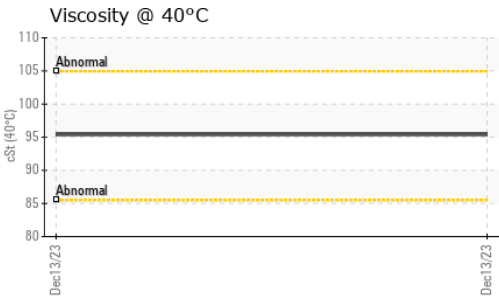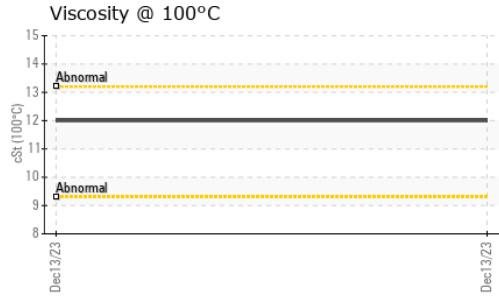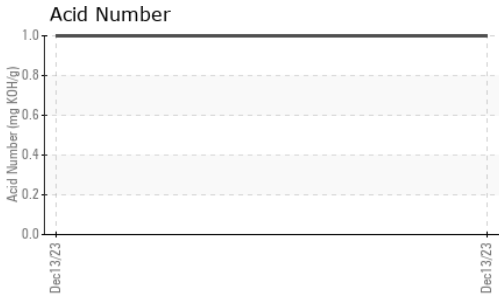

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06062957 **Received** : 17 Jan 2024
Lab Number : 06062957 **Diagnosed** : 18 Jan 2024
Unique Number : 10834339 **Diagnostician** : Wes Davis
Test Package : MOB 2 (Additional Tests: KV100, VI)

RANDALL COUNTY ROAD DEPT.
 301 WEST HIGHWAY 60
 CANYON, TX
 US 79015
 Contact: MIKE LEWIS

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: