



WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 624 P 1DW624PAKNLZ15938
 Component
Front Differential
 Fluid
TDH FLUID SAE 75W80 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0194401	JR0187242	JR0157859
Sample Date		Client Info		16 Jan 2024	20 Sep 2023	26 Mar 2023
Machine Age	hrs	Client Info		1984	1219	703
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	NORMAL	NORMAL

WEAR

Bearing and/or bushing wear is indicated.

PQ		ASTM D8184		11	17	16
Iron	ppm	ASTM D5185m	>500	74	63	56
Chromium	ppm	ASTM D5185m	>10	<1	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	<1
Lead	ppm	ASTM D5185m	>25	▲ 34	25	13
Copper	ppm	ASTM D5185m	>100	▲ 197	174	89
Tin	ppm	ASTM D5185m	>10	1	2	2
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	5	4	5
Potassium	ppm	ASTM D5185m	>20	<1	<1	1
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	7	4
Boron	ppm	ASTM D5185m	10	2	<1	1
Barium	ppm	ASTM D5185m	10	2	0	<1
Molybdenum	ppm	ASTM D5185m	10	<1	0	<1
Manganese	ppm	ASTM D5185m		2	2	2
Magnesium	ppm	ASTM D5185m	100	81	82	85
Calcium	ppm	ASTM D5185m	3500	3005	3166	3219
Phosphorus	ppm	ASTM D5185m	1150	1020	914	933
Zinc	ppm	ASTM D5185m	1150	1058	1087	1136
Sulfur	ppm	ASTM D5185m	5000	3801	3757	3890
Visc @ 40°C	cSt	ASTM D445	48	52.2	53.3	53.2

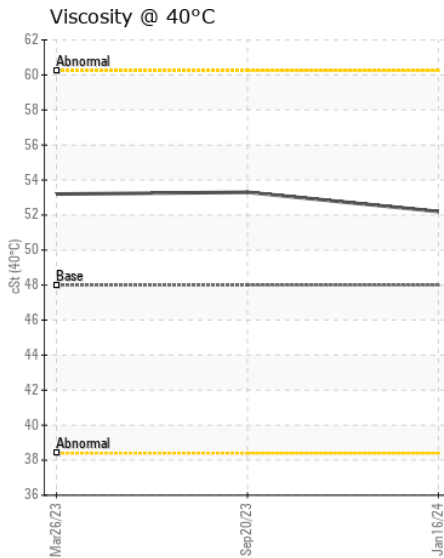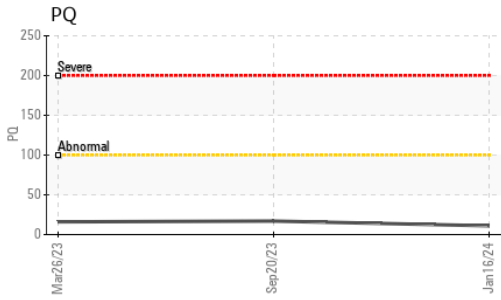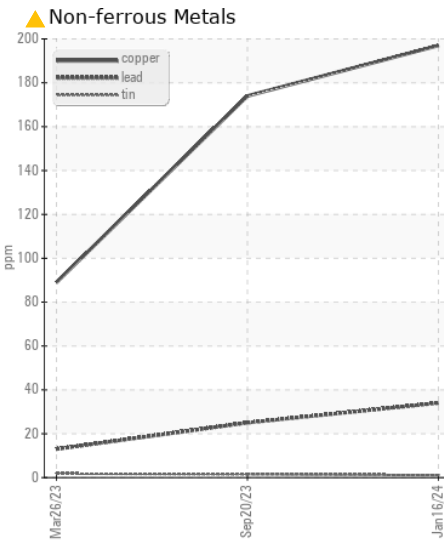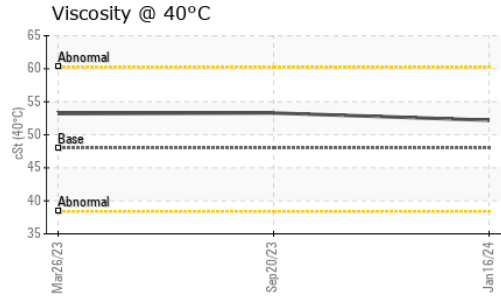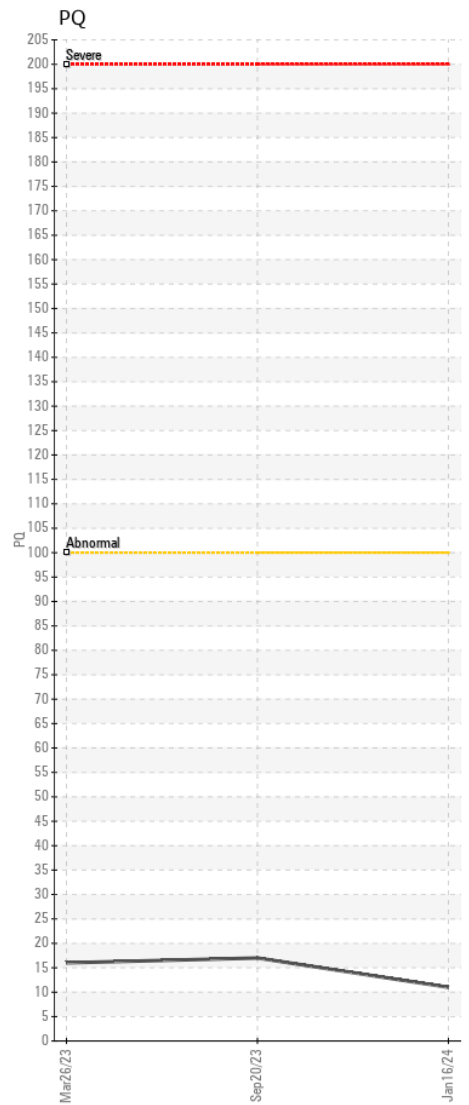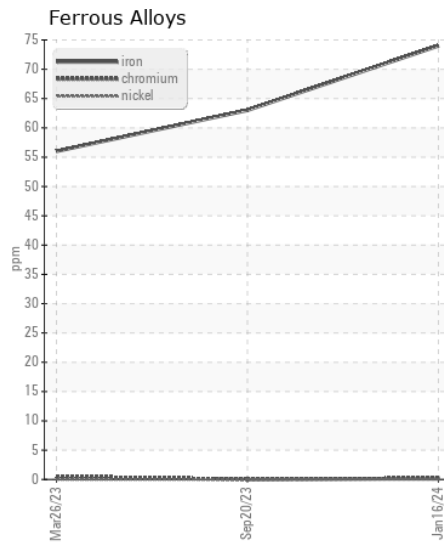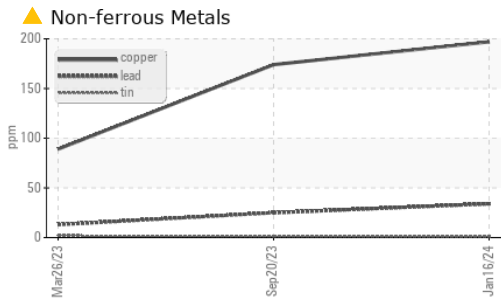

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0194401 **Received** : 17 Jan 2024
Lab Number : 06063056 **Diagnosed** : 18 Jan 2024
Unique Number : 10834438 **Diagnostician** : Sean Felton
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409

Contact: JUSTIN WILLIAMS
 justin.williams@jamesriverequipment.com

T: (336)668-2762
 F: (336)665-9556