



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**JOHN DEERE 624 P 1DW624PAKNLZ15938**

Component  
**Brake**  
Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0194403</b>	JR0187241	---
Sample Date		Client Info		<b>16 Jan 2024</b>	20 Sep 2023	---
Machine Age	hrs	Client Info		<b>1984</b>	1219	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>10</b>	41	---
Iron	ppm	ASTM D5185m	>350	<b>3</b>	83	---
Chromium	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>8	<b>&lt;1</b>	1	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	10	---
Copper	ppm	ASTM D5185m	>150	<b>2</b>	2	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>400	<b>6</b>	▲ 432	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>1</b>	12	---
Boron	ppm	ASTM D5185m		<b>52</b>	130	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>45</b>	323	---
Manganese	ppm	ASTM D5185m		<b>0</b>	2	---
Magnesium	ppm	ASTM D5185m		<b>231</b>	496	---
Calcium	ppm	ASTM D5185m		<b>2955</b>	1401	---
Phosphorus	ppm	ASTM D5185m		<b>1047</b>	671	---
Zinc	ppm	ASTM D5185m		<b>1198</b>	785	---
Sulfur	ppm	ASTM D5185m		<b>3611</b>	2750	---
Visc @ 40°C	cSt	ASTM D445		<b>66.1</b>	47.3	---

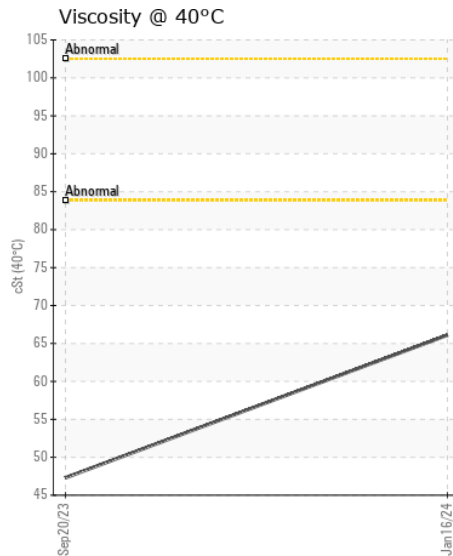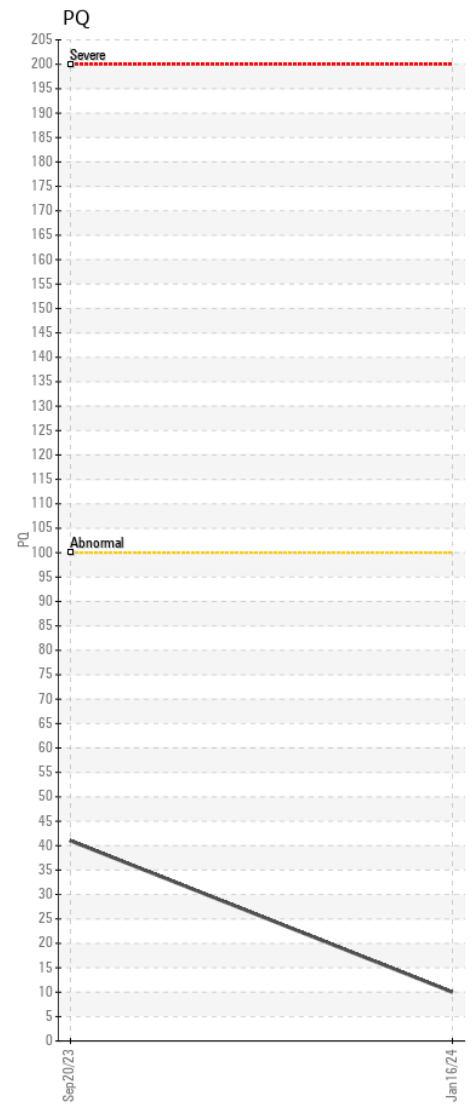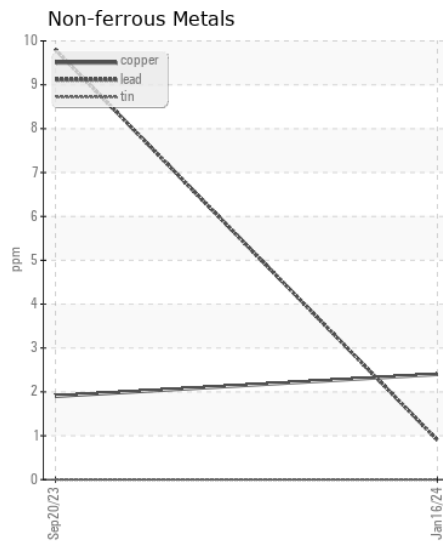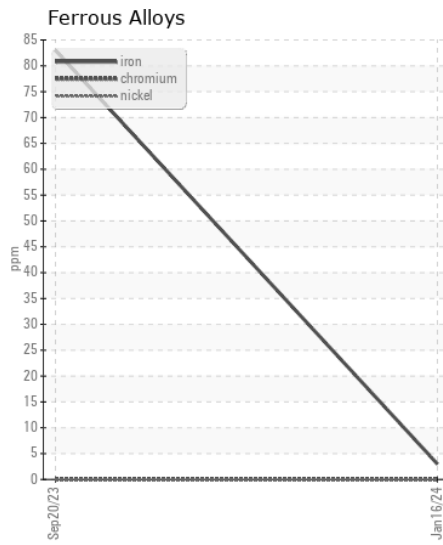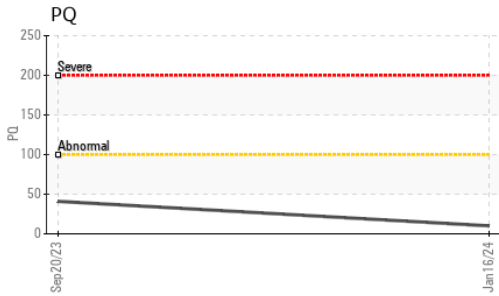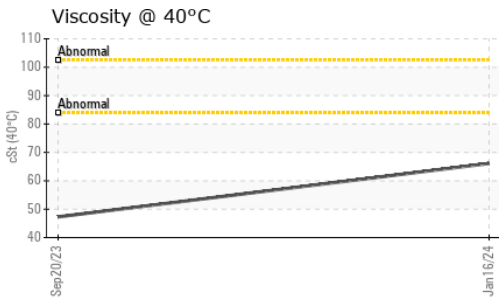

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0194403 **Received** : 17 Jan 2024  
**Lab Number** : 06063081 **Diagnosed** : 18 Jan 2024  
**Unique Number** : 10834463 **Diagnostician** : Sean Felton  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409

Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556