



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W49098]

Machine Id

JOHN DEERE 750L 1T0750LXENF429886

Component

Right Outer Final Drive

Fluid

JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200168	JR0165050	---
Sample Date		Client Info		11 Jan 2024	09 May 2023	---
Machine Age	hrs	Client Info		1939	969	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	184	69	---
Iron	ppm	ASTM D5185m	>750	258	86	---
Chromium	ppm	ASTM D5185m	>9	2	1	---
Nickel	ppm	ASTM D5185m	>10	2	<1	---
Titanium	ppm	ASTM D5185m		2	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	12	7	---
Lead	ppm	ASTM D5185m	>15	0	1	---
Copper	ppm	ASTM D5185m	>40	<1	0	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	74	16	---
Potassium	ppm	ASTM D5185m	>20	<1	4	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	2	2	---
Boron	ppm	ASTM D5185m	6	4	1	---
Barium	ppm	ASTM D5185m	0	1	0	---
Molybdenum	ppm	ASTM D5185m	0	4	<1	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m	145	118	112	---
Calcium	ppm	ASTM D5185m	3570	3232	3561	---
Phosphorus	ppm	ASTM D5185m	1290	1056	1036	---
Zinc	ppm	ASTM D5185m	1640	1206	1304	---
Sulfur	ppm	ASTM D5185m		3848	4214	---
Visc @ 40°C	cSt	ASTM D445	57.0	53.0	51.2	---

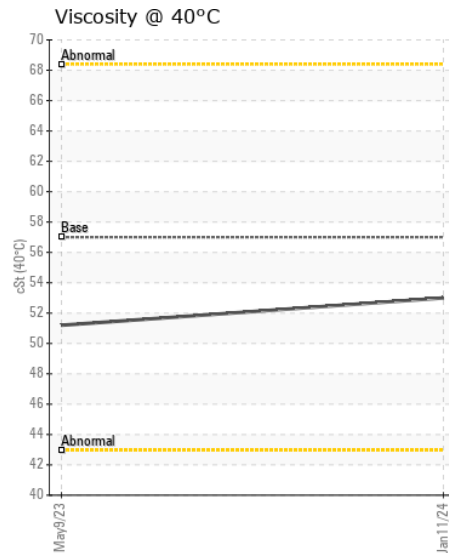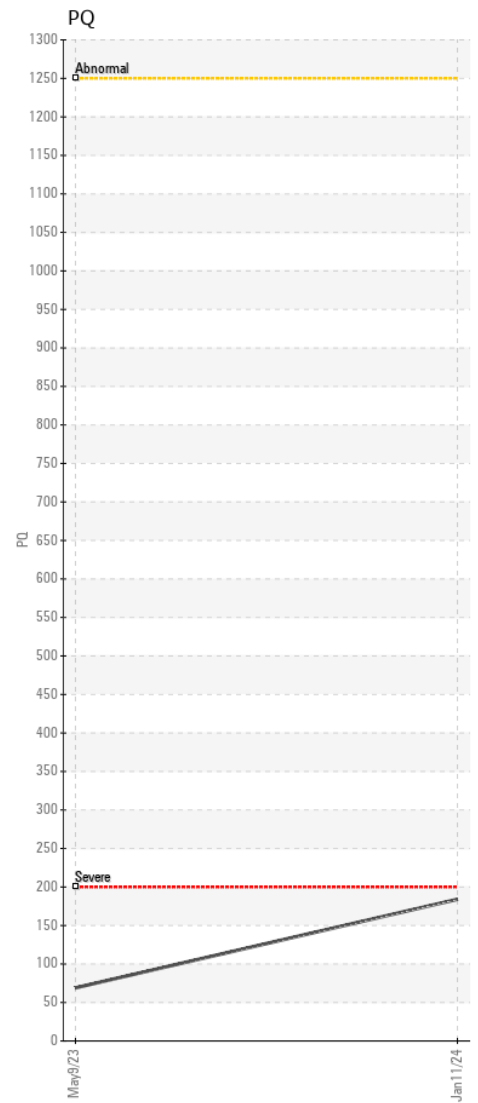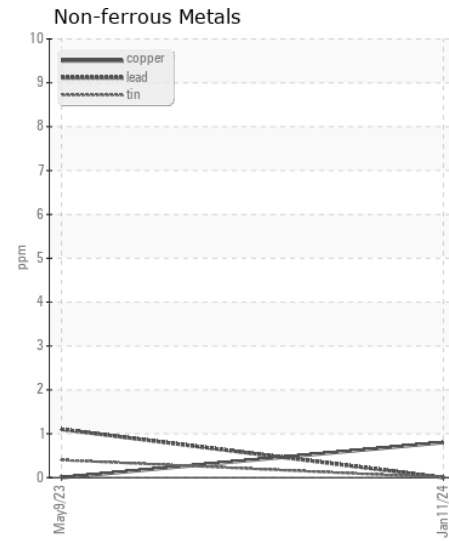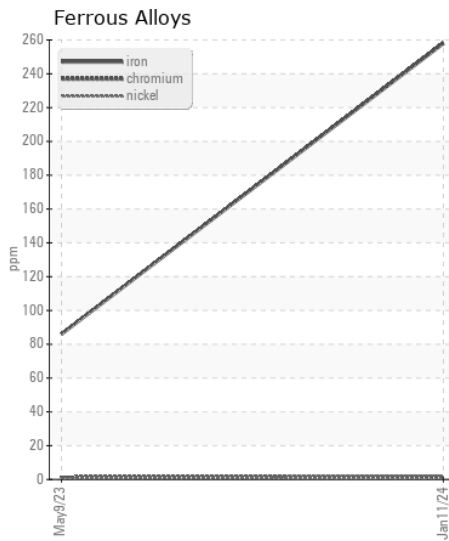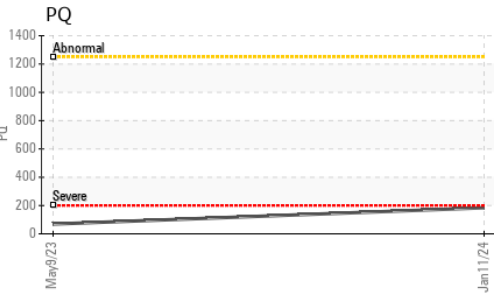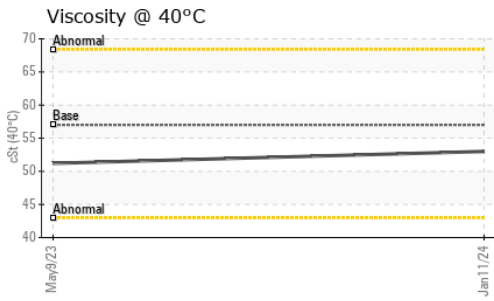

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200168 **Received** : 17 Jan 2024
Lab Number : 06063090 **Diagnosed** : 18 Jan 2024
Unique Number : 10834472 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292