



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[633743 PRIMORIS]
Machine Id
VOLVO A40G 352509
Component
Rear Axle
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP433434	VCP393804	VCP365211
Sample Date		Client Info		16 Nov 2023	25 Apr 2023	16 Aug 2022
Machine Age	hrs	Client Info		5500	4282	3145
Oil Age	hrs	Client Info		1500	3282	500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Changed	Not Changed
Filter Changed		Client Info		Not Changed	Changed	Not Changed
Sample Status				NORMAL	ATTENTION	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>900	69	577	443
Chromium	ppm	ASTM D5185m	>20	<1	7	6
Nickel	ppm	ASTM D5185m	>10	0	2	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	0	<1
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>150	<1	5	3
Tin	ppm	ASTM D5185m	>20	0	0	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	2	6	4
Potassium	ppm	ASTM D5185m	>20	1	3	4
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	MODER	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		0	0	<1
Boron	ppm	ASTM D5185m	111	193	116	169
Barium	ppm	ASTM D5185m	0.0	3	0	0
Molybdenum	ppm	ASTM D5185m	0.9	11	5	5
Manganese	ppm	ASTM D5185m	0.0	3	22	13
Magnesium	ppm	ASTM D5185m	39	42	2	<1
Calcium	ppm	ASTM D5185m	93	120	20	15
Phosphorus	ppm	ASTM D5185m	920	1089	2373	2399
Zinc	ppm	ASTM D5185m	104	63	17	10
Sulfur	ppm	ASTM D5185m	20179	30485	32725	28288
Visc @ 40°C	cSt	ASTM D445	333	251	▲ 51.5	▲ 51.9

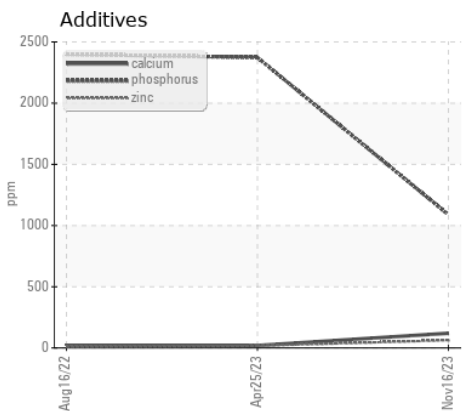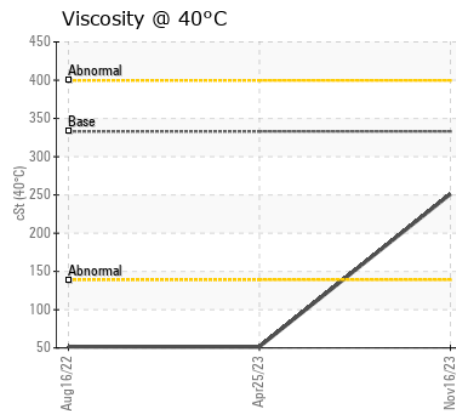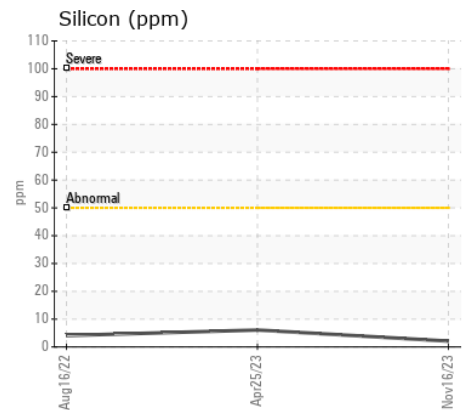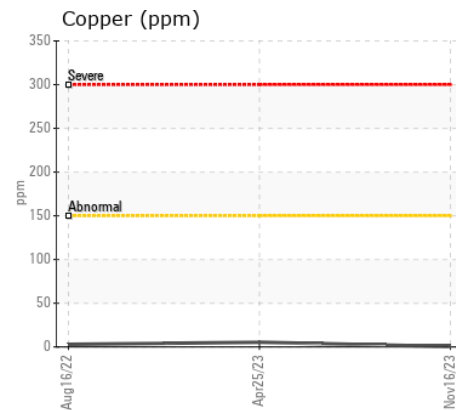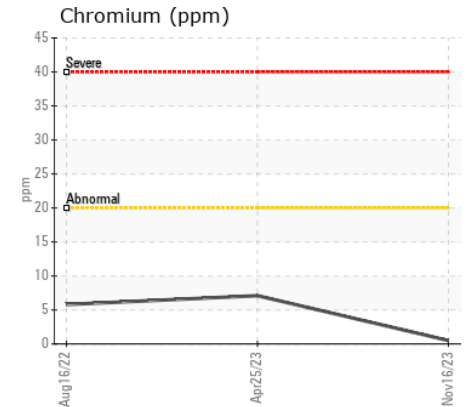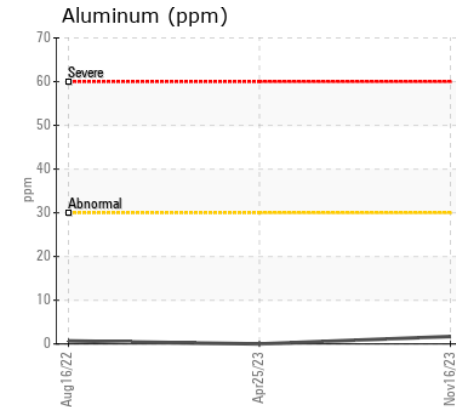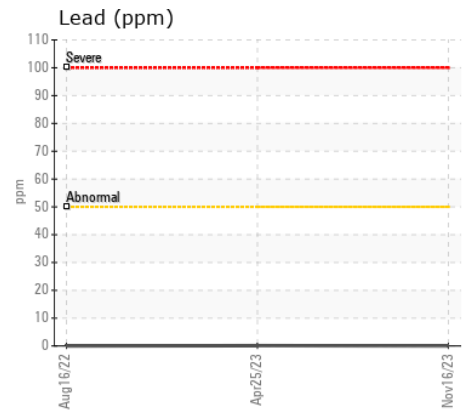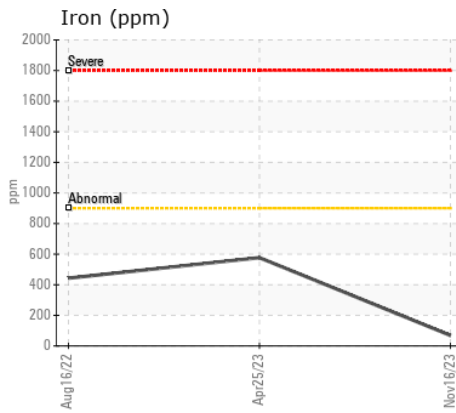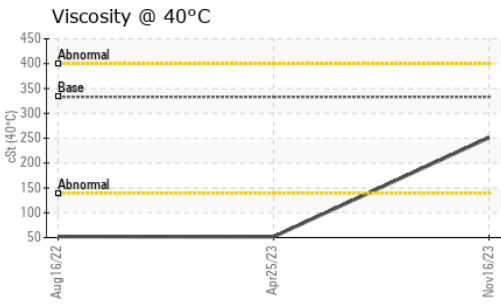

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP433434 **Received** : 17 Jan 2024
Lab Number : 06063127 **Diagnosed** : 18 Jan 2024
Unique Number : 10834509 **Diagnostician** : Wes Davis
Test Package : MOB 1

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC
 8418 PALM RIVER ROAD
 TAMPA, FL
 US 33619
 Contact: KENNY HANEY
 khaney@flaglerce.com
 T: (813)630-0077
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)