



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[634367]
Machine Id
VOLVO A40G 352842
Component
Drop Box
Fluid
VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP442623	VCP420249	VCP389822
Sample Date		Client Info		27 Nov 2023	11 May 2023	13 Oct 2022
Machine Age	hrs	Client Info		4010	3070	1984
Oil Age	hrs	Client Info		4010	3070	1984
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Changed
Filter Changed		Client Info		Changed	Not Changd	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	176	146	128
Chromium	ppm	ASTM D5185m	>20	1	2	1
Nickel	ppm	ASTM D5185m	>10	<1	<1	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	2	0	<1
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>30	28	22	19
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	MODER	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	39	44	44
Potassium	ppm	ASTM D5185m	>20	4	<1	2
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	LIGHT	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	8	6
Boron	ppm	ASTM D5185m	111	84	94	78
Barium	ppm	ASTM D5185m	0.0	3	0	2
Molybdenum	ppm	ASTM D5185m	0.9	8	10	10
Manganese	ppm	ASTM D5185m	0.0	5	6	4
Magnesium	ppm	ASTM D5185m	39	4	6	6
Calcium	ppm	ASTM D5185m	93	43	55	92
Phosphorus	ppm	ASTM D5185m	920	2168	2254	2157
Zinc	ppm	ASTM D5185m	104	57	121	103
Sulfur	ppm	ASTM D5185m	20179	30167	31469	29395
Visc @ 40°C	cSt	ASTM D445	333	51.7	51.7	52.9

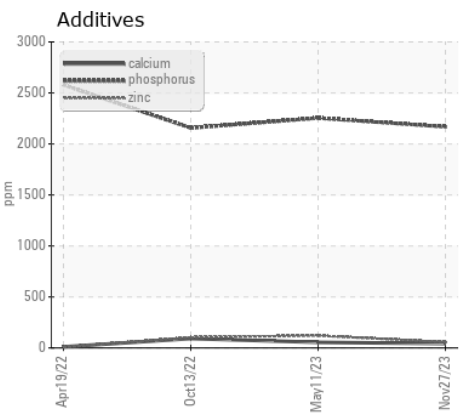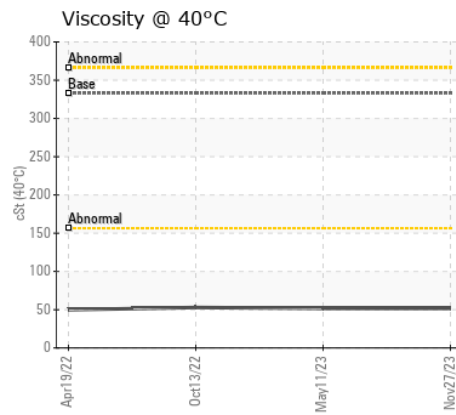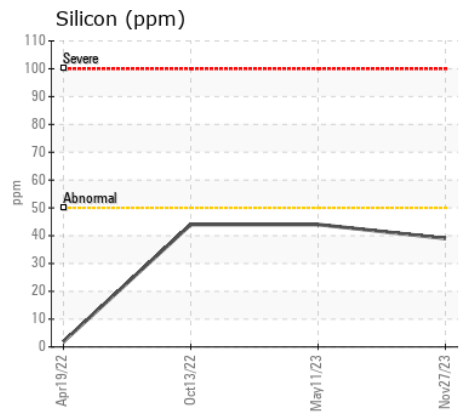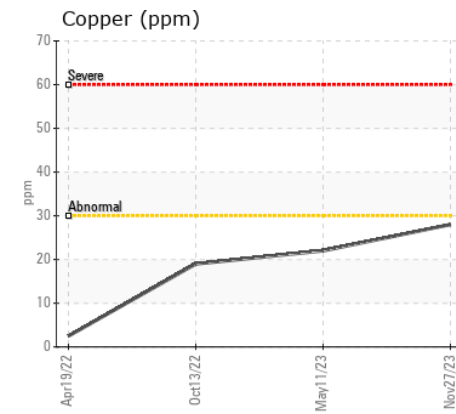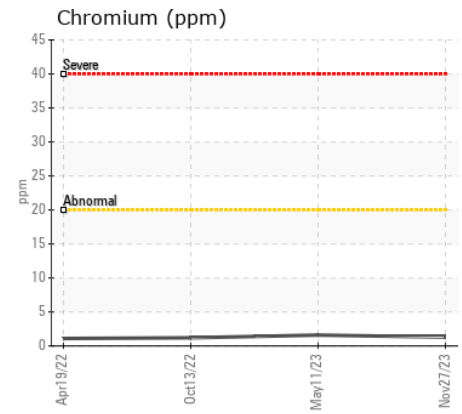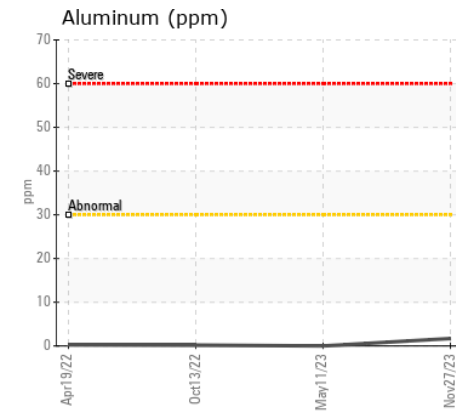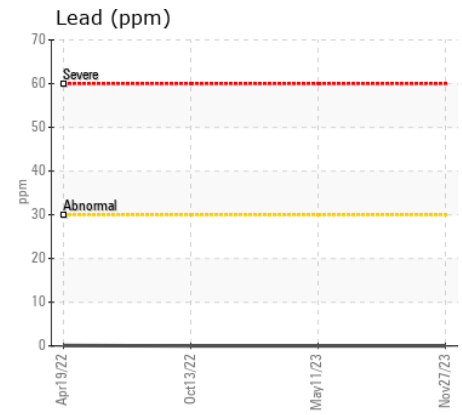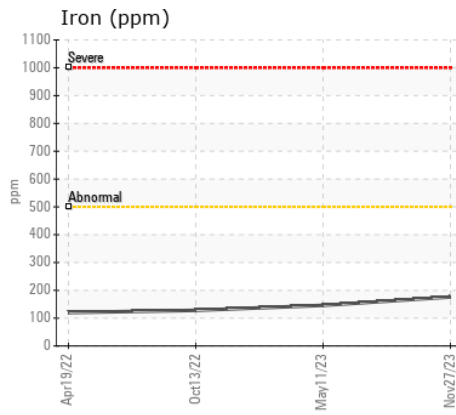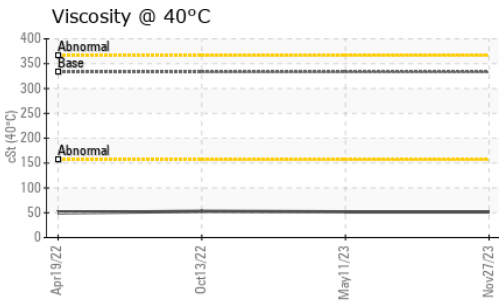

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP442623 **Received** : 17 Jan 2024
Lab Number : 06063132 **Diagnosed** : 18 Jan 2024
Unique Number : 10834514 **Diagnostician** : Wes Davis
Test Package : MOB 1

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

RIPA AND ASSOCIATES
 10149 FISHER AVENUE
 TAMPA, FL
 US 33619

Contact: PM Services
 PMServices@ripaconstruction.com

T:
 F: