



LIEBHERR

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30 1200-72683
Component
Splitter Box
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The oil change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH06063163	LH0235766	LH0217618
Sample Date		Client Info		12 Jan 2024	27 Sep 2023	23 Mar 2023
Machine Age	hrs	Client Info		14822	14243	13667
Oil Age	hrs	Client Info		0	0	1000
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	Changed	N/A
Sample Status				ABNORMAL	SEVERE	ABNORMAL

WEAR

Gear wear is indicated.

Iron	ppm	ASTM D5185m	>100	▲ 132	● 887	▲ 115
Chromium	ppm	ASTM D5185m	>5	<1	● 12	1
Nickel	ppm	ASTM D5185m	>5	0	1	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	▲ 10	2
Lead	ppm	ASTM D5185m	>30	0	0	0
Copper	ppm	ASTM D5185m	>20	<1	3	1
Tin	ppm	ASTM D5185m	>10	0	0	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	MODER
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>30	9	▲ 41	14
Potassium	ppm	ASTM D5185m	>20	2	4	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	3	<1
Boron	ppm	ASTM D5185m	400	<1	2	3
Barium	ppm	ASTM D5185m	200	3	0	0
Molybdenum	ppm	ASTM D5185m	12	<1	2	1
Manganese	ppm	ASTM D5185m		1	9	3
Magnesium	ppm	ASTM D5185m	12	9	19	13
Calcium	ppm	ASTM D5185m	150	43	167	53
Phosphorus	ppm	ASTM D5185m	1650	395	472	336
Zinc	ppm	ASTM D5185m	125	25	72	57
Sulfur	ppm	ASTM D5185m	22500	15121	12560	17043
Visc @ 40°C	cSt	ASTM D445	143	114	106	▲ 74.0


▲ Ferrous Alloys

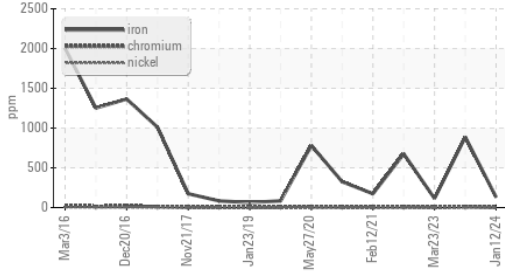


Viscosity @ 40°C

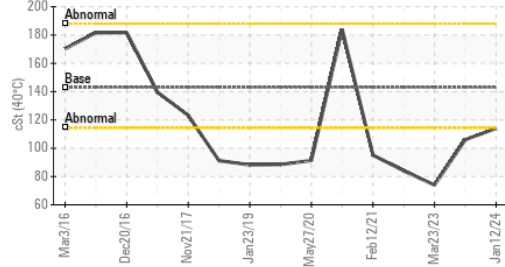


▲ Iron (ppm)

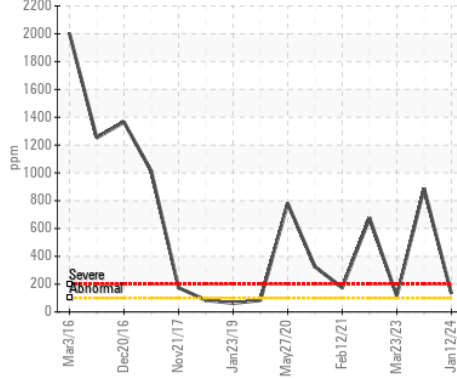


Aluminum (ppm)

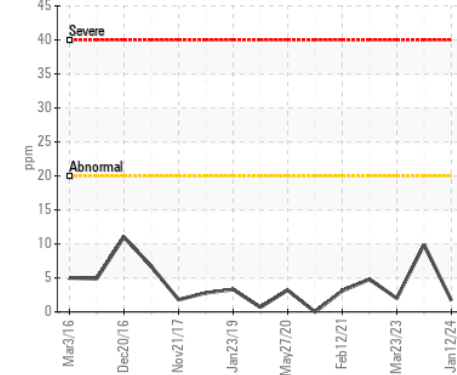


Copper (ppm)

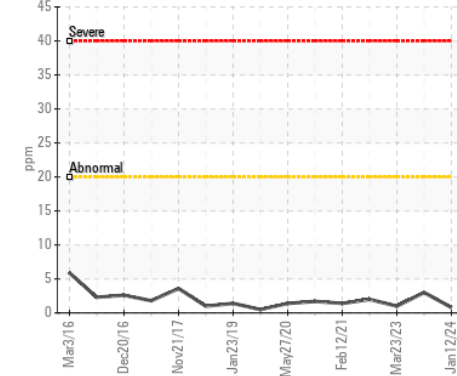


Viscosity @ 40°C

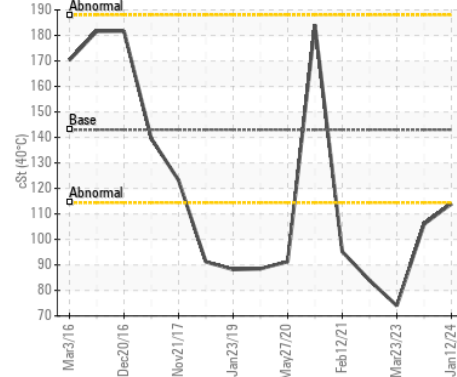


Lead (ppm)

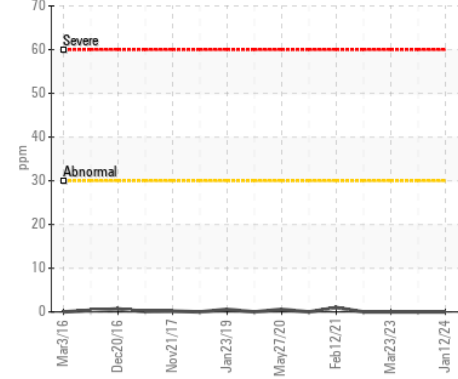


Chromium (ppm)

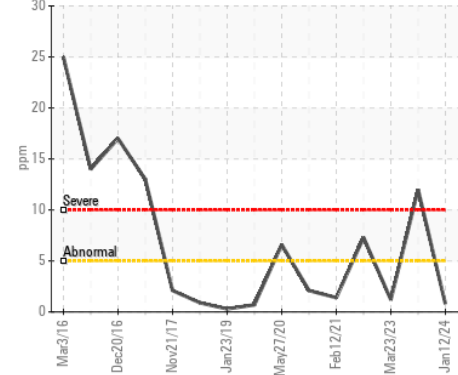

Silicon (ppm)

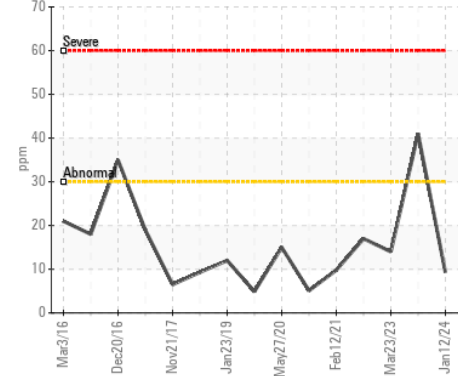

Additives

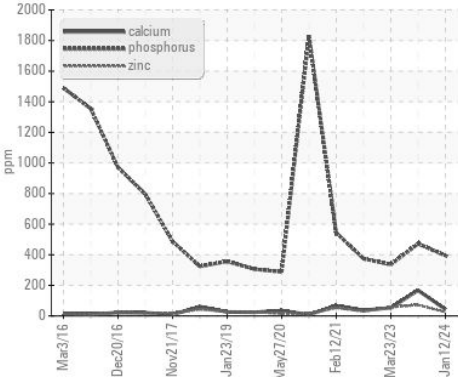

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH06063163 **Received** : 17 Jan 2024
Lab Number : 06063163 **Diagnosed** : 19 Jan 2024
Unique Number : 10834545 **Diagnostician** : Sean Felton
Test Package : MOB 1

SPARTAN RECYCLING
 3071 HOWARD ST
 SPARTANBURG, SC
 US 29303
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: