



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR LH30M 117414-1253
Component
Rear Left Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0272897	LH0235755	LH0217608
Sample Date		Client Info		10 Jan 2024	26 Sep 2023	14 Jul 2022
Machine Age	hrs	Client Info		8285	7700	0
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		N/A	Not Changed	N/A
Sample Status				NORMAL	NORMAL	ABNORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>450	17	45	▲ 547
Chromium	ppm	ASTM D5185m	>4	<1	<1	2
Nickel	ppm	ASTM D5185m	>2	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	<1	1
Lead	ppm	ASTM D5185m	>4	0	0	0
Copper	ppm	ASTM D5185m	>75	1	4	4
Tin	ppm	ASTM D5185m		0	0	<1
Vanadium	ppm	ASTM D5185m		0	<1	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	2	5	11
Potassium	ppm	ASTM D5185m	>20	1	2	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	0	4	4
Boron	ppm	ASTM D5185m	400	1	14	3
Barium	ppm	ASTM D5185m	200	3	0	0
Molybdenum	ppm	ASTM D5185m	12	1	4	<1
Manganese	ppm	ASTM D5185m		0	<1	4
Magnesium	ppm	ASTM D5185m	12	6	18	5
Calcium	ppm	ASTM D5185m	150	67	217	25
Phosphorus	ppm	ASTM D5185m	1650	364	426	260
Zinc	ppm	ASTM D5185m	125	0	99	17
Sulfur	ppm	ASTM D5185m	22500	17720	17357	13734
Visc @ 40°C	cSt	ASTM D445	143	121	97.2	95.0

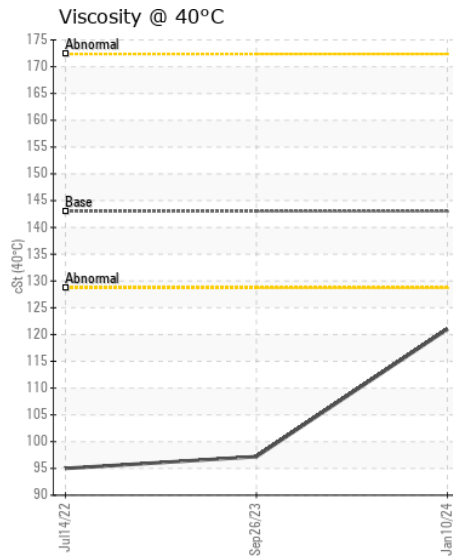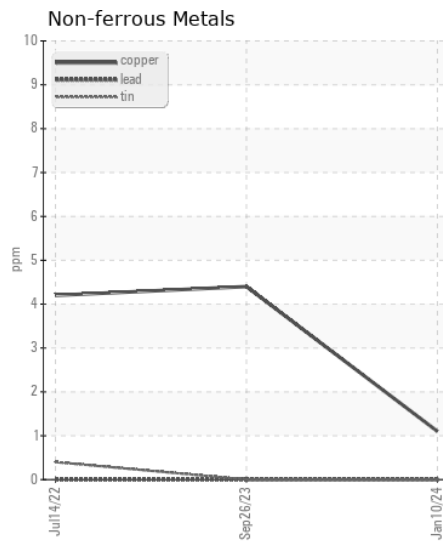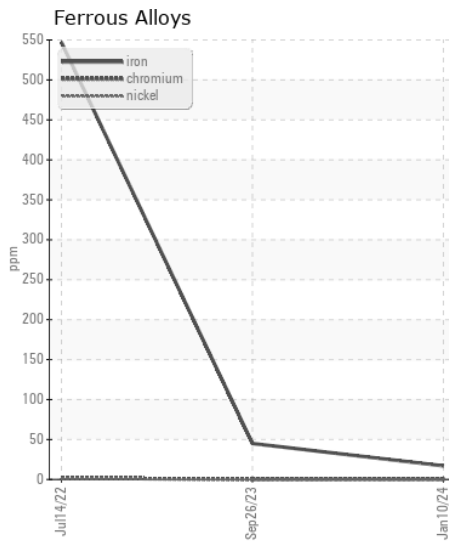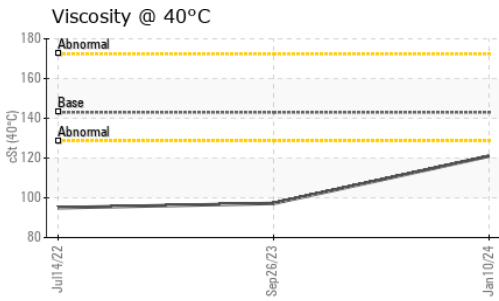

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0272897 **Received** : 17 Jan 2024
Lab Number : 06063172 **Diagnosed** : 18 Jan 2024
Unique Number : 10834554 **Diagnostician** : Wes Davis
Test Package : CONST

SPARTAN RECYCLING
 3071 HOWARD ST
 SPARTANBURG, SC
 US 29303

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: