



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR LH30M 1253-123497**  
Component  
**Rear Left Wheel Hub**  
Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0272907</b>	LH0212313	---
Sample Date		Client Info		<b>11 Jan 2024</b>	30 Dec 2021	---
Machine Age	hrs	Client Info		<b>4554</b>	981	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	None	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>450	<b>9</b>	10	---
Chromium	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>0</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>15	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>4	<b>0</b>	<1	---
Copper	ppm	ASTM D5185m	>75	<b>&lt;1</b>	2	---
Tin	ppm	ASTM D5185m		<b>0</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	LIGHT	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>60	<b>&lt;1</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	<b>0</b>	2	---
Boron	ppm	ASTM D5185m	400	<b>3</b>	77	---
Barium	ppm	ASTM D5185m	200	<b>3</b>	0	---
Molybdenum	ppm	ASTM D5185m	12	<b>0</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m	12	<b>1</b>	<1	---
Calcium	ppm	ASTM D5185m	150	<b>56</b>	285	---
Phosphorus	ppm	ASTM D5185m	1650	<b>346</b>	468	---
Zinc	ppm	ASTM D5185m	125	<b>0</b>	152	---
Sulfur	ppm	ASTM D5185m	22500	<b>18090</b>	20929	---
Visc @ 40°C	cSt	ASTM D445	143	<b>119</b>	112	---

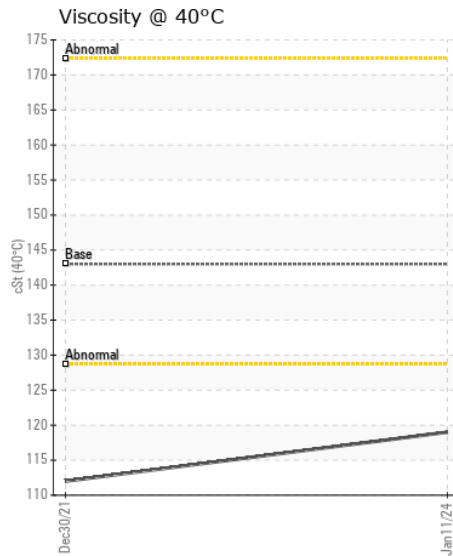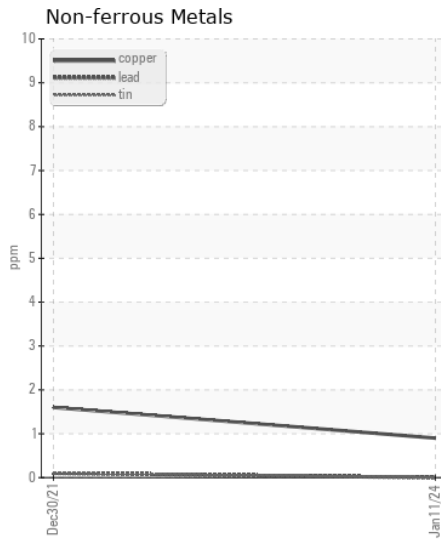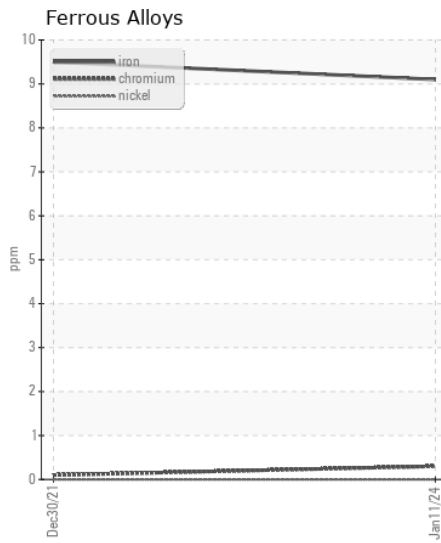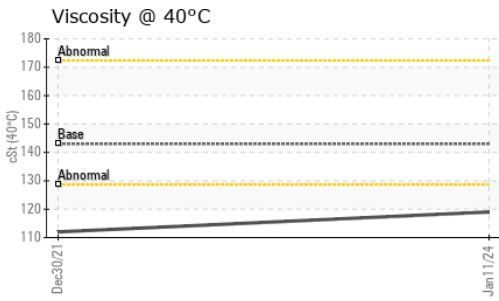

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LH0272907 **Recieved** : 17 Jan 2024  
**Lab Number** : 06063177 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10834559 **Diagnostician** : Don Baldridge  
**Test Package** : CONST

**SPARTAN RECYCLING**  
 3071 HOWARD ST  
 SPARTANBURG, SC  
 US 29303

Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: