



LIEBHERR

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Machine Id
LIEBHERR LH30 101514-1253
Component
Rear Right Wheel Hub
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number | | Client Info | | LH0272803 | LH0235745 | LH0217625 |
| Sample Date | | Client Info | | 10 Jan 2024 | 25 Sep 2023 | 22 Mar 2023 |
| Machine Age | hrs | Client Info | | 12010 | 11543 | 10552 |
| Oil Age | hrs | Client Info | | 0 | 0 | 2000 |
| Filter Age | hrs | Client Info | | 0 | 0 | 0 |
| Oil Changed | | Client Info | | Changed | Changed | Changed |
| Filter Changed | | Client Info | | N/A | Not Changed | N/A |
| Sample Status | | | | NORMAL | NORMAL | ATTENTION |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|------|------|
| Iron | ppm | ASTM D5185m | >450 | 147 | 106 | 59 |
| Chromium | ppm | ASTM D5185m | >4 | <1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >15 | 2 | <1 | 6 |
| Lead | ppm | ASTM D5185m | >4 | 0 | 0 | 0 |
| Copper | ppm | ASTM D5185m | >75 | <1 | 2 | <1 |
| Tin | ppm | ASTM D5185m | | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | 0 | <1 | 0 |
| White Metal | scalar | *Visual | NONE | LIGHT | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE | NONE |

CONTAMINATION





There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|--------|-------------|-------|--------------|-------|-------|
| Silicon | ppm | ASTM D5185m | >60 | 3 | 3 | 25 |
| Potassium | ppm | ASTM D5185m | >20 | 2 | 1 | 2 |
| Water | | WC Method | >0.2 | NEG | NEG | NEG |
| Silt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG | NEG |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|-------------|-----|-------------|-------|--------------|-------|--------|
| Sodium | ppm | ASTM D5185m | >170 | 2 | <1 | 2 |
| Boron | ppm | ASTM D5185m | 400 | 0 | 0 | 4 |
| Barium | ppm | ASTM D5185m | 200 | 3 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 12 | <1 | 1 | 1 |
| Manganese | ppm | ASTM D5185m | | <1 | 1 | 1 |
| Magnesium | ppm | ASTM D5185m | 12 | 7 | 8 | 7 |
| Calcium | ppm | ASTM D5185m | 150 | 67 | 71 | 32 |
| Phosphorus | ppm | ASTM D5185m | 1650 | 437 | 304 | 294 |
| Zinc | ppm | ASTM D5185m | 125 | <1 | 33 | 17 |
| Sulfur | ppm | ASTM D5185m | 22500 | 18445 | 15322 | 16902 |
| Visc @ 40°C | cSt | ASTM D445 | 143 | 130 | 104 | ▲ 74.0 |

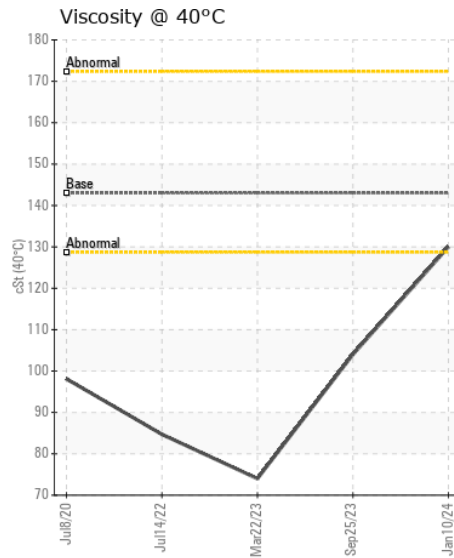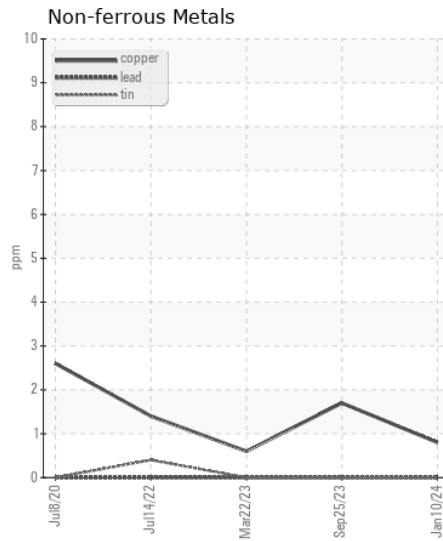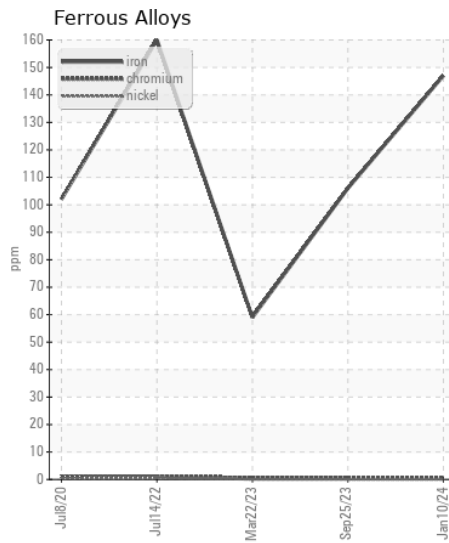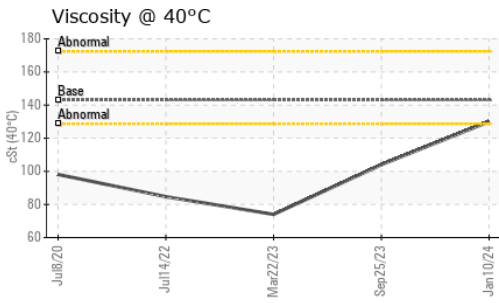

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0272803 **Received** : 17 Jan 2024
Lab Number : 06063179 **Diagnosed** : 18 Jan 2024
Unique Number : 10834561 **Diagnostician** : Wes Davis
Test Package : CONST

SPARTAN RECYCLING
 3071 HOWARD ST
 SPARTANBURG, SC
 US 29303
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: