



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area  
**DUTTON [DUTTON]**  
Machine Id  
**VOLVO PENTA 2013355960**  
Component  
**Port Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (12 GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA039821	---	---
Sample Date		Client Info		12 Jan 2024	---	---
Machine Age	hrs	Client Info		939	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>80	2	---	---
Chromium	ppm	ASTM D5185m	>6	0	---	---
Nickel	ppm	ASTM D5185m	>2	<1	---	---
Titanium	ppm	ASTM D5185m	>2	0	---	---
Silver	ppm	ASTM D5185m	>2	<1	---	---
Aluminum	ppm	ASTM D5185m	>20	2	---	---
Lead	ppm	ASTM D5185m	>95	<1	---	---
Copper	ppm	ASTM D5185m	>85	<1	---	---
Tin	ppm	ASTM D5185m	>9	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

**CONTAMINATION**












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	6	---	---
Potassium	ppm	ASTM D5185m	>20	16	---	---
Fuel		WC Method	>4.0	<1.0	---	---
Water		WC Method	>0.1	NEG	---	---
Glycol	%	*ASTM D2982		NEG	---	---
Soot %	%	*ASTM D7844		0.3	---	---
Nitration	Abs/cm	*ASTM D7624	>20	5.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	18.8	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

**FLUID CONDITION**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>216	11	---	---
Boron	ppm	ASTM D5185m	250	237	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	100	78	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	450	458	---	---
Calcium	ppm	ASTM D5185m	3000	1429	---	---
Phosphorus	ppm	ASTM D5185m	1150	1078	---	---
Zinc	ppm	ASTM D5185m	1350	1255	---	---
Sulfur	ppm	ASTM D5185m	4250	3377	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.6	---	---
Visc @ 100°C	cSt	ASTM D445	14.4	13.3	---	---

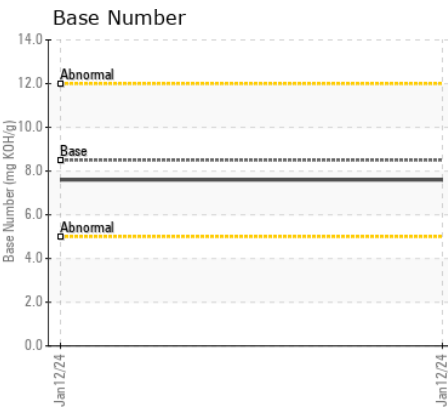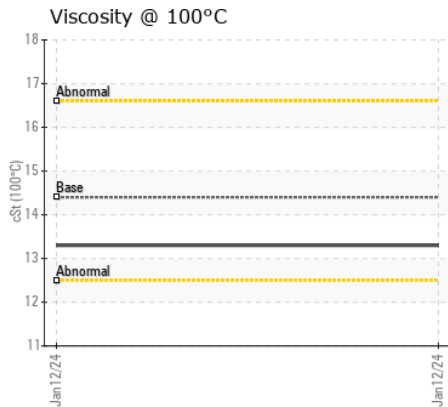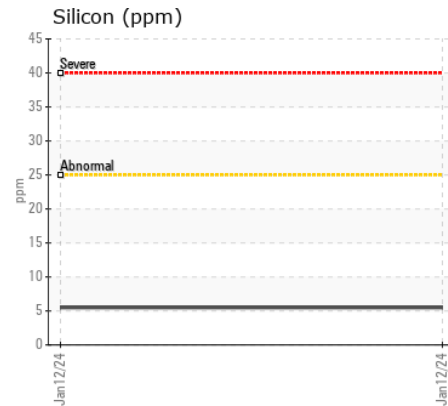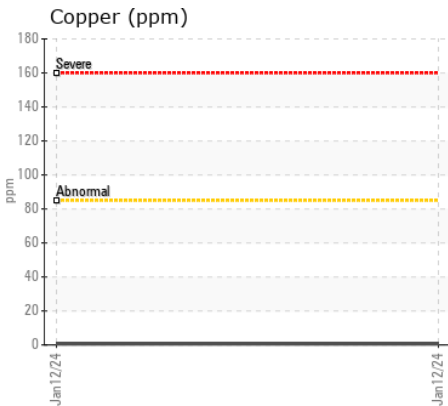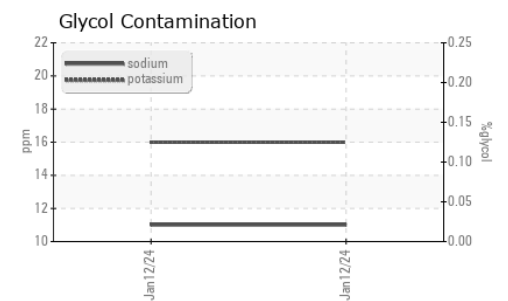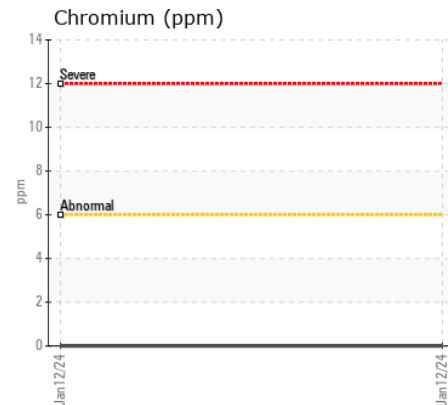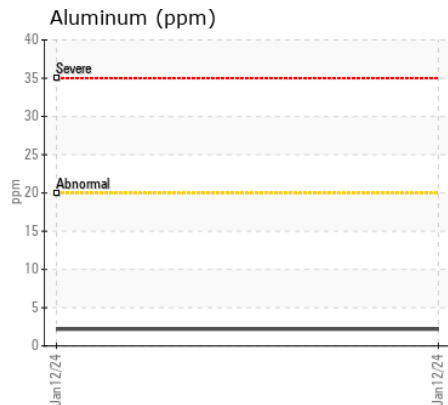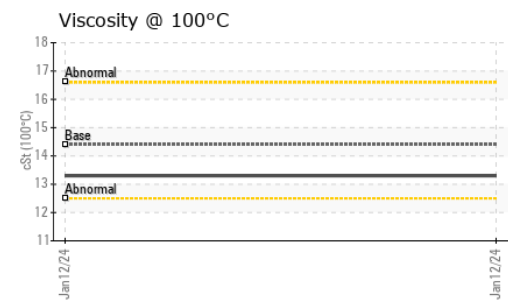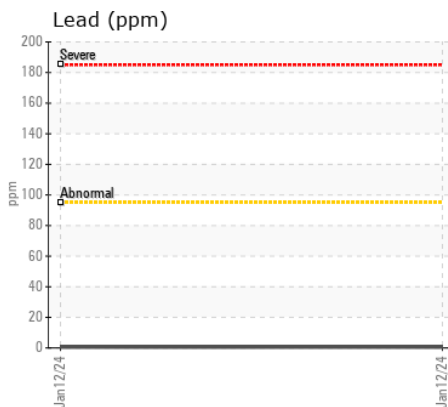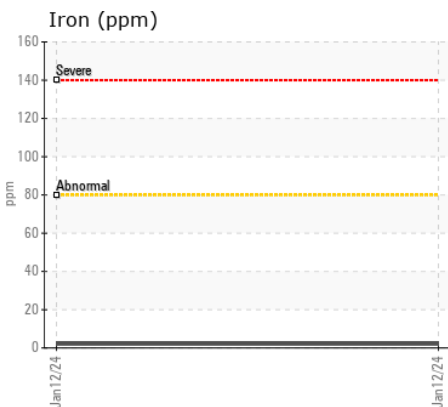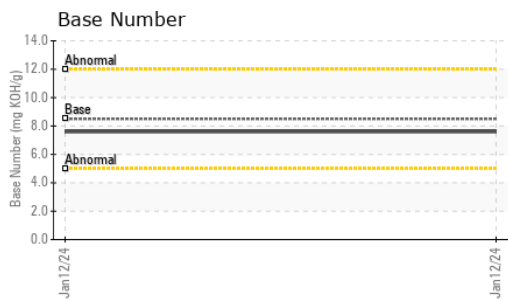

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VPA039821 **Received** : 17 Jan 2024  
**Lab Number** : 06063264 **Diagnosed** : 19 Jan 2024  
**Unique Number** : 10834646 **Diagnostician** : Don Baldrige  
**Test Package** : MOB 1 ( Additional Tests: Glycol, TBN )

**Suncoast Diesel Marine Inc.**  
 610 Mount Vernan St  
 OLDSMAR, FL  
 US 34677  
 Contact: MARK WARREN  
 oldsmar@suncoastdmi.com  
 T: (813)475-5942  
 F: (813)475-5943

*To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)*