



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[05W44323]

Machine Id

JOHN DEERE 850L 1T0850LXVPF446530

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199100	JR0183990	---
Sample Date		Client Info		15 Jan 2024	28 Aug 2023	---
Machine Age	hrs	Client Info		983	474	---
Oil Age	hrs	Client Info		509	0	---
Filter Age	hrs	Client Info		509	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	46	56	---
Chromium	ppm	ASTM D5185m	>11	1	1	---
Nickel	ppm	ASTM D5185m	>5	22	7	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	3	---
Lead	ppm	ASTM D5185m	>26	1	5	---
Copper	ppm	ASTM D5185m	>26	10	69	---
Tin	ppm	ASTM D5185m	>4	1	3	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	8	10	---
Potassium	ppm	ASTM D5185m	>20	1	7	---
Fuel		WC Method	>2.1	<1.0	0.2	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.6	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	9.2	8.7	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.6	22.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	8	---
Boron	ppm	ASTM D5185m		195	222	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		261	275	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m		819	913	---
Calcium	ppm	ASTM D5185m		1447	1648	---
Phosphorus	ppm	ASTM D5185m		953	925	---
Zinc	ppm	ASTM D5185m		1129	1173	---
Sulfur	ppm	ASTM D5185m		2994	3648	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.2	17.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.9	8.5	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	▲ 10.3	---

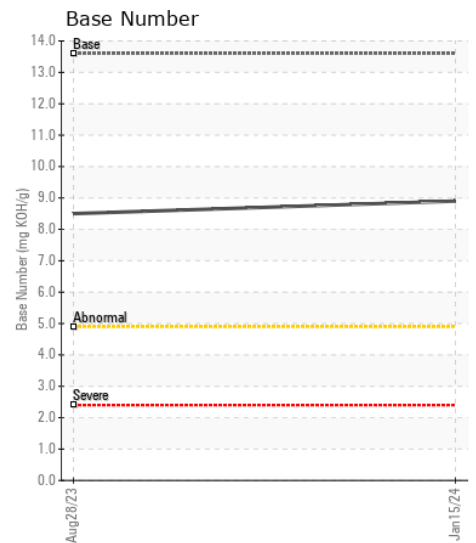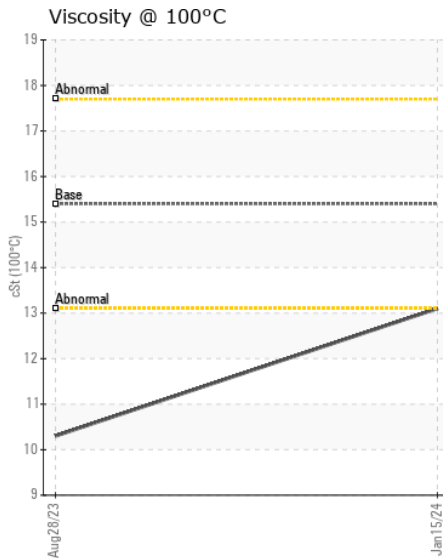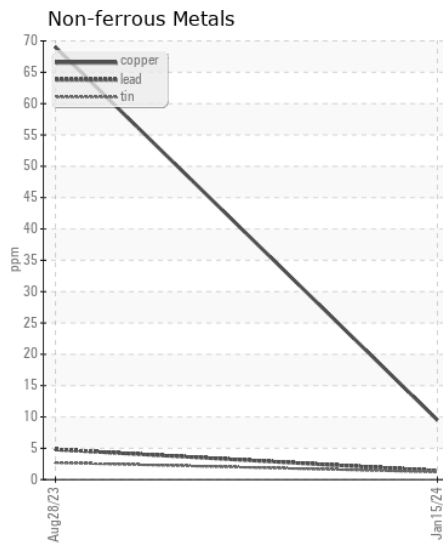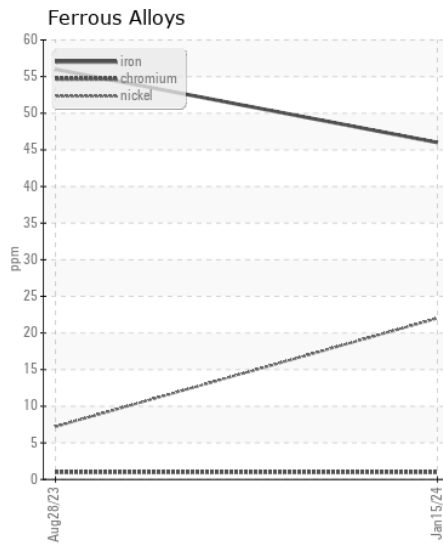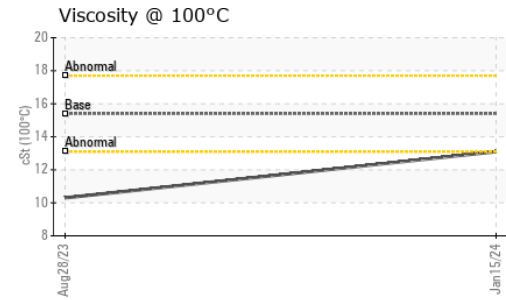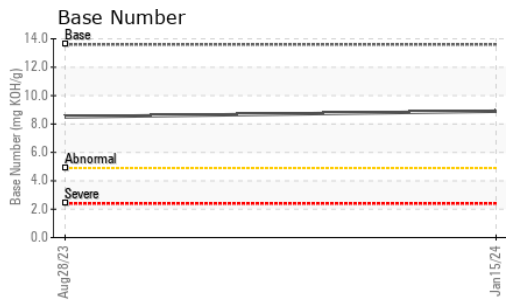

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199100 **Received** : 17 Jan 2024
Lab Number : 06063290 **Diagnosed** : 18 Jan 2024
Unique Number : 10834672 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

B & S SITE DEVELOPMENT
 7800 PINEY BRANCH LANE
 BRISTOW, VA
 US 20136
 Contact: DANNY HUFF
 dhuff@bandssite.com
 T: (540)270-3203
 F: (703)753-0605

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)