



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W19966]

Machine Id

JOHN DEERE 5115R 1LV5115RKNN431190

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0200832	---	---
Sample Date		Client Info		16 Jan 2024	---	---
Machine Age	hrs	Client Info		339	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	10	---	---
Chromium	ppm	ASTM D5185m	>11	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m	>3	0	---	---
Aluminum	ppm	ASTM D5185m	>31	5	---	---
Lead	ppm	ASTM D5185m	>26	1	---	---
Copper	ppm	ASTM D5185m	>26	5	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	---	---
Potassium	ppm	ASTM D5185m	>20	1	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.1	---	---
Nitration	Abs/cm	*ASTM D7624	>20	7.9	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	---	---
Boron	ppm	ASTM D5185m		249	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		251	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		824	---	---
Calcium	ppm	ASTM D5185m		1352	---	---
Phosphorus	ppm	ASTM D5185m		937	---	---
Zinc	ppm	ASTM D5185m		1088	---	---
Sulfur	ppm	ASTM D5185m		3030	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.9	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.8	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	---	---

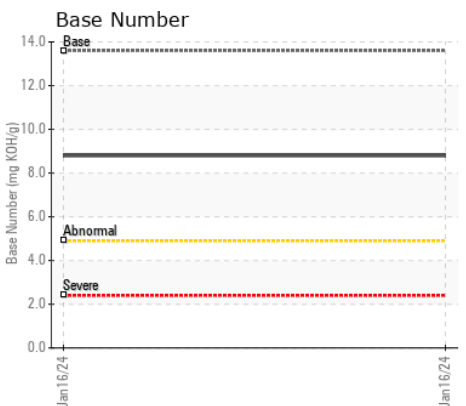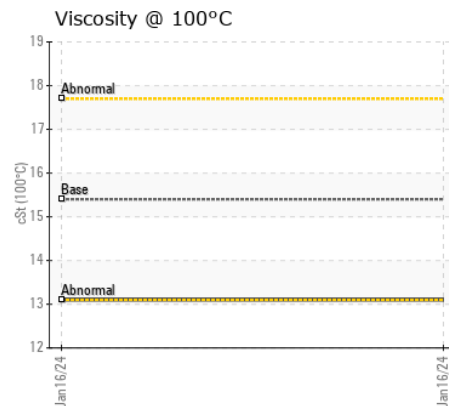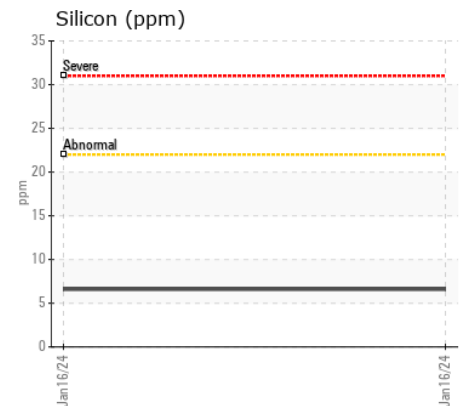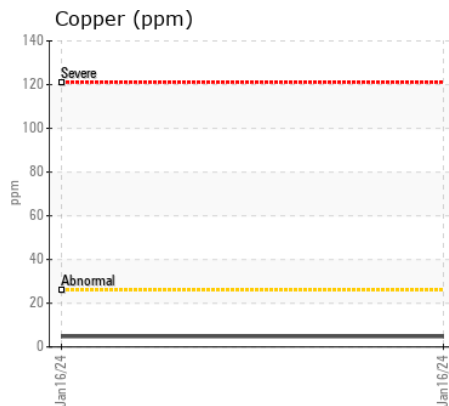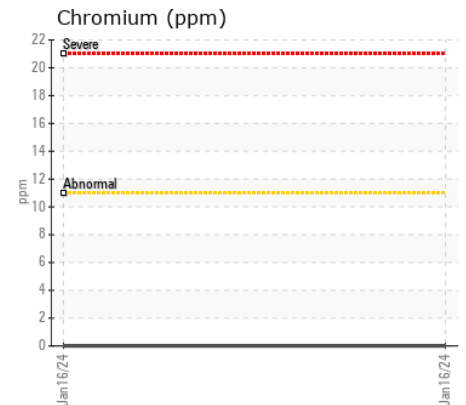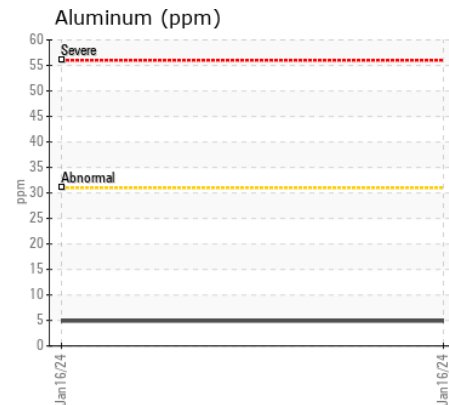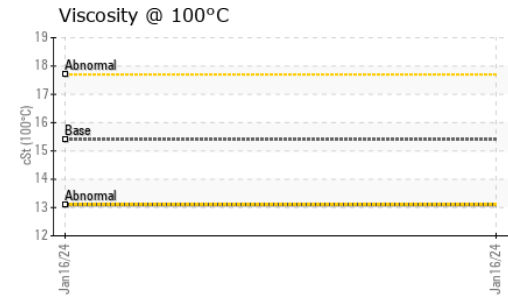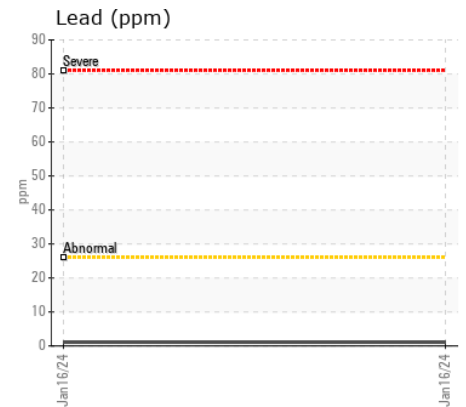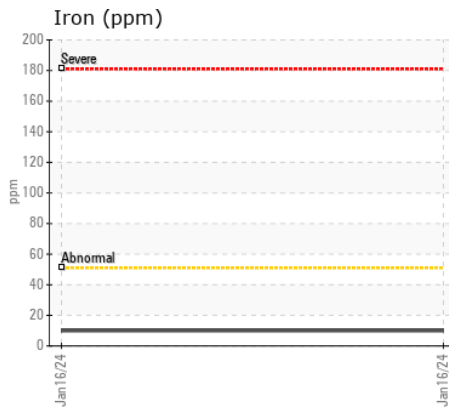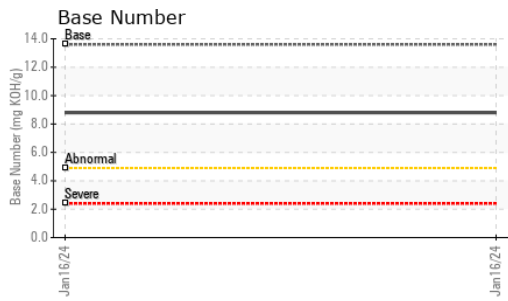

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0200832 **Received** : 17 Jan 2024
Lab Number : 06063294 **Diagnosed** : 18 Jan 2024
Unique Number : 10834676 **Diagnostician** : Wes Davis
Test Package : MOBCE (Additional Tests: TBN)

JRE - SHELBY
 703 N POST RD
 SHELBY, NC
 US 28150
 Contact: LEVI BOWMAN
 levi.bowman@jamesriverequipment.com
 T:
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)