



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 5705E 42000611 (S/N 1PY5075ELKK409754)

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0189786	JR0093321	---
Sample Date		Client Info		11 Jan 2024	23 May 2022	---
Machine Age	hrs	Client Info		218	113	---
Oil Age	hrs	Client Info		218	113	---
Filter Age	hrs	Client Info		218	113	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ATTENTION	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	9	23	---
Chromium	ppm	ASTM D5185m	>11	<1	2	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	4	3	---
Lead	ppm	ASTM D5185m	>26	2	6	---
Copper	ppm	ASTM D5185m	>26	3	23	---
Tin	ppm	ASTM D5185m	>4	<1	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	22	---
Potassium	ppm	ASTM D5185m	>20	1	3	---
Fuel		WC Method	>2.1	<1.0	0.8	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.1	0.1	---
Nitration	Abs/cm	*ASTM D7624	>20	7.1	7.9	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	20.6	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	1	6	---
Boron	ppm	ASTM D5185m		257	275	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		247	260	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		812	791	---
Calcium	ppm	ASTM D5185m		1332	1395	---
Phosphorus	ppm	ASTM D5185m		953	936	---
Zinc	ppm	ASTM D5185m		1088	1085	---
Sulfur	ppm	ASTM D5185m		3096	3773	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.5	16.6	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	10.0	9.9	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	▲ 10.7	---

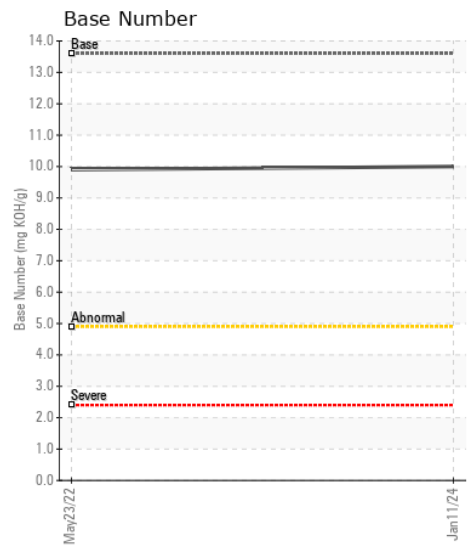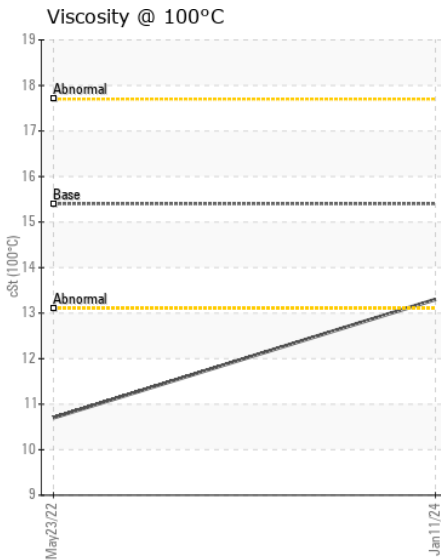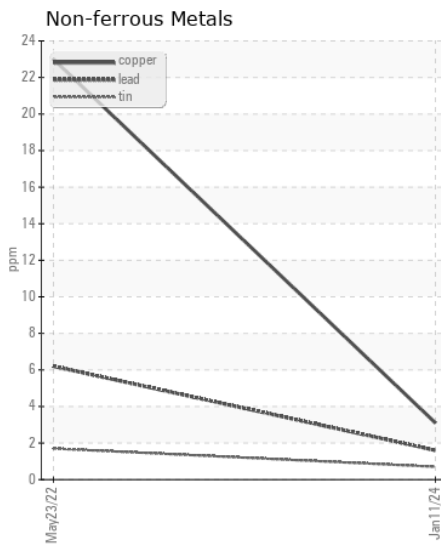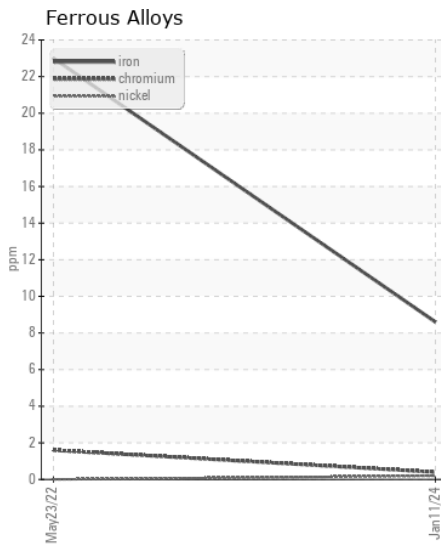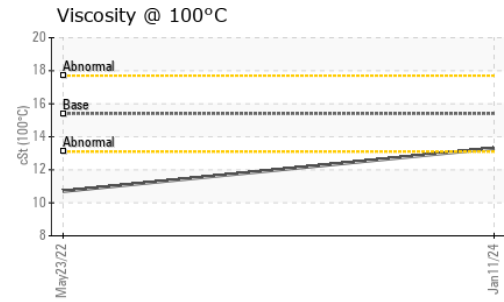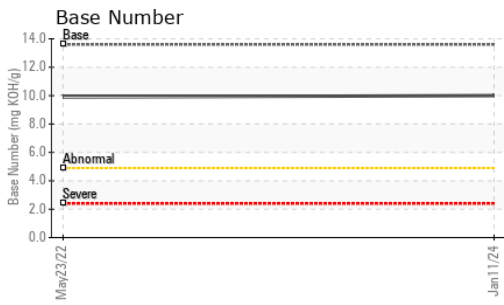

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0189786 **Received** : 17 Jan 2024
Lab Number : 06063296 **Diagnosed** : 18 Jan 2024
Unique Number : 10834678 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: TBN)

JRE - LA CROSSE
 38431 HWY 58
 LA CROSSE, VA
 US 23950-1807

Contact: HUNTER GREEN
 hgreen@jamesriverequipment.com
 T: (434)447-4325
 F: (434)447-1329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)