



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id  
**JOHN DEERE 5075 1PY5075ELNN418117**  
 Component  
**Diesel Engine**  
 Fluid  
**JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- QTS)**

### RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0189785</b>	---	---
Sample Date		Client Info		<b>12 Jan 2024</b>	---	---
Machine Age	hrs	Client Info		<b>165</b>	---	---
Oil Age	hrs	Client Info		<b>165</b>	---	---
Filter Age	hrs	Client Info		<b>165</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	<b>30</b>	---	---
Chromium	ppm	ASTM D5185m	>11	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>31	<b>5</b>	---	---
Lead	ppm	ASTM D5185m	>26	<b>6</b>	---	---
Copper	ppm	ASTM D5185m	>26	<b>12</b>	---	---
Tin	ppm	ASTM D5185m	>4	<b>3</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

### CONTAMINATION

Fuel content negligible. There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>22	<b>25</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---
Fuel	%	ASTM D3524	>2.1	<b>0.4</b>	---	---
Water		WC Method	>0.21	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.7</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.7</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.21	<b>NEG</b>	---	---

### FLUID CONDITION


The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

Sodium	ppm	ASTM D5185m	>31	<b>5</b>	---	---
Boron	ppm	ASTM D5185m		<b>261</b>	---	---
Barium	ppm	ASTM D5185m		<b>1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>256</b>	---	---
Manganese	ppm	ASTM D5185m		<b>4</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>821</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1325</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>952</b>	---	---
Zinc	ppm	ASTM D5185m		<b>1078</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>3153</b>	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.3</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	<b>10.0</b>	---	---
Visc @ 100°C	cSt	ASTM D445	15.4	<b>▲ 10.7</b>	---	---


▲ Viscosity @ 100°C

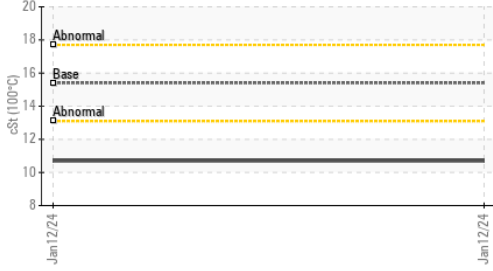


Fuel Dilution

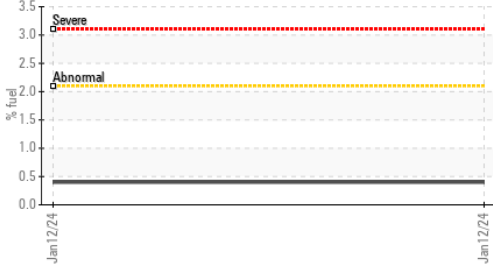


Base Number

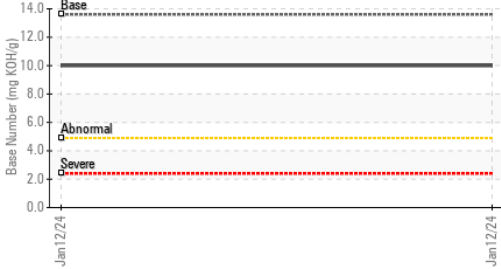


Ferrous Alloys

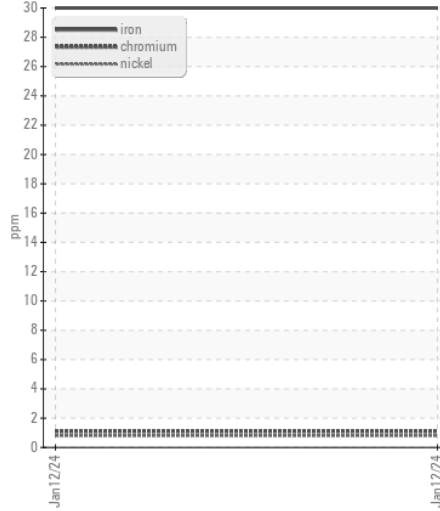


Non-ferrous Metals

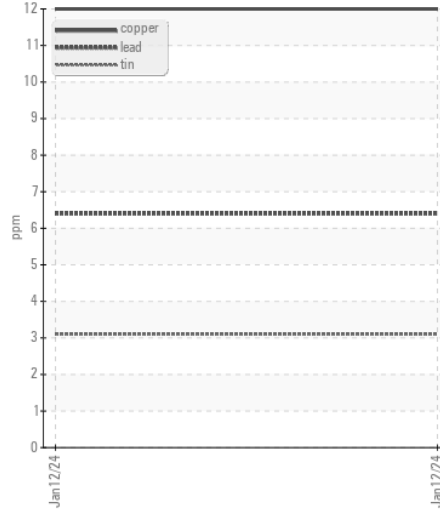

▲ Viscosity @ 100°C

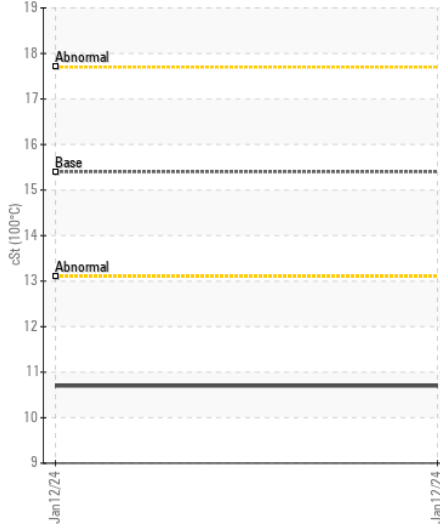

Base Number

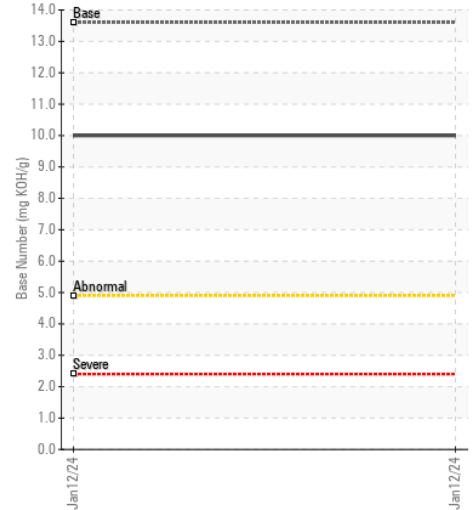

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0189785 **Received** : 17 Jan 2024  
**Lab Number** : 06063297 **Diagnosed** : 24 Jan 2024  
**Unique Number** : 10834679 **Diagnostician** : Angela Borella  
**Test Package** : CONST ( Additional Tests: FuelDilution, PercentFuel, TBN )

**JRE - LA CROSSE**  
 38431 HWY 58  
 LA CROSSE, VA  
 US 23950-1807

Contact: HUNTER GREEN  
 hgreen@jamesriverequipment.com  
 T: (434)447-4325  
 F: (434)447-1329

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)