



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 6175R NUTRIDENSE 6175R (S/N 1RW6175RLGD026055)

Component
Front Center Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (6 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0106790	JR0125062	---
Sample Date		Client Info		12 Jan 2024	04 May 2023	---
Machine Age	hrs	Client Info		2297	0	---
Oil Age	hrs	Client Info		500	500	---
Filter Age	hrs	Client Info		500	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	SEVERE	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	35	233	---
Chromium	ppm	ASTM D5185m	>11	2	12	---
Nickel	ppm	ASTM D5185m	>5	5	30	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	13	---
Lead	ppm	ASTM D5185m	>26	<1	0	---
Copper	ppm	ASTM D5185m	>26	4	7	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	8	9	---
Potassium	ppm	ASTM D5185m	>20	1	6	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.5	---
Nitration	Abs/cm	*ASTM D7624	>20	8.0	9.2	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.2	25.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	2	4	---
Boron	ppm	ASTM D5185m		224	41	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		246	36	---
Manganese	ppm	ASTM D5185m		<1	4	---
Magnesium	ppm	ASTM D5185m		811	125	---
Calcium	ppm	ASTM D5185m		1349	2047	---
Phosphorus	ppm	ASTM D5185m		935	924	---
Zinc	ppm	ASTM D5185m		1088	1172	---
Sulfur	ppm	ASTM D5185m		3022	4064	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	7.2	3.7	---
Visc @ 100°C	cSt	ASTM D445	15.4	14.0	13.6	---

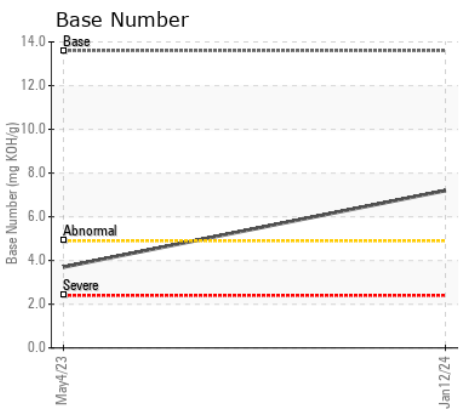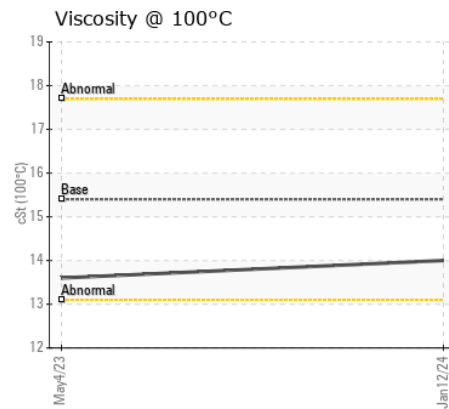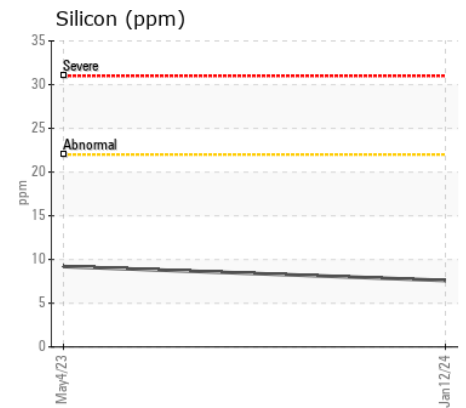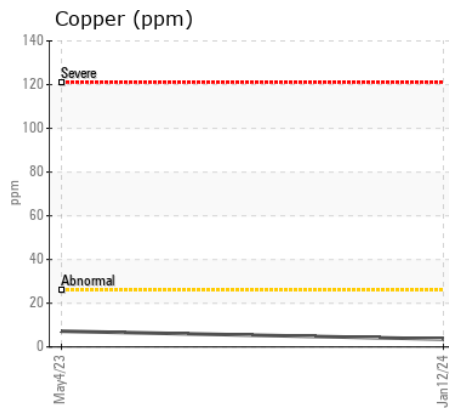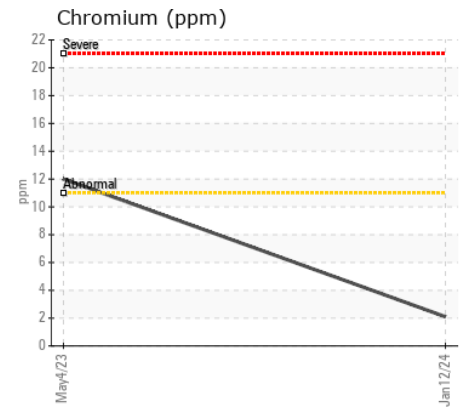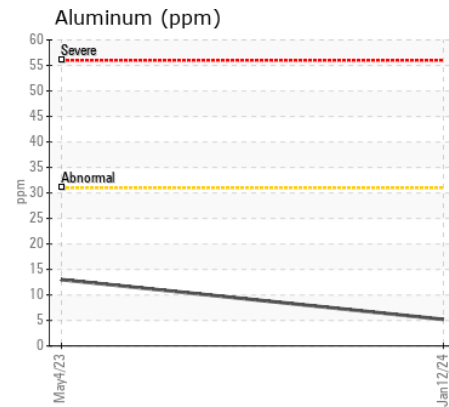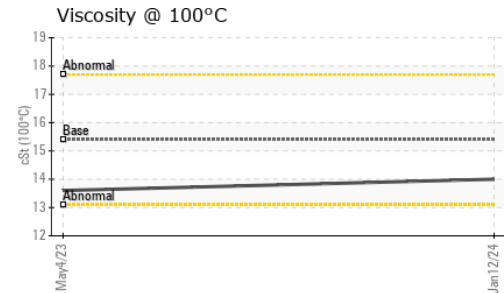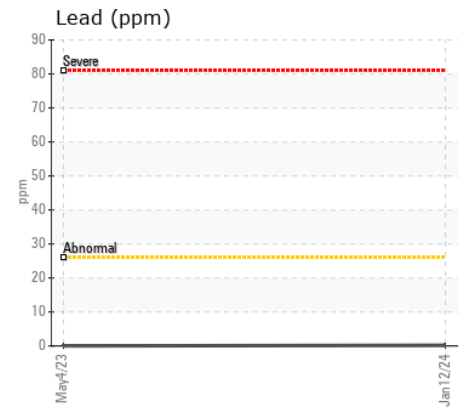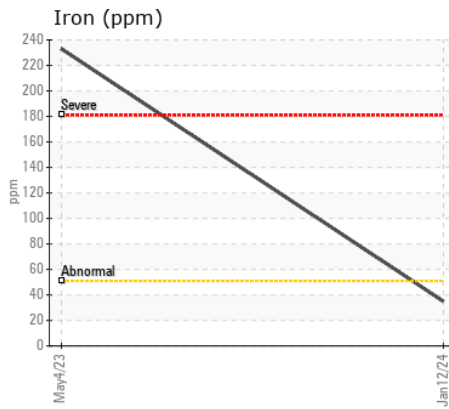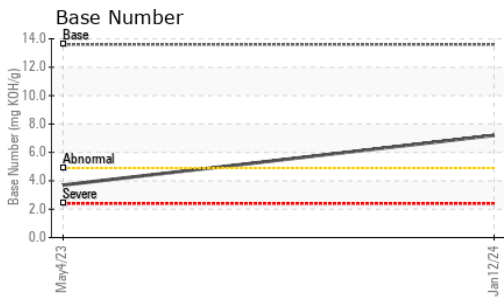

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0106790 **Received** : 17 Jan 2024
Lab Number : 06063302 **Diagnosed** : 19 Jan 2024
Unique Number : 10834684 **Diagnostician** : Don Baldrige
Test Package : MOBCE (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005

Contact: DUSTIN HATCHETT
 dustin.hatchett@jamesriverequipment.com

T:
 F: (804)798-0292