



OIL ANALYSIS REPORT

| | |
|-----------------|----------|
| WEAR | NORMAL |
| CONTAMINATION | ABNORMAL |
| FLUID CONDITION | NORMAL |

Machine Id
JOHN DEERE 6175R NUTRIDENSE 6175R (S/N 1RW6175RLGD026055)

Component
Hydraulic System

Fluid
{not provided} (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number | | Client Info | | JR0106791 | --- | --- |
| Sample Date | | Client Info | | 12 Jan 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 2297 | --- | --- |
| Oil Age | hrs | Client Info | | 500 | --- | --- |
| Filter Age | hrs | Client Info | | 500 | --- | --- |
| Oil Changed | | Client Info | | Not Chngd | --- | --- |
| Filter Changed | | Client Info | | Not Chngd | --- | --- |
| Sample Status | | | | ABNORMAL | --- | --- |

WEAR

All component wear rates are normal.

| PQ | UOM | Method | Limit/Abn | Current | History1 | History2 |
|--------------|--------|-------------|-----------|---------|----------|----------|
| Iron | ppm | ASTM D5185m | >20 | 22 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 2 | --- | --- |
| Lead | ppm | ASTM D5185m | >10 | 1 | --- | --- |
| Copper | ppm | ASTM D5185m | >75 | 8 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION











There is a high amount of silt (particulates < 14 microns in size) present in the oil.

| | | | | | | |
|------------------|--------|--------------|-----------|----------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | 4 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Particles >4µm | | ASTM D7647 | >5000 | 20652 | --- | --- |
| Particles >6µm | | ASTM D7647 | >1300 | 797 | --- | --- |
| Particles >14µm | | ASTM D7647 | >160 | 22 | --- | --- |
| Particles >21µm | | ASTM D7647 | >40 | 3 | --- | --- |
| Particles >38µm | | ASTM D7647 | >10 | 1 | --- | --- |
| Particles >71µm | | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | | ISO 4406 (c) | >19/17/14 | 22/17/12 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

| | | | | | | |
|------------------|----------|-------------|--|------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 0 | --- | --- |
| Boron | ppm | ASTM D5185m | | 2 | --- | --- |
| Barium | ppm | ASTM D5185m | | 3 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | <1 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 97 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 3279 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1035 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1209 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 4099 | --- | --- |
| Acid Number (AN) | mg KOH/g | ASTM D8045 | | 1.30 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445 | | 49.9 | --- | --- |

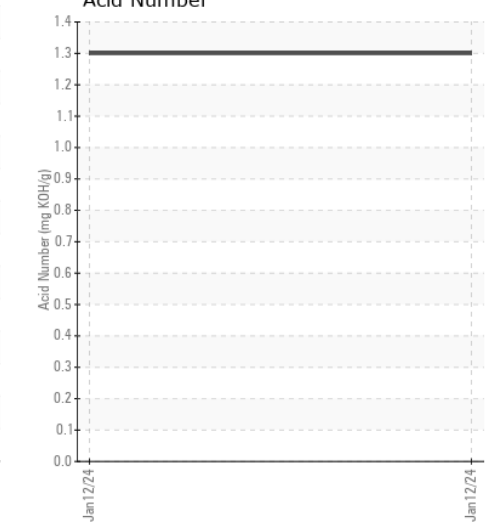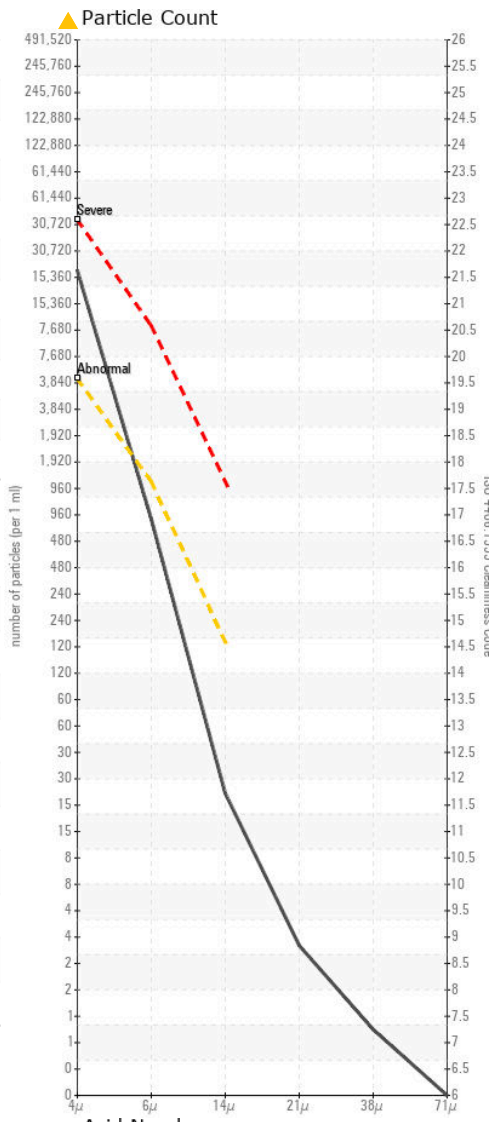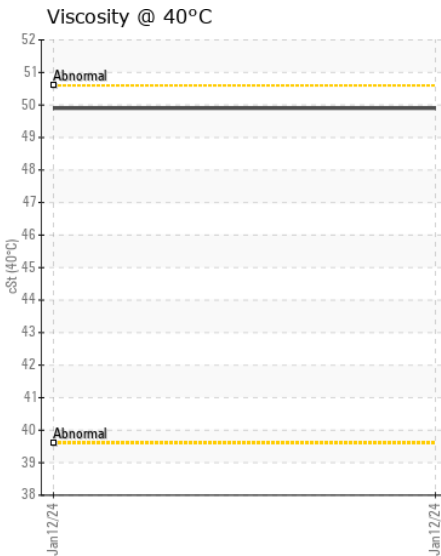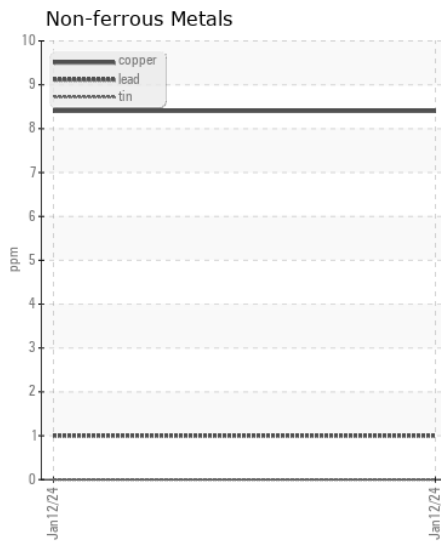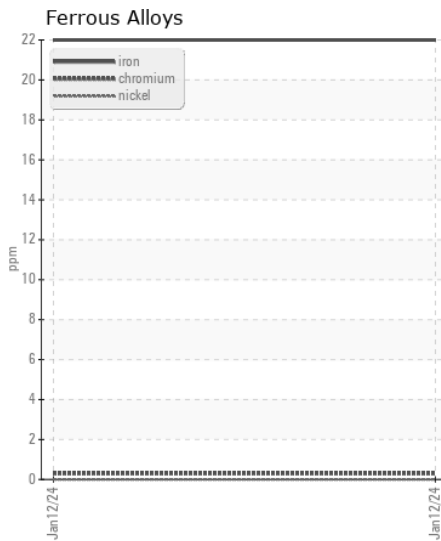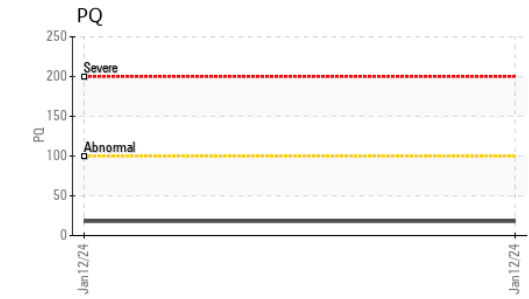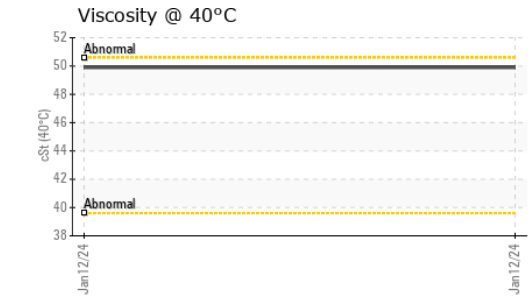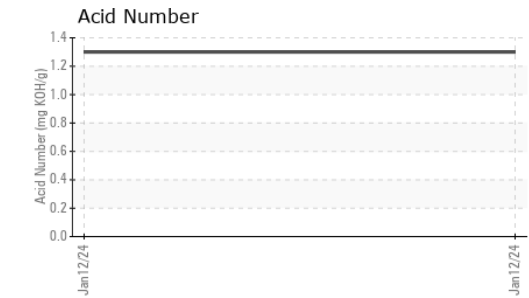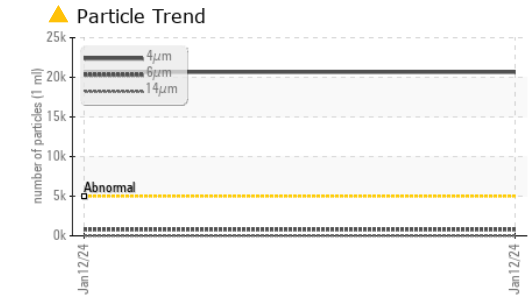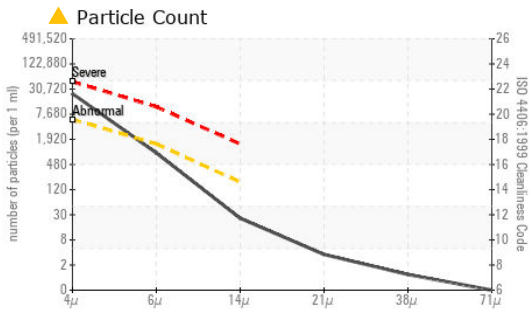

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0106791 **Received** : 17 Jan 2024
Lab Number : 06063521 **Diagnosed** : 19 Jan 2024
Unique Number : 10834903 **Diagnostician** : Don Baldrige
Test Package : MOBCE (Additional Tests: PQ)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005

Contact: DUSTIN HATCHETT
 dustin.hatchett@jamesriverequipment.com

T:
 F: (804)798-0292