



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**[44089]**  
 Machine Id  
**JOHN DEERE 1FF350PACNF000226**  
 Component  
**Left Final Drive**  
 Fluid  
**JOHN DEERE GL-5 80W90 (10 QTS)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0199329</b>	JR0187473	JR0176236
Sample Date		Client Info		<b>09 Jan 2024</b>	27 Sep 2023	10 Jul 2023
Machine Age	hrs	Client Info		<b>1483</b>	972	458
Oil Age	hrs	Client Info		<b>1483</b>	972	458
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>225</b>	154	175
Iron	ppm	ASTM D5185m	>750	<b>273</b>	248	208
Chromium	ppm	ASTM D5185m	>9	<b>4</b>	4	4
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m		<b>0</b>	5	0
Aluminum	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	1
Lead	ppm	ASTM D5185m	>15	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>40	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>14</b>	15	13
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	<1
Water		WC Method	>0.075	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	0	0
Boron	ppm	ASTM D5185m		<b>72</b>	95	87
Barium	ppm	ASTM D5185m		<b>1</b>	4	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	<1	<1
Manganese	ppm	ASTM D5185m		<b>5</b>	6	5
Magnesium	ppm	ASTM D5185m		<b>3</b>	3	0
Calcium	ppm	ASTM D5185m		<b>77</b>	18	7
Phosphorus	ppm	ASTM D5185m		<b>513</b>	523	503
Zinc	ppm	ASTM D5185m		<b>26</b>	20	9
Sulfur	ppm	ASTM D5185m		<b>16455</b>	17440	15502
Visc @ 40°C	cSt	ASTM D445		<b>187</b>	186	188

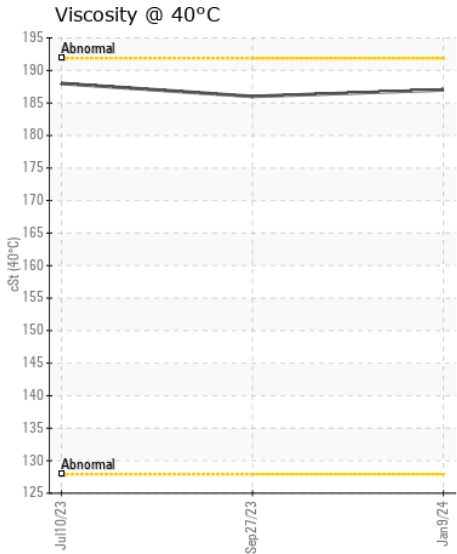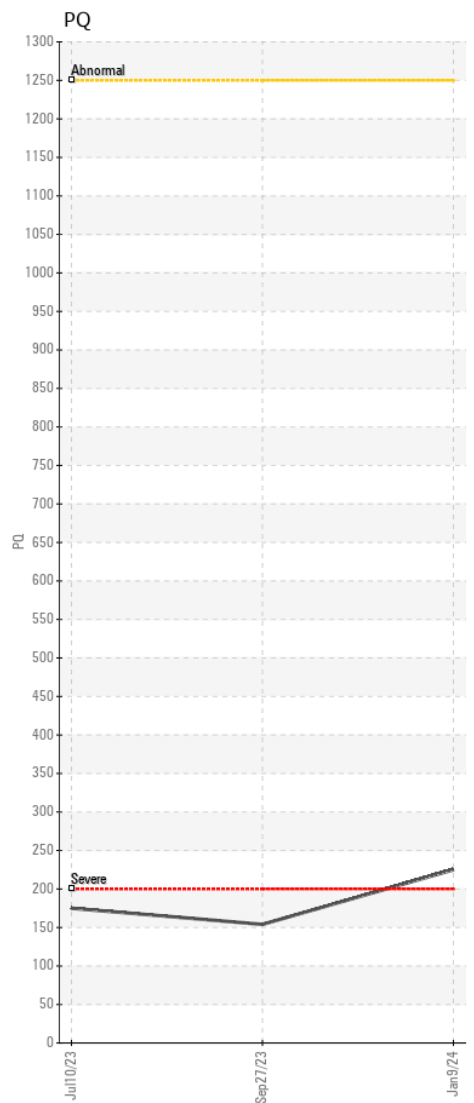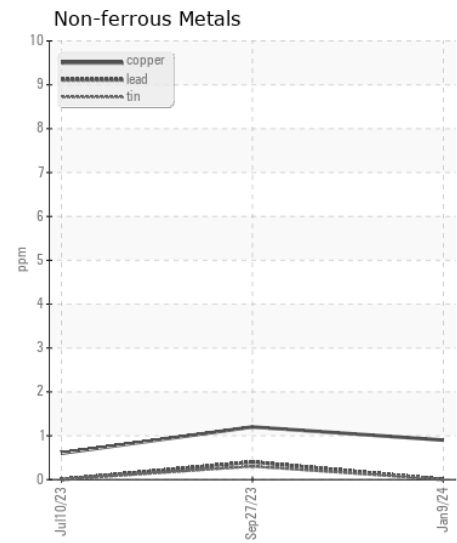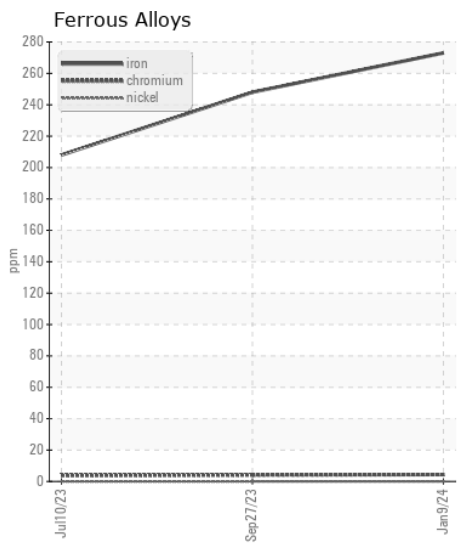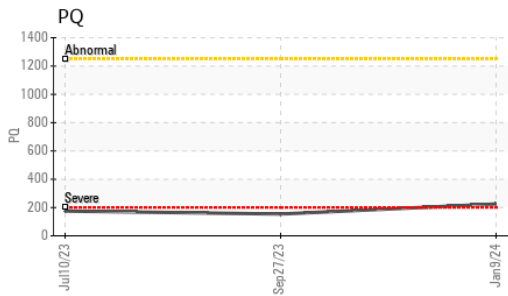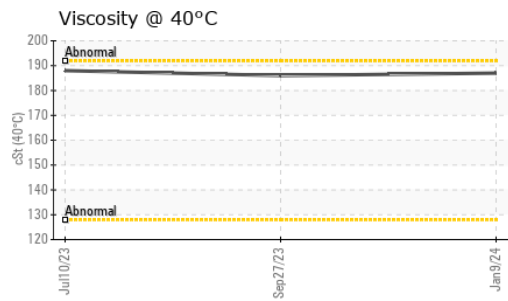

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0199329 **Received** : 17 Jan 2024  
**Lab Number** : 06063826 **Diagnosed** : 20 Jan 2024  
**Unique Number** : 10835208 **Diagnostician** : Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**CWS-STRITTMATTER**  
 9102 OWENS DR  
 MANASSAS PARK, VA  
 US 20111  
 Contact: EDDIE GARRETSON  
 egarretson@strittmattercompanies.com  
 T: (703)335-2255  
 F: (703)335-8095

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)