



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE PM061170
Component
Front Differential
Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0199484	JR0169163	JR0160039
Sample Date		Client Info		15 Jan 2024	07 Aug 2023	27 Jan 2023
Machine Age	hrs	Client Info		2468	1992	1452
Oil Age	hrs	Client Info		476	1992	1452
Filter Age	hrs	Client Info		0	0	477
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

PQ		ASTM D8184		11	12	16
Iron	ppm	ASTM D5185m	>500	13	14	11
Chromium	ppm	ASTM D5185m	>10	0	0	<1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	<1	1	<1
Lead	ppm	ASTM D5185m	>25	0	<1	<1
Copper	ppm	ASTM D5185m	>100	2	2	<1
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	3	4
Potassium	ppm	ASTM D5185m	>20	2	0	0
Water		WC Method	>.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	2	1
Boron	ppm	ASTM D5185m	6	3	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	2	0	<1
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m	145	113	105	97
Calcium	ppm	ASTM D5185m	3570	3289	3702	3515
Phosphorus	ppm	ASTM D5185m	1290	1031	1055	954
Zinc	ppm	ASTM D5185m	1640	1216	1274	1178
Sulfur	ppm	ASTM D5185m		3801	4150	3853
Visc @ 40°C	cSt	ASTM D445	57.0	54.6	52.8	53.5

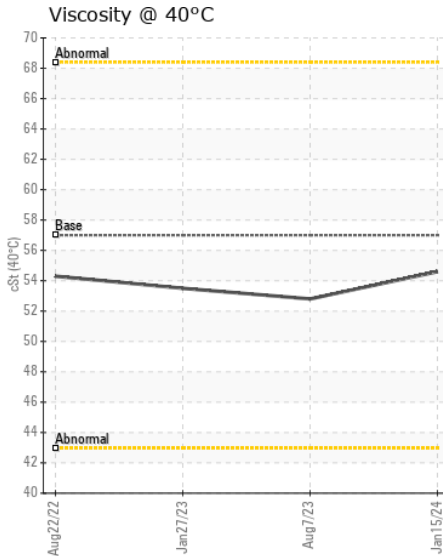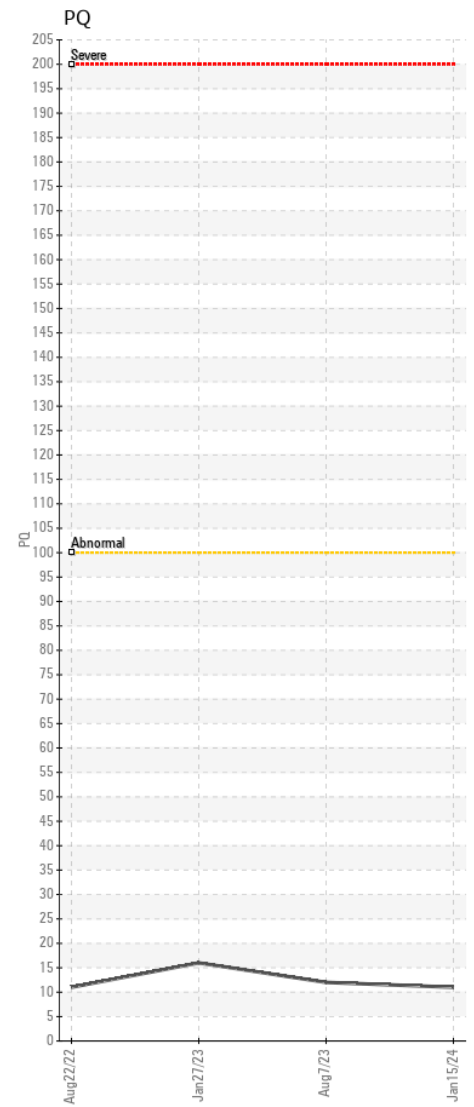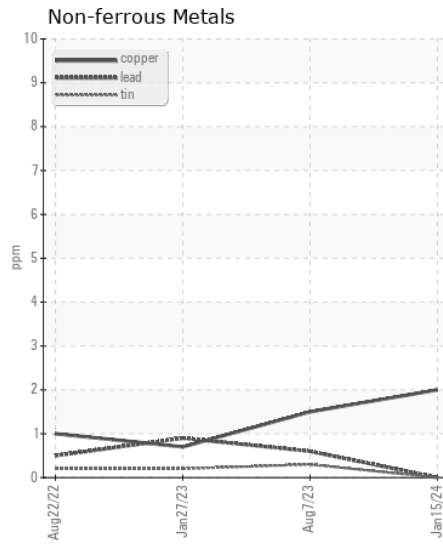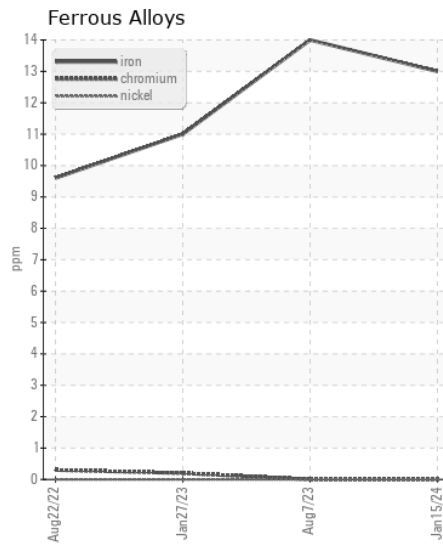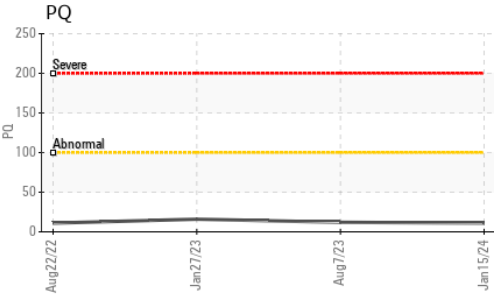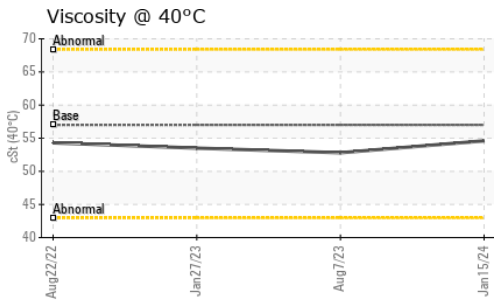

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0199484 **Received** : 17 Jan 2024
Lab Number : 06063836 **Diagnosed** : 19 Jan 2024
Unique Number : 10835218 **Diagnostician** : Wes Davis
Test Package : CONST (Additional Tests: PQ)

FITZGERALD EXCAVATING
 PO BOX 2168
 WINCHESTER, VA
 US 22604
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: